


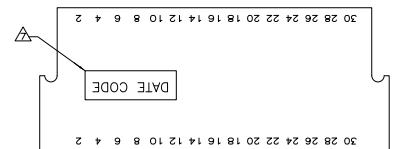



THIS DRAWING IS UNAPPROVED FOR PRODUCTION
 ALL WORK REQUIRED


REV	DATE	DESCRIPTION	BY	CHK
AD	00	SEE SHEET 1		

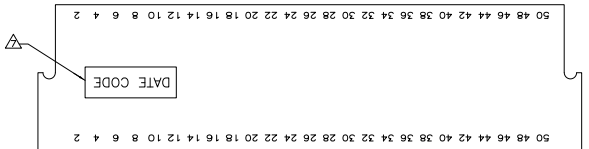

3-583717-4



3-583717-5

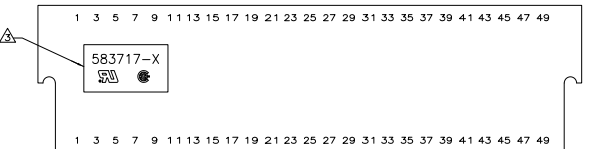

- △ FIRST 22 POSITIONS MARKED WITH UPPER CASE LETTERS, FOLLOWED BY LOWER CASE LETTERS, FOLLOWED BY UPPERCASE AA,AB,AC ETC. CHARACTERS G,I,O AND Q ARE OMITTED. SEE TABLE FOR END CAVITY IDENTIFICATION.
- △ OPTIONAL PULL GROOVES. THE PULL GROOVE LENGTH, SIZE AND LOCATION ARE AT THE DISCRETION OF THE MOLD VENDOR.
- △ HOUSING PART NUMBER, UL & CSA LOGO'S TO BE MOLDED IN THIS AREA. UL, LOGO PER 1-18838-3, CSA LOGO PER 1-18839-3.
- △ HOT STAMP CUSTOMER PART NUMBER 2571 0880 FOR 2-583717-9 ONLY.
- △ HOT STAMP CUSTOMER PART NUMBER 655862-2 IN THIS AREA.
- △ DATE CODE TO BE MOLDED IN THIS AREA
- △ MOLDED KEYING PLUG LOCATED BETWEEN CIRCUITS 25 AND 26 FOR PART NUMBER 4-583717-6 ONLY.
- △ PRELIMINARY - NOT RELEASED FOR PRODUCTION.

△	3 & C	10.67	15.24	10.16	5.08	3	4-583717-8	
		[.420]	[.600]	[.400]	[.200]			
	23 & A	61.47	66.04	60.96	55.88	23	4-583717-7	
		2.420	2.800	2.400	2.200			
△	30 & J	79.25	83.82	78.74	73.66	30	4-583717-6	
		3.120	3.300	3.100	2.900			
△	27 & E	71.63	76.20	71.12	66.04	27	4-583717-5	
		2.820	3.000	2.800	2.600			
	8 & J	23.37	27.94	22.86	17.78	8	3-583717-9	
		[.920]	[1.100]	[.900]	[.700]			
△	OBSELETE	13 & P	36.07	40.64	35.56	30.48	13	3-583717-8
		1.420	1.600	1.400	1.200			
△	OBSELETE	26 & e	65.53	71.12	66.04	60.96	26	3-583717-6
		2.620	2.800	2.600	2.400			
△	OBSELETE	16 & S	41.15	45.72	40.64	35.56	16	3-583717-4
		1.620	1.800	1.600	1.400			
	13 & P	36.07	40.64	35.56	30.48	13	3-583717-3	
		1.420	1.600	1.400	1.200			
	20 & X	53.85	58.42	53.34	48.26	20	3-583717-1	
		2.120	2.300	2.100	1.900			
△	OBSELETE	16 & S	41.15					
	14 & R	38.61						
OBSELETE	28 & f	74.17						
	7 & H	20.83						
		[.820]						
	6 & F	18.29						
		[.720]						
	50 & AF	130.05						
OBSELETE	40 & v	104.65						
	30 & j	79.25						
	25 & c	66.55						
	18 & V	2.320	2.500	2.300	2.100	18	583717-7	
		48.77	53.34	48.26	43.18			
		1.920	2.100	1.900	1.700			
	17 & U	46.23	50.80	45.72	40.64	17	583717-5	
		1.820	2.000	1.800	1.600			
	15 & S	41.15	45.72	40.64	35.56	15	583717-3	
		1.620	1.800	1.600	1.400			
	10 & L	28.45	33.02	27.94	22.86	10	583717-1	
		1.120	1.300	1.100	[.900]			
	END CAVITY IDENT	D	C	B	A	POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT. IN CHARGE: [Signature] DATE: [Date]

EMISSING: [Signature] DATE: [Date]

DATE: [Date]

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DATE: [Date] TIME: [Time] SHEET: 4-1 OF 2