



REV. NO.	DESCRIPTION	DATE	BY	CHKD
0	RELEASED	12JAN2004	SW	HW



.625-24 UNEF-2B THREAD

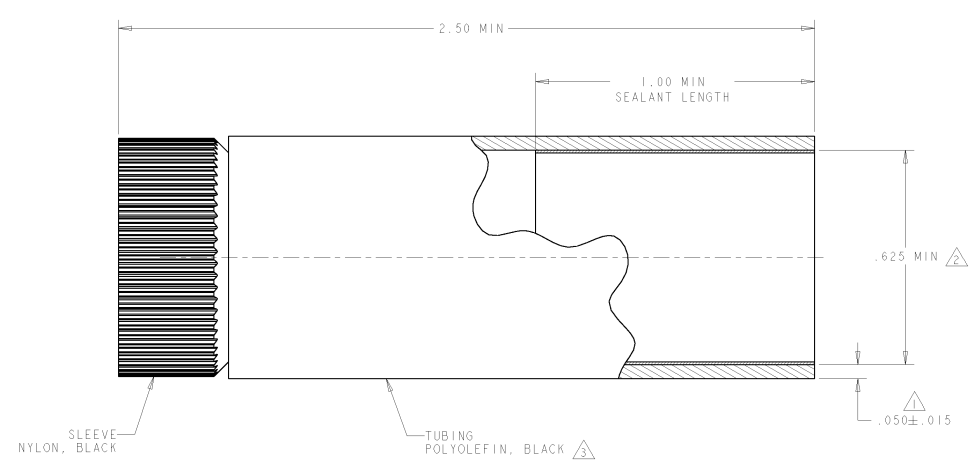

SLEEVE
NYLON, BLACK

TUBING
POLYOLEFIN, BLACK

- ▲ NOMINAL WALL THICKNESS, EXPANDED.
- ▲ EXPANDED INSIDE DIAMETER.
- ▲ .250 MAXIMUM RECOVERED INSIDE DIAMETER.
- 4. ASSEMBLY WILL PASS ONE POUND PER 50 INCH WATER PRESSURE TEST.
- 5. TUBING SHRINK TEMPERATURE: 250°F.
- 6. OPERATING TEMPERATURE: -67°F TO 230°F.
- 7. THIS PART WILL ACCOMMODATE \varnothing .250- \varnothing .600 CABLE RANGE.

1546921-1
PART NUMBER

DIMENSIONS: INCHES		FOR QUANTITIES SHOWN: OPERATING SPECIFICATIONS:		DWN S. WELDON 12JAN2004	CHN H. WAGHEM 12JAN2004	AMP Tyco Electronics Harrisburg, PA 17105-3400	STRAIN RELIEF ASSEMBLY, SIZE 11, MINI CPC	SHEET: A2 CASE CODE: 00778 DRAWING NO: 1546921	RESTRICTED TO:
		0 PLC #0 1 PLC #0.1 2 PLC #0.05 3 PLC #0.005 4 PLC #0.0008 ANGLES #0.0008		PRODUCED BY: H. WAGHEM 12JAN2004	APPLICATION SPEC:				