
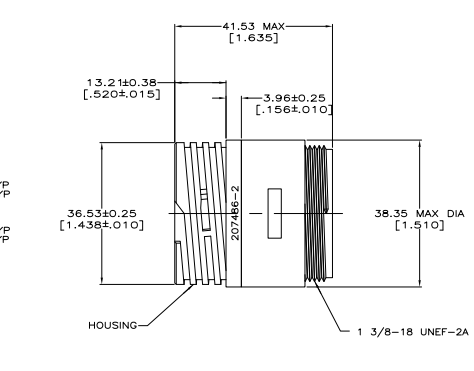


DETAIL A

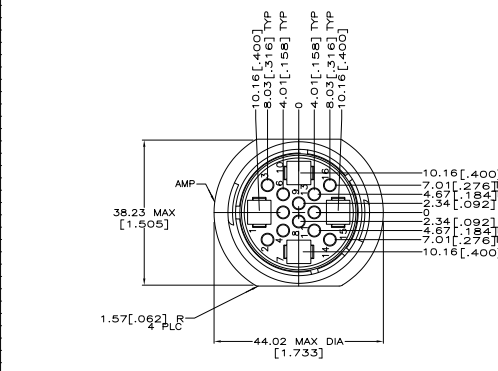

DETAIL B

1. WILL ACCEPT (12) MULTIMATE AND (4) TYPE XII PIN CONTACTS.
 2. CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
 3. NO. 4 FASTENERS RECOMMENDED FOR MOUNTING.
 4. THIS CONNECTOR WILL ACCEPT INSULATION DIAMETERS UP TO 3.81 [150].
- HOUSING: NYLON, BLACK.
 - PERIPHERAL SEAL: ELASTOMER, GRAY.
 - PERMANENT WHITE MARKED OR WHITE INK STAMPED CAVITY IDENTIFICATION.
 - HOUSING: NYLON, RED.
 - PERIPHERAL SEAL: ELASTOMER, GRAY.
 - WHITE DOT NEAR POSITION 1 ON WIRE ENTRY FACE.

PRELIMINARY	△	-	YES	A	1-207486-1
PRELIMINARY	△	-	YES	A	207486-9
PRELIMINARY	△	-	YES	A	207486-7
△	△	4	YES	A	207486-6
△	△	-	YES	A	207486-5
△	△	-	NO	B	207486-2
△	△	-	NO	A	207486-1

NOTES	THREADED INSERTS	PERIPHERAL SEAL	SEE DETAIL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 02/07/11. BY: J. BANNER. REV: 1. DATE: 02/07/11. PART NUMBER: 108-10024. REVISIONS: 108-10024. CUSTOMER DRAWING: A100779. DATE: 02/07/11. SIZE: 2:1. SHEET: 1 OF 1. P2