

4



3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		DATE	BY	APPD
FT	4	P	LTR	4/2/91		
		H1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

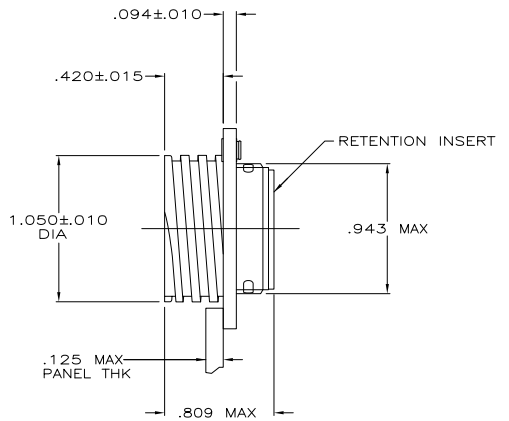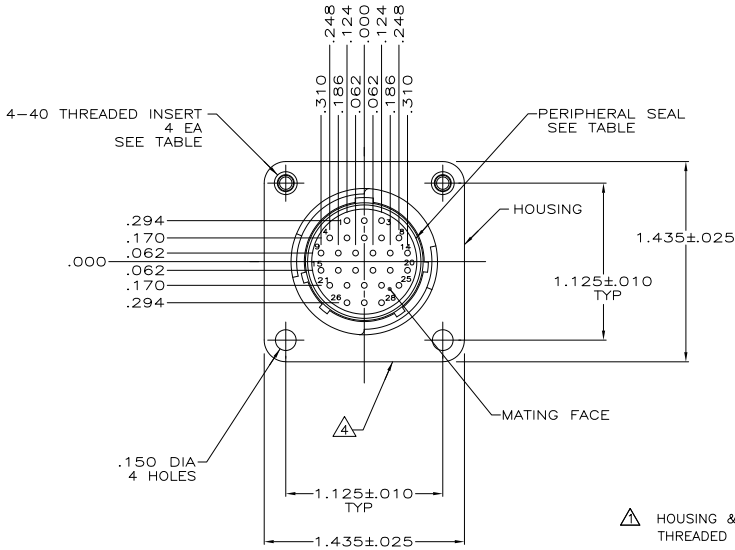

- △ HOUSING & RETENTION INSERT: THERMOPLASTIC, BLACK.
THREADED INSERTS: BRASS.
- 2. CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
- 3. WILL ACCEPT (28) SIZE 20 PIN CONTACTS.
- △ AMP AND PART NUMBER ANY EDGE.

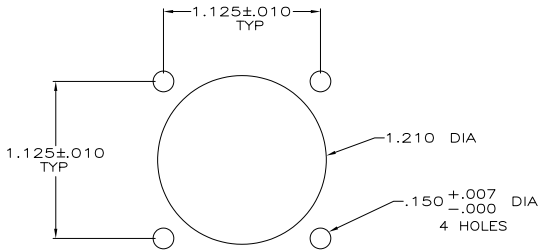

YES	YES	205840-5
NO	YES	205840-4
NO	NO	205840-3
PERIPHERAL SEAL	4-40 THREADED INSERTS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	4/3/91
DIMENSIONS:		BY	A. STAUB, BG
INCHES		CHKD.	7-24-92
OTHER DIMENSIONS:		APPD.	W. S. LENKER
0 PLC		DATE	7-24-92
1 PLC		NAME	K. BEAVER
2 PLC		PRODUCT SPEC.	108-10024
3 PLC		APPLICATION SPEC.	
4 PLC		SIZE	CAGE CODE
ANGLES		DRAWING NO.	A200779
FINISH		REVISION	C=205840
MATERIAL		WEIGHT	
△		CUSTOMER DRAWING	SCALE
			2:1
			SHEET
			1 of 1
			REV
			H1