


4 3 2 1
 DRAWING MADE IN THIRD ANGLE PROJECTION
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION , 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

MOD		LOC	DIST	REVISIONS			DATE	APPD
23	BD	39		ZONE	LTR	DESCRIPTION		
				D		REDRAWN AND REV PER ECN BD4183	9-8-90	K

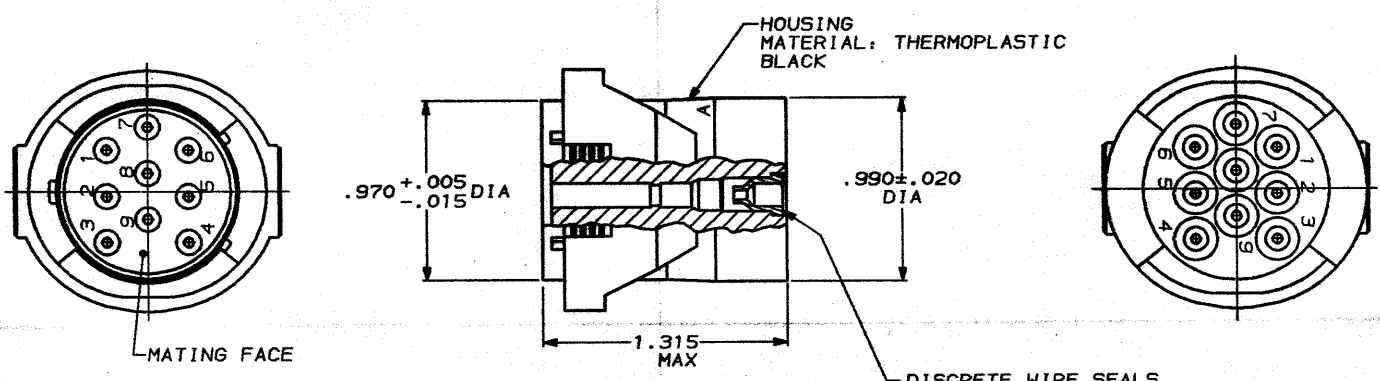

1. WIRE INSULATION SEALING RANGE: .070-.115 DIA.
2. MATES WITH 208538-1 OR 208546-1.
3. TOTAL LENGTH OF MATED CONNECTORS IS LESS THAN 2.50 INCHES.
4. THIN MEMBRANE PERMISSIBLE ON SMALL DIAMETER OF WIRE SEALS.

208530-1
 PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: FRACTIONS ± .005 DECIMALS ± .001 ANGLES ± 1°		OR 9-8-90 J. MULLER 90 CHK: J. Muller 1-4-91 APPD: H. Brando 1-18-91 APPD: J. Muller 1-29-91	AMP AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL		NAME		
SEE CALLOUT		PLUG, 9 POSITION, STANDARD ECONOSEAL CONNECTOR		
FINISH		SIZE	FSCH NO	DRAWING NO
-		B	00779	208530
WEIGHT		SCALE	SHEET	
-		2:1	1 OF 1	

AMP 1470-15 REV 3-90
 02 NOV 1990 11:30:16 AM T0842

CUSTOMER DRAWING