


DRAWING MADE IN THIRD ANGLE PROJECTION


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

MOD	LOG	DTM	P	F	ZONE	LTR	REVISIONS	DESCRIPTION	DATE	APPD
23	BD	39				E	1	REDRAWN AND REV PER ECN BD4183	8-17-80	16





.564
MAX

MATING FACE

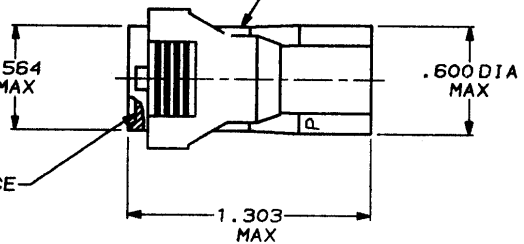

HOUSING MATERIAL: THERMOPLASTIC BLACK

.536
MAX



DISCRETE WIRE SEALS MATERIAL: ELASTOMER BLACK

1. WIRE INSULATION SEALING RANGE .070-.130 DIA.
2. THIN MEMBRANE PERMISSIBLE ON SMALL DIAMETER OF WIRE SEALS.
3. ROTATION OF CAVITY CIRCUIT KEY FROM PART TO PART IS PERMISSIBLE.

207845-1
PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: S PLC DEC * - S PLC DEC * - ANGLES * -	DR 8-17-80 J GALLUCCI BD	AMP INCORPORATED Harrisburg, Pa. 17105	
	CHK <i>J. Gallucci</i> 8-91 APPD <i>A. Buerer</i> 1-18-91	NAME	PLUG, 2 POSITION, STANDARD ECONOSEAL CONNECTOR
MATERIAL SEE CALLOUT	APPD <i>J. Gallucci</i> 1/24/91	PRODUCT SPEC	SIZE B FSN NO 00779 DRAWING NO 207845
FINISH -	APPLICATION SPEC -	WEIGHT -	SCALE 2:1 SHEET 1 OF 1

CUSTOMER DRAWING

AMP 1470-15 REV 3-80
06 NOV 1990 16:34:36 AMET0842