

Features

- 80 MHz -3 dB bandwidth for gains of 1 to 10
- 800 V/ μ s slew rate
- 15 MHz bandwidth flat to 0.1 dB
- Excellent differential gain and phase
- TTL/CMOS compatible DC restore function
- Available in 16 lead P-DIP, 16 lead SOL

Applications

- RGB drivers requiring DC restoration
- RGB multiplexers requiring DC restoration
- RGB building blocks
- Video gain blocks requiring DC restoration
- Sync and color burst processing

Ordering Information

| Part No. | Temp. Range | Package | Outline # |
|----------|--|--------------|-----------|
| EL4390CN | -40°C to $+85^{\circ}\text{C}$ | 16-Pin P-DIP | MDP0031 |
| EL4390CM | -40°C to $+85^{\circ}\text{C}$ | 16-Lead SOL | MDP0027 |


General Description

The EL4390C is three wideband current-mode feedback amplifiers optimized for video performance, each with a DC restore amplifier. The DC restore function is activated by a common TTL/CMOS compatible control signal while each channel has a separate restore reference.

Each amplifier can drive a load of 150Ω at video signal levels. The EL4390C operates on supplies as low as $\pm 4\text{V}$ up to $\pm 15\text{V}$.

Being a current-mode feedback design, the bandwidth stays relatively constant at approximately 80MHz over the ± 1 to ± 10 gain range. The EL4390C has been optimized for use with 1300Ω feedback resistors.

Connection Diagram

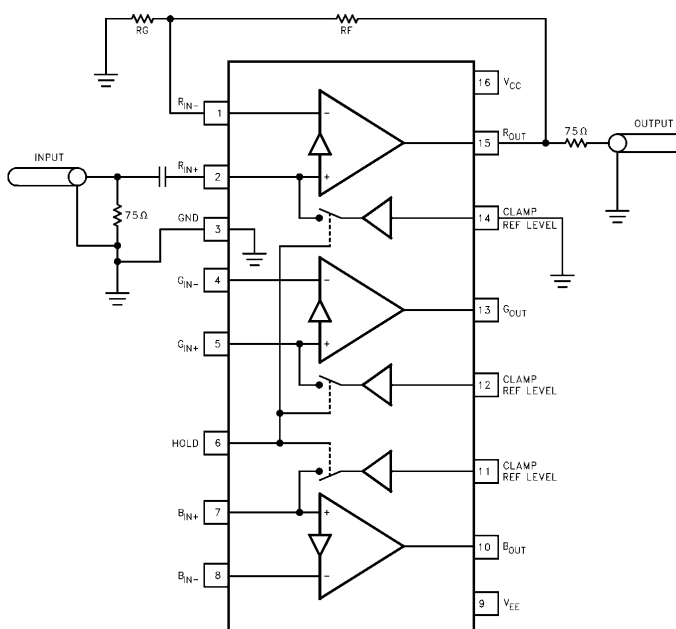

4390-1

EL4390C

Triple 80 MHz Video Amplifier with DC Restore

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)

| | | | |
|---|-----------------|--------------------------------|-----------------|
| Voltage between V_S+ and V_S- | +33V | Internal Power Dissipation | See Curves |
| Voltage at V_S+ | +18V | Operating Ambient Temp. Range | -40°C to +85°C |
| Voltage at V_S- | -18V | Operating Junction Temperature | 150°C |
| Voltage between V_{IN+} and V_{IN-} | $\pm 6\text{V}$ | Storage Temperature Range | -65°C to +150°C |
| Current into V_{IN+} and V_{IN-} | 5mA | | |

Important Note:

All parameters having Min/Max specifications are guaranteed. The Test Level column indicates the specific device testing actually performed during production and Quality inspection. Elantec performs most electrical tests using modern high-speed automatic test equipment, specifically the LTX77 Series system. Unless otherwise noted, all tests are pulsed tests, therefore $T_J = T_C = T_A$.

| Test Level | Test Procedure |
|------------|---|
| I | 100% production tested and QA sample tested per QA test plan QCX0002. |
| II | 100% production tested at $T_A = 25^\circ\text{C}$ and QA sample tested at $T_A = 25^\circ\text{C}$, T_{MAX} and T_{MIN} per QA test plan QCX0002. |
| III | QA sample tested per QA test plan QCX0002. |
| IV | Parameter is guaranteed (but not tested) by Design and Characterization Data. |
| V | Parameter is typical value at $T_A = 25^\circ\text{C}$ for information purposes only. |

Open Loop DC Electrical Characteristics Supplies at $\pm 15\text{V}$, Load = $1\text{k}\Omega$

| Parameter | Description | Temp | Min | Typ | Max | Test Level | Units |
|---|---|-------|----------|----------|-----|------------|------------------|
| Amplifier Section (not restored) | | | | | | | |
| V_{OS} | Input Offset Voltage | +25°C | | 2 | 15 | II | mV |
| I_{B+} | I_{IN+} Input Bias Current | +25°C | | 0.2 | 5 | II | μA |
| I_{B-} | I_{IN-} Input Bias Current | +25°C | | 10 | 65 | II | μA |
| R_{OL} | Transimpedance (Note 1) | +25°C | 100 | 220 | | II | $\text{k}\Omega$ |
| R_{IN-} | I_{N-} Resistance | +25°C | | 50 | | V | Ω |
| CMRR | Common-Mode Rejection Ratio (Note 2) | +25°C | 50 | 56 | | II | dB |
| PSRR | Power Supply Rejection Ratio (Note 4) | +25°C | 50 | 70 | | II | dB |
| V_O | Output Voltage Swing; $R_L = 1\text{k}\Omega$ | +25°C | ± 12 | ± 13 | | II | V |
| I_{SC} | Short-Circuit Current | +25°C | 45 | 70 | 100 | II | mA |
| I_{SY} | Supply Current (Quiescent) | +25°C | 10 | 20 | 32 | II | mA |
| Restoring Section | | | | | | | |
| $V_{OS, COMP}$ | Composite Input Offset Voltage (Note 3) | +25°C | | 8 | 35 | II | mV |
| $I_{B+, R}$ | Restore I_{IN+} Input Bias Current | +25°C | | 0.2 | 5 | II | μA |
| I_{OUT} | Restoring Current Available | +25°C | 2 | 4 | | II | mA |
| PSRR | Power Supply Rejection Ratio (Note 4) | +25°C | 50 | 70 | | II | dB |
| G_{OUT} | Conductance | +25°C | | 8 | | V | mA/V |
| $I_{SY, RES}$ | Supply Current, Restoring | +25°C | 10 | 23 | 37 | II | mA |
| $V_{IL, RES}$ | RES Logic Low Threshold | +25°C | | 1.0 | 1.4 | II | V |
| $V_{IH, RES}$ | RES Logic High Threshold | +25°C | 1.4 | 1.8 | | II | V |

EL4390C

Triple 80 MHz Video Amplifier with DC Restore

Open Loop DC Electrical Characteristics Supplies at $\pm 15\text{V}$, Load = $1\text{K}\Omega$ — Contd.

| Parameter | Description | Temp | Min | Typ | Max | Test Level | Units |
|--------------------------|-------------------------------|--------|-----|-----|-----|------------|---------------|
| Restoring Section | | | | | | | |
| $I_{IL, RES}$ | RES Input Current, Logic Low | + 25°C | | 2 | 10 | II | μA |
| $I_{IH, RES}$ | RES Input Current, Logic High | + 25°C | | 0.5 | 3 | II | μA |

Note 1: For current feedback amplifiers, $A_{VOL} = R_{OL}/R_{IN}$.

Note 2: $V_{CM} = \pm 10\text{V}$ for $V_S = \pm 15\text{V}$.

Note 3: Measured from V_{CL} to amplifier output, while restoring.

Note 4: V_{QS} is measured at $V_S = \pm 4.5\text{V}$ and $V_S = \pm 16\text{V}$, both supplies are changed simultaneously.

Closed Loop AC Electrical Characteristics

Supplies at $\pm 15\text{V}$, Load = 150Ω and 15 pF , $T_A = 25^\circ\text{C}$ (See note 7 re: test fixture)

| Parameter | Description | Min | Typ | Max | Test Level | Units |
|-------------------|--|-----|------|-----|------------|-------|
| Amplifier Section | | | | | | |
| SR | Slew Rate (Note 5) | | 800 | | V | V/μs |
| SR | Slew Rate w/ ±5V Supplies (Note 5) | | 550 | | V | V/μs |
| BW | Bandwidth, −3dB, A _V = 1 ±5V Supplies, −3dB | | 95 | | V | MHz |
| | | | 72 | | V | MHz |
| BW | Bandwidth, −0.1 dB ±5V Supplies, −0.1dB | | 20 | | V | MHz |
| | | | 14 | | V | MHz |
| dG | Differential Gain at 3.58 MHz at ±5V Supplies (Note 6) | | 0.02 | | V | % |
| | | | 0.02 | | V | % |
| dθ | Differential Phase at 3.58 MHz at ±5V Supplies (Note 6) | | 0.03 | | V | (°) |
| | | | 0.06 | | V | (°) |
| Restoring Section | | | | | | |
| T _{RE} | Time to Enable Restore | | 35 | | V | ns |
| T _{RD} | Time to Disable Restore | | 35 | | V | ns |

Note 5: SR is measured at 20% to 80% of 4V pk-pk square wave, with $A_V = 5$, $R_F = 820\Omega$, $R_G = 200\Omega$.

Note 6: DC offset from -0.714V to $+0.714\text{V}$, AC amplitude is 286m Vp-p , equivalent to 40 ire .

Note 7: Test fixture was designed to minimize capacitance at the I_N- input. A "good" fixture should have less than 2 pF of stray capacitance to ground at this very sensitive pin. See application notes for further details.

EL4390C

Triple 80 MHz Video Amplifier with DC Restore

Table 1. Charge Storage Capacitor Value vs. Droop and Charging Rates

| Cap Value (nF) | Droop in 60 μ S (mV) | Charge in 2 μ S (mV) | Charge in 4 μ S (mV) |
|-------------------|-----------------------------|-----------------------------|-----------------------------|
| 10 | 30 | 400 | 800 |
| 22 | 13.6 | 182 | 364 |
| 47 | 6.4 | 85 | 170 |
| 100 | 3.0 | 40 | 80 |
| 220 | 1.36 | 18 | 36 |

These numbers represent the worst case bias current, and the worst case charging current. Note that to get the full (2mA+) charging current, the clamp input must have >250mV of error voltage.

Note that the magnitude of the bias current will decrease as temperature increases.

The basic droop formula is :

$$V(\text{droop}) = I_{B+} \times (\text{Line time} - \text{Charge time}) / \text{capacitor value}$$

and the basic charging formula is:

$$V(\text{charge}) = I_{OUT} \times \text{Charge time} / \text{capacitor value}$$


Where I_{OUT} is:

$$I_{OUT} = (\text{Clamp voltage} - I_{N+} \text{ voltage}) / 120$$


EL4390C

Triple 80 MHz Video Amplifier with DC Restore


Typical Performance Curves

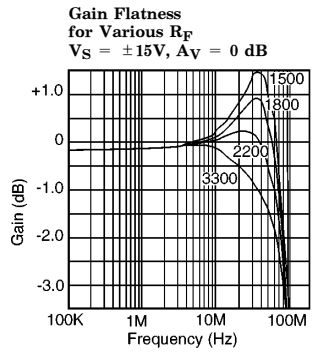


4390-2

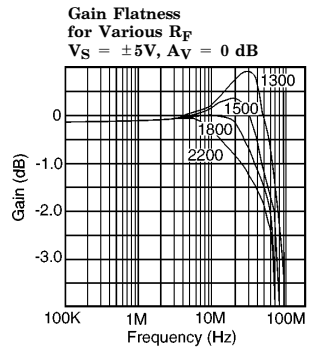


4390-3




4390-4

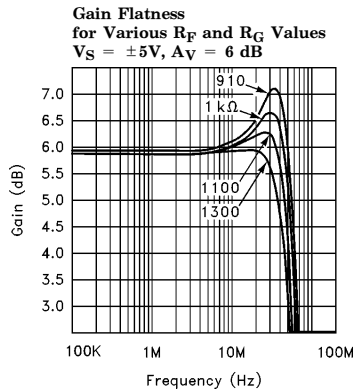


4390-6




4390-5

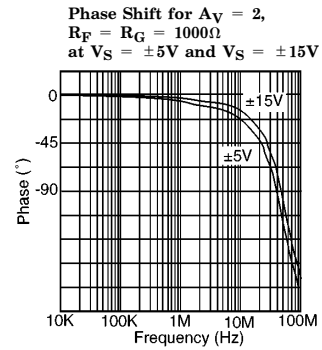


4390-7

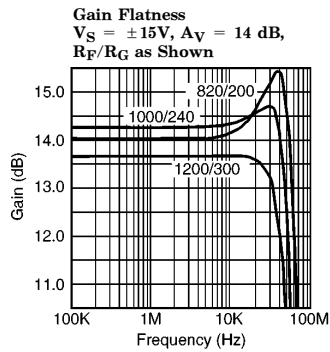

4390-8

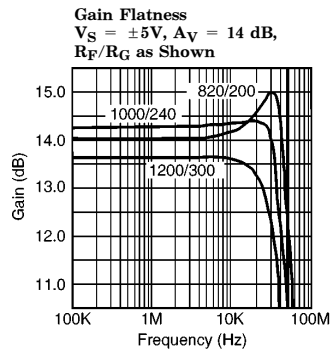

4390-9

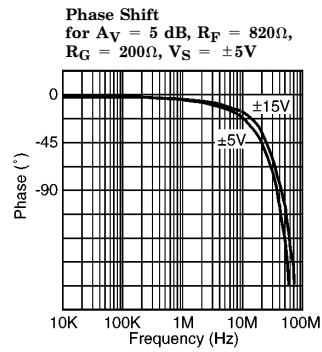


4390-10


EL4390C

Triple 80 MHz Video Amplifier with DC Restore


Typical Performance Curves — Contd.




4390-11




4390-12

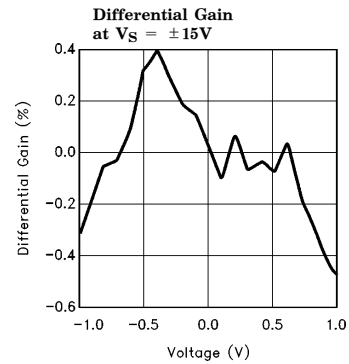


4390-17

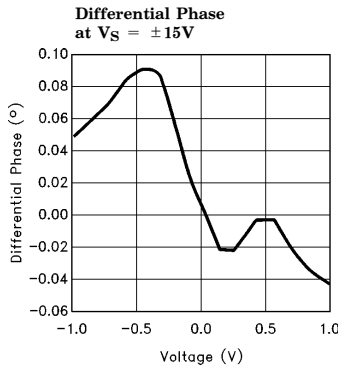


4390-18

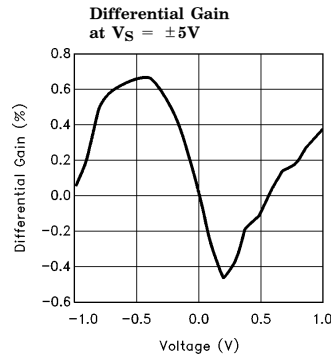


4390-19

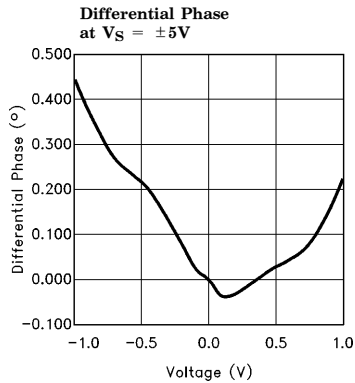


4390-20

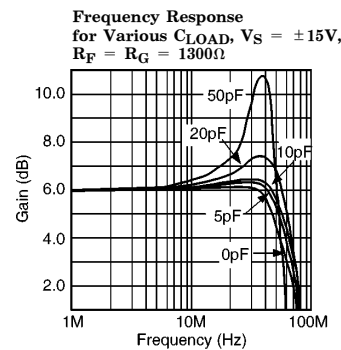

4390-13

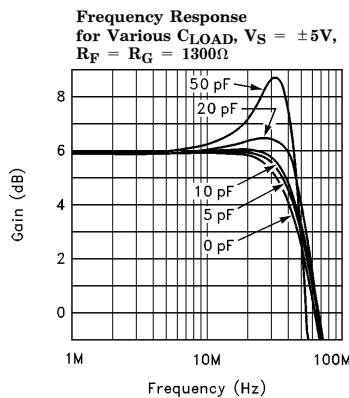

4390-14

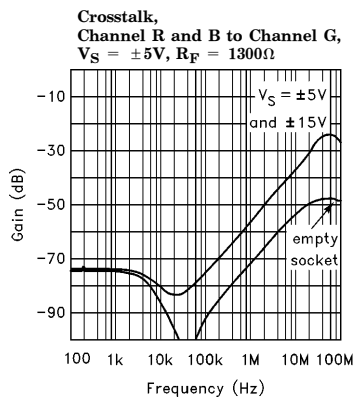


4390-15

EL4390C


Triple 80 MHz Video Amplifier with DC Restore

Typical Performance Curves — Contd.


**Crosstalk, Channel R and G to Channel B,
 $V_S = \pm 5V$, $R_F = 1300\Omega$**

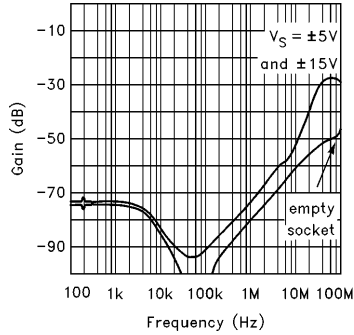


I_{N+} Input Impedance during HOLD, $V_S = \pm 5V$

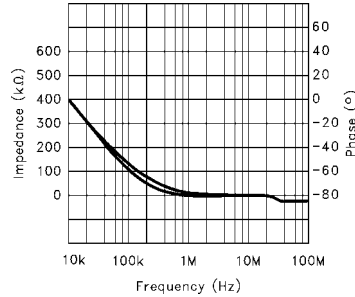


I_{N+} Input Impedance during SAMPLE, $V_S = \pm 5V$

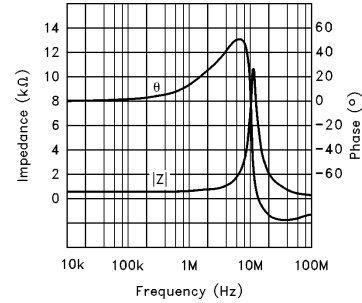


**Phase Shift at I_{N+} Pin during Restore,
 $R_S = 75\Omega$ and 150Ω , $V_S = \pm 5V$**

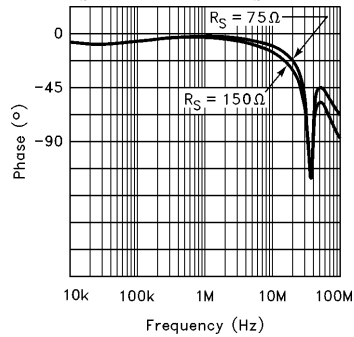


I_{OUT} Restoring vs Clamp, Voltage at $V_S = \pm 5V$

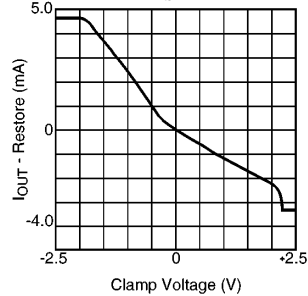


Pulse Response with $A_V = 2$, $R_F = R_G = 1300\Omega$ at $V_S = \pm 5V$

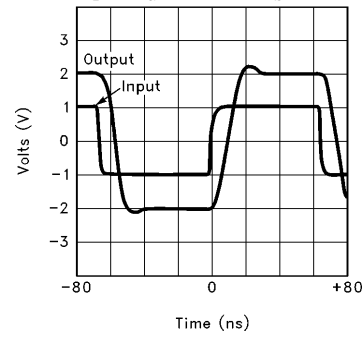


**Output during DC-Restoration, Showing DC Droop
 $R_F = R_G = 1300\Omega$, $V_S = \pm 5V$**

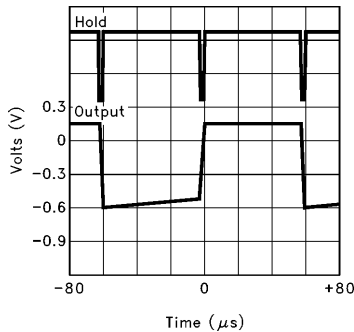

Output during DC-Restoration, $R_F = R_G = 1300\Omega$, $V_S = \pm 5V$

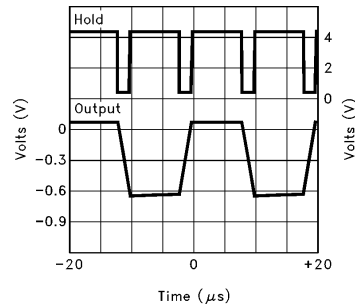

Pulse Response with $A_V = 5$, $R_F = 820\Omega$ and $R_G = 200\Omega$ at $V_S = \pm 15V$

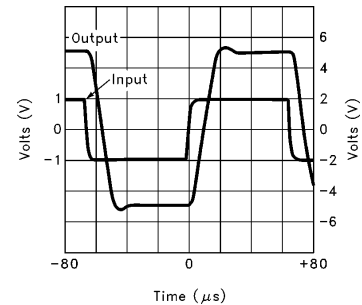


EL4390C

Triple 80 MHz Video Amplifier with DC Restore


Typical Performance Curves — Contd.

Maximum Power Dissipation
vs Ambient Temperature—
16-Pin PDIP




4390-29

Maximum Power Dissipation
vs Ambient Temperature—
16-Pin SOL



4390-30

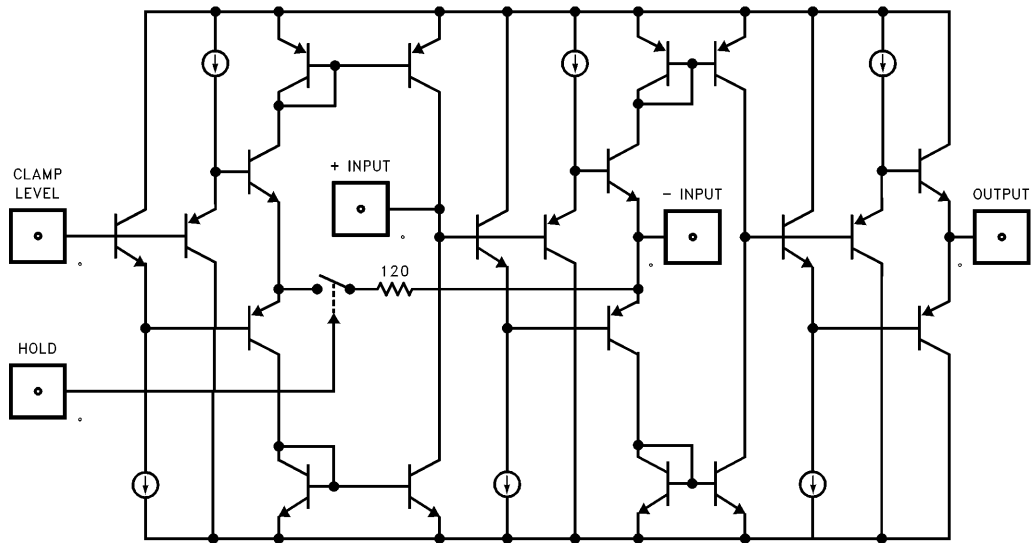

4390-31

Simplified Schematic of One Channel of EL4390

EL4390C

Triple 80 MHz Video Amplifier with DC Restore

Applications Information

Circuit Operation

Each channel of the EL4390 contains a current feedback amplifier and a TTL/CMOS compatible clamp circuit. The current that the clamp can source or sink into the non-inverting input is approximately:

$$I = (V_{CLAMP} - V_{IN+}) / 120$$

So, when the non-inverting input is at the same voltage as the clamp reference, no current will flow, and hence no charge is added to the capacitor. When there is a difference in voltage, current will flow, in an attempt to cancel the error AT THE NON-INVERTING input. The amplifier's offset voltage and $(I_{B-} \times R_F)$ DC errors are not cancelled with this loop. It is purely a method of adding a controlled DC offset to the signal.

As well as the offset voltage error, which goes up with gain, and the $I_{B-} \times R_F$ error which drops with gain, there is also the I_{B+} error term. Since the amplifier is capacitively coupled, this small current is slowly integrated and shows up as a very slow ramp voltage. Table below shows the output voltage drift in 60 μ S for various values of coupling capacitor, all assuming the very worst I_{B+} current.

Table 1. Charge Storage Capacitor Value vs. Droop and Charging Rates

| Cap Value (nF) | Droop in 60 μ S (mV) | Charge in 2 μ S (mV) | Charge in 4 μ S (mV) |
|-------------------|-----------------------------|-----------------------------|-----------------------------|
| 10 | 30 | 400 | 800 |
| 22 | 13.6 | 182 | 364 |
| 47 | 6.4 | 85 | 170 |
| 100 | 3.0 | 40 | 80 |
| 220 | 1.36 | 18 | 36 |

In normal circuit operation, the picture content will also cause a slow change in voltage across the capacitor, so at every back porch time period, these error terms can be corrected.

When a signal source is being switched, eg. from two different surveillance cameras, it is recommended to synchronize the switching with the vertical blanking period, and to drive the HOLD pin (pin 6) low, during these lines. This will ensure that the system has been completely restored, regardless of the average intensity of the two pictures.

Application Hints

Figures 1 & 2 shows a three channel DC-restoring system, suitable for R-G-B or Y-U-V component video, or three synchronous composite signals.

Figure 1 shows the amplifiers configured for non-inverting gain, and Figure 2 shows the amplifiers configured for inverting gains. Note that since the DC-restoring function is accomplished by clamping the amplifier's non-inverting input, during the back porch period, any signal on the non-inverting input will be distorted. For this reason, it is recommended to use the inverting configuration for composite video, since this avoids the color burst being altered during the clamp time period.

Since all three amplifiers are monolithic, they run at the same temperature, and will have very similar input bias currents. This can be used to advantage, in situations where the droop voltage needs to be compensated, since a single trim circuit can be used for all three channels. A 560K Ω or similar value resistor helps to isolate each signal. See Figure 2. The advantage of compensating for the droop voltage, is that a smaller capacitor can be used, which allows a larger level restoration within one line. See Table 1 for values of capacitor and charge/droop rates.

EL4390C

Triple 80 MHz Video Amplifier with DC Restore

Applications Information — Contd.

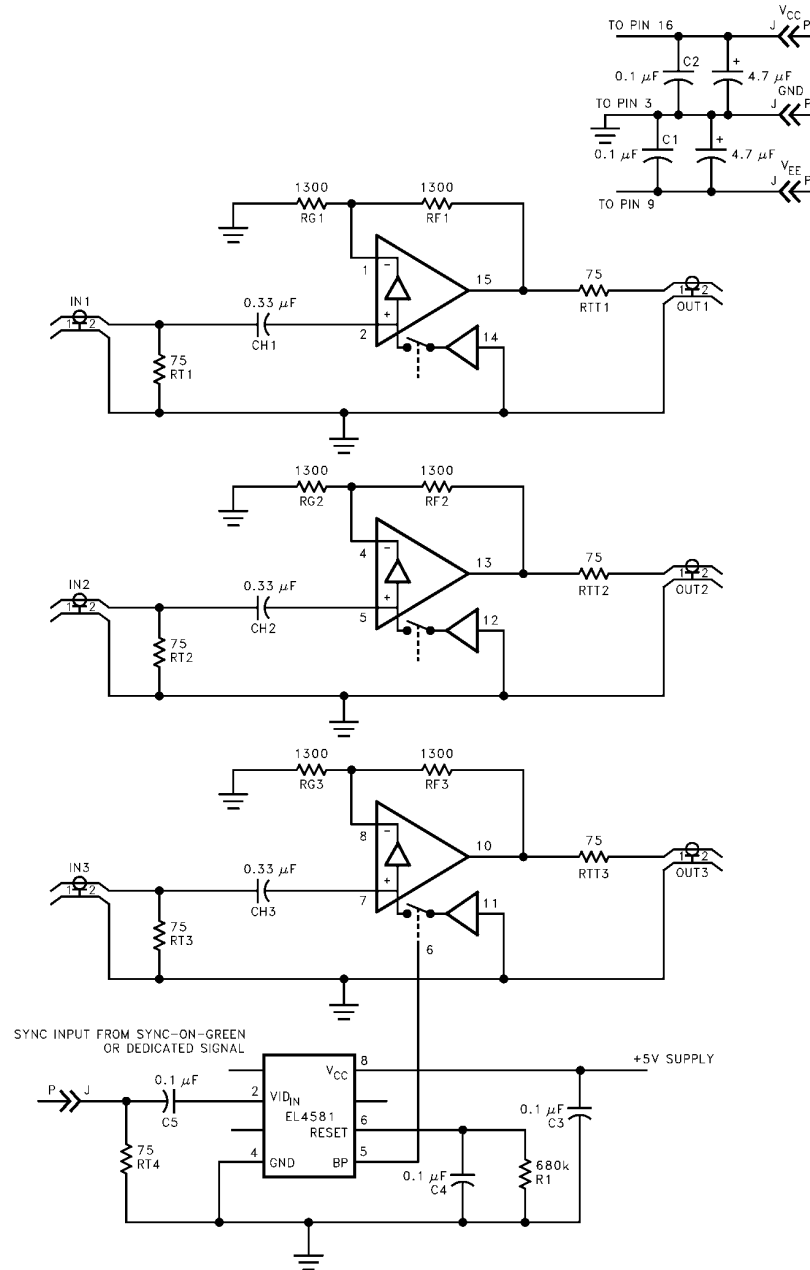


Figure 1

4390-32

Triple 80 MHz Video Amplifier with DC Restore

Applications Information — Contd.

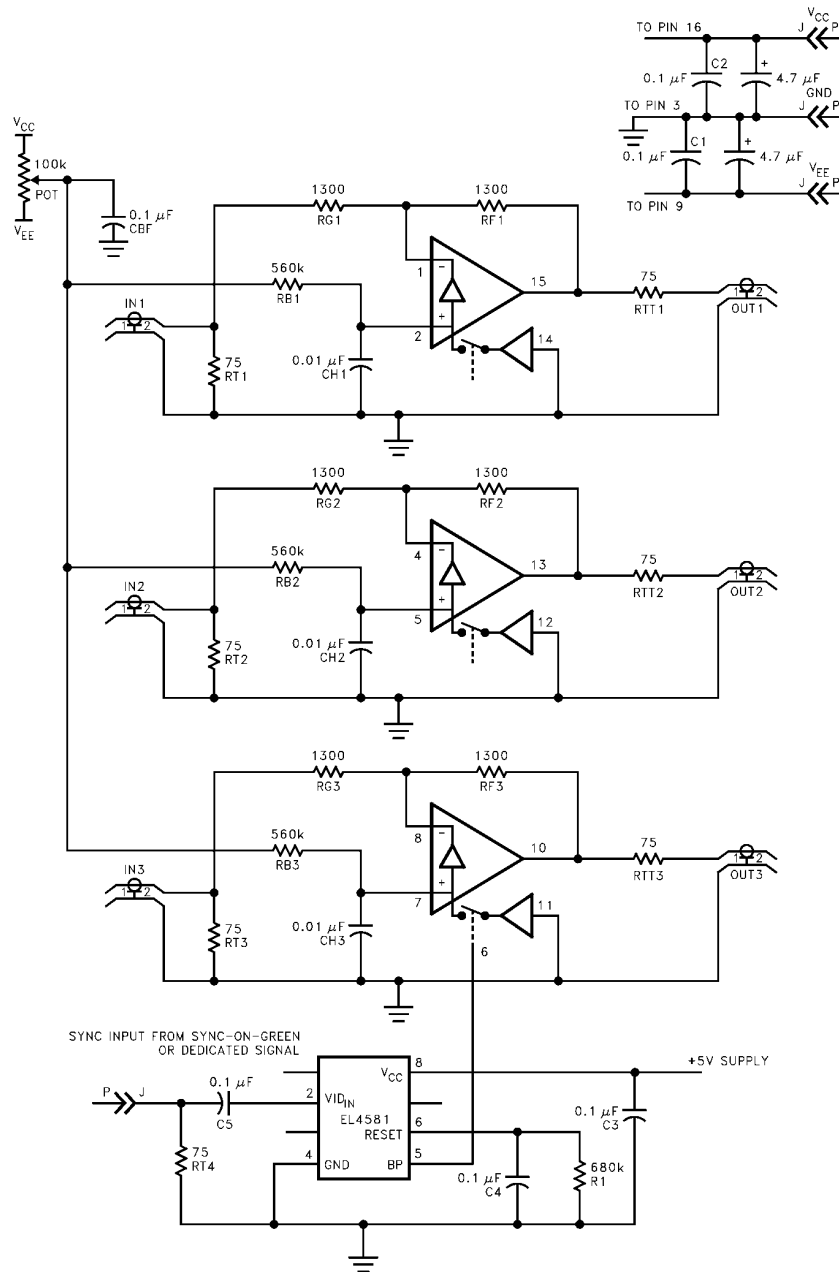


Figure 2

4390-33

EL4390C

Triple 80 MHz Video Amplifier with DC Restore

Applications Information — Contd.

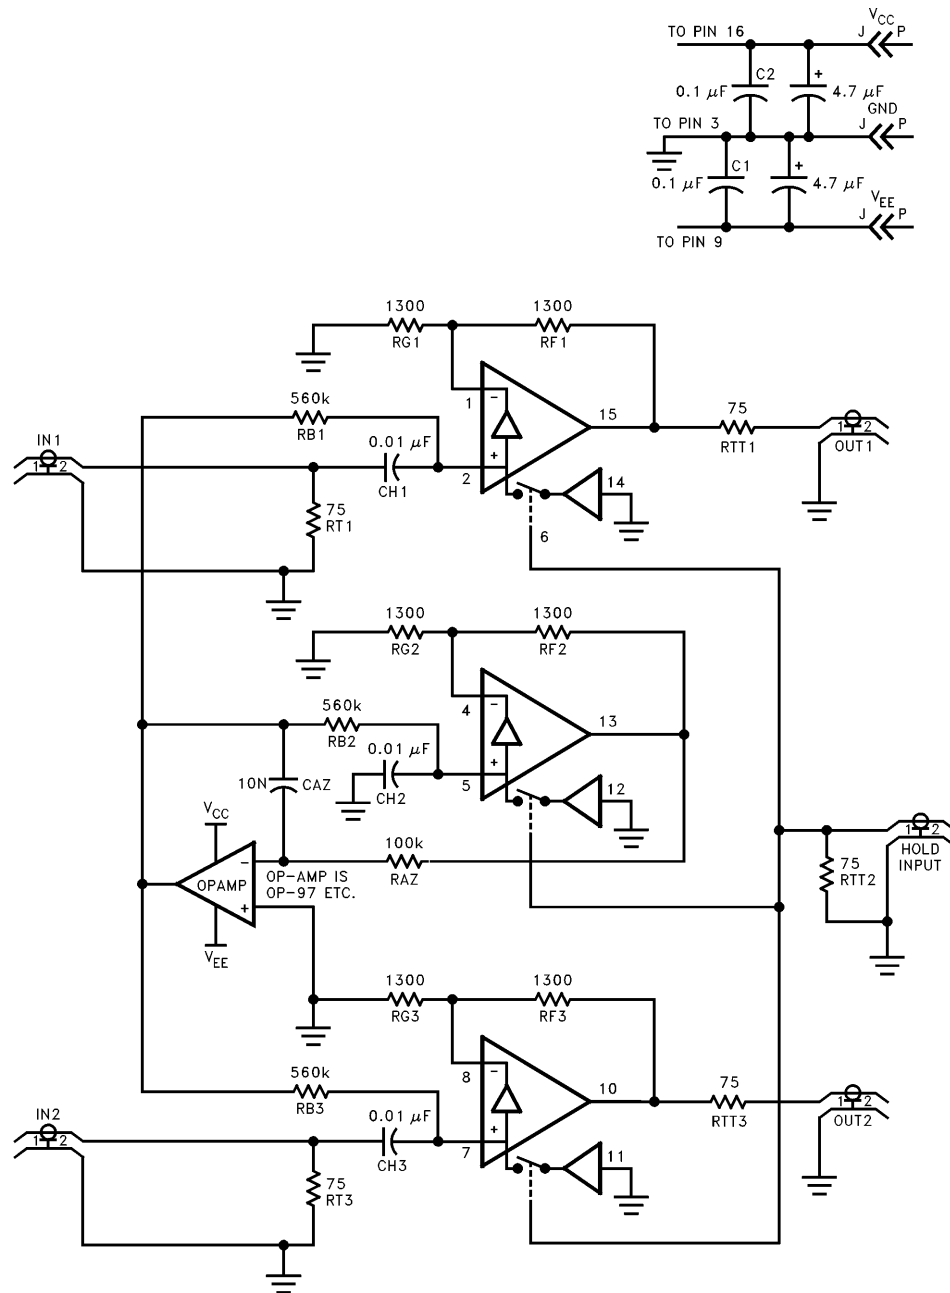


Figure 3

4390-34

EL4390C

Triple 80 MHz Video Amplifier with DC Restore

Applications Information — Contd.

In Figure 3, one of the three channels is used, together with a low-offset op-amp, to automatically trim the bias current of the other two channels. The two remaining channels are shown in the non-inverting configuration, but could equally well be set to provide inverting gains. Two DC-restored channels are typically needed in fader applications. See the EL4094 and EL4095 for suitable, monolithic video faders.

Layout and Dissipation Considerations

As with all high frequency circuits, the supplies should be bypassed with a $0.1\mu\text{F}$ ceramic capacitor very close to the supply pins, and a $4.7\mu\text{F}$ tantalum capacitor fairly close, to handle the high current surges. While a ground plane is recommended, the amplifier will work well with a "star" grounding scheme. The pin 3 ground is only used for the internal bias generator and the reference for the TTL compatible "HOLD" input.

As with all current feedback capacitors, all stray capacitance to the inverting inputs should be kept as low as possible, to avoid unwanted peaking at the output. This is especially true if the value of R_f has already been reduced to raise the bandwidth of the part, while tolerating some peaking. In this situation, additional capacitance on the inverting input can lead to an unstable amplifier.

Since there are three amplifiers all in one package, and each amplifier can sink or source typically more than 70mA, some care is needed to avoid excessive die temperatures. Sustained, DC currents, of over 30mA, are not recommended, due to the limited current handling capability of the metal traces inside the IC. Also, the short circuit protection can be tripped with currents as low as 45mA, which is seen as excessive distortion in the output waveform. As a quick rule of thumb, both the SOL and DIP 16 pin packages can dissipate about 1.4 watts at 25°C , and with $\pm 15\text{V}$ supplies and a worst case quiescent current of 32mA, yields 0.96 watts, before any load is driven.

Dissipation of the EL4390 can be reduced by lowering the supply voltage. Although some performance is degraded at lower supplies, as seen in the characteristic curves, it is often found to be a useful compromise. The bandwidth can be recovered, by reducing the value of R_f , and R_G as appropriate.

EL4390C

Triple 80 MHz Video Amplifier with DC Restore

EL4390C
Triple 80 MHz Video Amplifier with DC Restore

EL4390C

Triple 80 MHz Video Amplifier with DC Restore

General Disclaimer

Specifications contained in this data sheet are in effect as of the publication date shown. Elantec, Inc. reserves the right to make changes in the circuitry or specifications contained herein at any time without notice. Elantec, Inc. assumes no responsibility for the use of any circuits described herein and makes no representations that they are free from patent infringement.

élan^{te}c
HIGH PERFORMANCE ANALOG INTEGRATED CIRCUITS

Elantec, Inc.

1996 Tarob Court

Milpitas, CA 95035

Telephone: (408) 945-1323

(800) 333-6314

Fax: (408) 945-9305

European Office: 44-71-482-4596

WARNING — Life Support Policy

Elantec, Inc. products are not authorized for and should not be used within Life Support Systems without the specific written consent of Elantec, Inc. Life Support systems are equipment intended to support or sustain life and whose failure to perform when properly used in accordance with instructions provided can be reasonably expected to result in significant personal injury or death. Users contemplating application of Elantec, Inc. products in Life Support Systems are requested to contact Elantec, Inc. factory headquarters to establish suitable terms & conditions for these applications. Elantec, Inc.'s warranty is limited to replacement of defective components and does not cover injury to persons or property or other consequential damages.