




- △ USE PRO-CRIMPER II: 354940-1
- 2. USE INSTRUCTION SHEET 9766
- △ SPECIAL PACKAGING: BULK PACKAGE 25 PIECES
- △ SPECIAL PACKAGING: BULK PACKAGE 100 PIECES

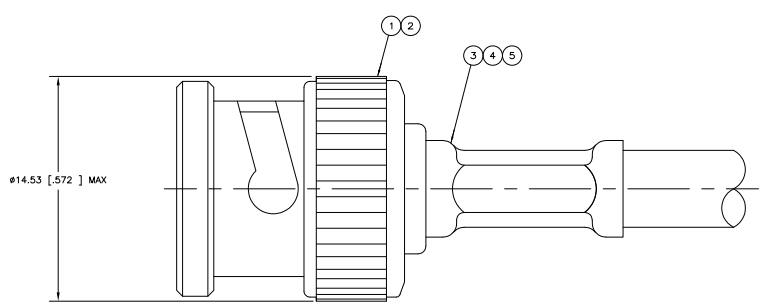

RECOMMENDED STRIP LENGTH  
SCALE 4:1



RECOMMENDED STRIP LENGTH  
(FOR 413589-5 AND 1-413589-2 ONLY)

DESCRIPTION	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
△ AT&T KS 19224 L2 CABLE AND JIS 1.5C-XV	1.07	.042	4.52	.178	852922-2	227194-2	222001-4	9-413658-2	413657-6	413653-2	9-413589-6										
OBSOLETE △ JIS 3C-2V	1.07	.042	5.41	.213	852922-1	-	-	9-221132-4	1-413657-0	413653-5	9-413589-5										
OBSOLETE △ RG-59 TYPE WITH .031 DIA CENTER CONTACT, BELDEN 9266, 9240 & 9259	1.07	.042	6.48	.255	852922-1	-	-	9-221132-1	413657-8	413653-1	9-413589-4										
OBSOLETE △ RG-179/U, 179A/U, 179B/U, 187/U & 187A/U	1.07	.042	4.52	.178	852922-2	227194-2	222001-4	9-413658-0	413657-6	413653-2	9-413589-3										
OBSOLETE △ AT&T 734A	1.07	.042	6.48	.255	852922-1	-	-	9-221132-3	413657-8	413653-4	9-413589-2										
OBSOLETE △ BELDEN 8218 AND JIS 2.5C-2V	1.07	.042	4.52	.178	852922-2	-	-	9-221132-6	413657-4	413653-2	9-413589-1										
OBSOLETE △ RG-59/U, 59A/U & 59B/U	1.07	.042	6.48	.255	852922-1	-	-	9-221132-1	413657-2	413653-1	9-413589-0										
△ OBSOLETE CUSTOM CABLE C/C=0.021, DIELECTRIC=0.122, JACKET=0.173	1.07	.042	5.41	.213	852922-1	-	-	9-221132-0	1-413657-0	413653-5	2-413589-1										
OBSOLETE △ MONTROSE 8466-3 AND 8299-3	1.07	.042	5.41	.213	852922-1	-	-	9-221132-0	1-413657-2	413653-5	1-413589-8										
△ OBSOLETE BELDEN 8218 AND JIS 2.5C-2V	1.07	.042	4.52	.178	852922-2	-	-	9-221132-6	413657-4	413653-2	1-413589-7										
△ BELDEN 8218 AND JIS 2.5C-2V	1.07	.042	4.52	.178	852922-2	-	-	9-221132-6	413657-4	413653-2	1-413589-6										
OBSOLETE △ JIS 2.5C-2V	1.07	.042	5.41	.213	852922-1	-	-	9-221132-0	413657-4	413653-2	1-413589-5										
OBSOLETE △ JIS 3C-2V	1.07	.042	6.48	.255	852922-1	-	-	9-221132-9	1-413657-0	413653-6	1-413589-4										
OBSOLETE △ AT&T KS 19224 L2 CABLE AND JIS 1.5C-XV	1.07	.042	4.52	.178	852922-2	227194-2	222001-4	9-413658-2	413657-6	413653-2	1-413589-3										
OBSOLETE △ BELDEN 8281, 9231 & AT&T 728 AND JIS 5C-2V	1.07	.042	8.23	.324	852922-3	-	-	9-221132-2	413657-8	413653-3	1-413589-2										
△ JIS 3C-2V	1.07	.042	5.41	.213	852922-1	-	-	9-221132-4	1-413657-0	413653-5	1-413589-1										
△ AT&T 734A C/C=0.016, DIELECTRIC=0.077, JACKET=0.130	1.07	.042	4.52	.178	852922-2	-	-	9-413658-2	413657-4	413653-2	1-413589-0										
RG-59 TYPE WITH .031 DIA CENTER CONTACT, BELDEN 9266, 9240 & 9259	1.07	.042	6.48	.255	852922-1	-	-	9-221132-1	413657-8	413653-1	413589-9										
RG-179/U, 179A/U, 179B/U, 187/U & 187A/U	1.07	.042	4.52	.178	852922-2	227194-2	222001-4	9-413658-0	413657-6	413653-2	413589-8										
AT&T 734A	1.07	.042	6.48	.255	852922-1	-	-	9-221132-3	413657-8	413653-4	413589-7										
TIMES RG-59/U, DOUBLE BRAID, 270 OD JACKET	1.07	.042	8.23	.324	852922-3	-	-	9-221132-2	413657-2	413653-1	413589-6										
BELDEN 8281, 9231 & AT&T 728 AND JIS 5C-2V	1.07	.042	8.23	.324	852922-3	-	-	9-221132-2	413657-8	413653-3	413589-5										
OBSOLETE △ AT&T KS 19224 L2 CABLE AND JIS 1.5C-XV	1.07	.042	4.52	.178	852922-2	227194-2	222001-4	9-413658-2	413657-6	413653-2	413589-4										
BELDEN 8218 AND JIS 2.5C-2V	1.07	.042	4.52	.178	852922-2	-	-	9-221132-6	413657-4	413653-2	413589-3										
RG-59/U, 59A/U & 59B/U	1.07	.042	6.48	.255	852922-1	-	-	9-221132-1	413657-2	413653-1	413589-2										
OBSOLETE △ BELDEN 88241	1.07	.042	6.48	.255	852922-1	-	-	9-413658-3	413657-2	413653-1	413589-1										

FOR USE WITH CABLE CONTACT CRIMP (SQUARE) FERRULE CRIMP (HEX) DIE SET (5) TUBING, PLASTIC QTY=1 (4) TUBING QTY=1 (3) FERRULE QTY=1 (2) CONTACT QTY=1 (1) PLUG ASSY QTY=1 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. TYS ELECTRONICS CORPORATION, HARRISBURG, PA 17105-3608. DATE: 12/14/07. DRAWING NO: 00779. CUSTOMER DRAWING: 413589. SIZE: 8.1 x 11.7. SHEET: 1 OF 1.