

General-purpose Operational Amplifiers /Comparators

TROPHY SERIES

Comparators




LM393DR/PWR/DGKR, LM2903DR/PWR/DGKR/VQDR/VQPWR
LM339DR/PWR, LM2901DR/PWR/VQDR/VQPWR

No.11094EBT03

Description



The Universal Standard family LM393 / LM339/ LM2903 / LM2901 monolithic ICs integrate two/four independent comparators on a single chip and feature high gain, low power consumption, and an operating voltage range from 2[V] to 36[V] (single power supply).

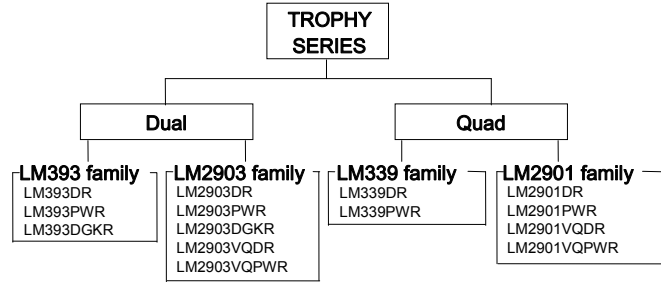

Features

- 1) Operating temperature range
Commercial Grade LM339/393 family : 0[°C] to + 70[°C]
Extended Industrial Grade LM2903/2901 family : -40[°C] to +125[°C]
- 2) Open collector output
- 3) Single / dual power supply compatible
- 4) Low supply current
0.8[mA] typ. (LM393/339/2903/2901 family)
- 5) Low input-bias current: 25[nA] typ.
- 6) Low input-offset voltage: 2[mV] typ.
- 7) Differential input voltage range equal to maximum rating
- 8) Low output saturation voltage
- 9) TTL,MOS,CMOS compatible output

Pin Assignment

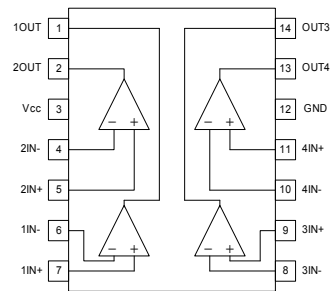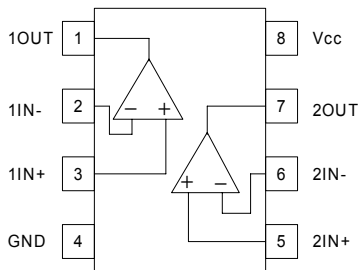

SOIC8

LM393DR
LM2903DR
LM2903VQDR

TSSOP8

LM393PWR
LM2903PWR
LM2903VQPWR

MSOP8/VSSOP8

LM393DGKR
LM2903DGKR

SOIC14

LM339DR
LM2901DR
LM2901VQDR

TSSOP14

LM339PWR
LM2901PWR
LM2901VQPWR

●Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Ratings				Unit
		LM393 family	LM339 family	LM2903 family	LM2901 family	
Supply Voltage	Vcc-GND	+36				V
Input Differential Voltage	Vid	±36				V
Common-mode Input	Vicm	-0.3 to +36				V
Operating Temperature	Topr	0 to +70		-40 to +125		°C
Storage Temperature Range	Tstg	-65 to +150				°C
Maximum Junction Temperature	Tj	+150				°C

●Electric Characteristics

OLM393/339 family(Unless otherwise specified, Vcc=+5[V])

Parameter	Symbol	Temperature range	Limits						Unit	condition	Fig. No.
			LM393 family			LM339 family					
			Min.	Typ.	Max.	Min.	Typ.	Max.			
Input Offset Voltage ^(*)	VIO	25°C	-	2	7	-	2	7	mV	Vcc=5 to 30[V],VO=1.4[V] VIC=VIC(min)	88
		Full range	-	-	9	-	-	9			
Input Offset Current ^(*)	IIO	25°C	-	5	50	-	5	50	nA	VO=1.4[V]	88
		Full range	-	-	250	-	-	150			
Input Bias Current ^(*)	IIB	25°C	-	25	250	-	25	250	nA	VO=1.4[V]	88
		Full range	-	-	400	-	-	400			
Common-mode Input Voltage Range	VICR	25°C	-	-	Vcc-1.5	-	-	Vcc-1.5	V	-	88
		Full range	-	-	Vcc-2.0	-	-	Vcc-2.0			
Large Signal Differential Voltage Amplification	AVD	25°C	25	200	-	25	200	-	V/mA	Vcc=15[V] VO=1.4 to 11.4[V], RL ≥ 15[kΩ],VRL=15[V]	88
High Level Output Current	IOH	25°C	-	0.1	-	-	0.1	-	nA	VID=1[V],VO=5[V]	89
		Full range	-	-	1	-	-	1	μA	VID=1[V],VO=30[V]	
Low Level Output Voltage	VOL	25°C	-	150	400	-	150	400	mV	VID=-1[V],IOL=4[mA]	89
		Full range	-	-	700	-	-	700			
Low Level Output Current	IOL	25°C	6	-	-	6	16	-	mA	VID=-1[V],VOL=1.5[V]	89
Supply Current	ICC	25°C	-	0.8	1	-	0.8	2	mA	RL=∞,Vcc=5V	89
		Full range	-	-	2.5	-	-	-		RL=∞,Vcc=30[V]	
Response Time	Tre	25°C	-	1.3	-	-	1.3	-	μs	RL=5.1[kΩ],VRL=5[V],CL=15pF VIN=100[mVp-p], overdrive=5[mV]	89
			-	0.3	-	-	0.3	-		RL=5.1[kΩ],VRL=5[V],CL=15pF VIN=TTL-Level input step Vref=1.4[V]	

(*) Absolute value

OLM2903/2901 family (Unless otherwise specified, Vcc=+5[V])

Parameter	Symbol	Temperature range	Limits						Unit	Condition	Fig. No	
			LM2903 family			LM2901 family						
			Min.	Typ.	Max.	Min.	Typ.	Max.				
Input Offset Voltage ^(*)2)	VIO	25°C	—	2	7	—	2	7	mV	Vcc=5 to MAX ^(*)3) , VO=1.4[V] VIC=VIC (min)	88	
		Full range	—	—	15	—	—	15				
Input Offset Current ^(*)2)	IIO	25°C	—	5	50	—	5	50	nA	VO=1.4[V]	88	
		Full range	—	—	200	—	—	200				
Input Bias Current ^(*)2)	IIB	25°C	—	25	250	—	25	250	nA	VO=1.4[V]	88	
		Full range	—	—	500	—	—	500				
Common-mode Input Voltage Range	VICR	25°C	—	—	Vcc-1.5	—	—	Vcc-1.5	V	—	88	
		Full range	—	—	Vcc-2.0	—	—	Vcc-2.0				
Large Signal Differential Voltage Amplification	AVD	25°C	25	100	—	25	100	—	V/mV	Vcc=15[V], VOUT=1.4 to 11.4[V], RL ≥ 15[kΩ], VRL=15[V]	88	
High Level Output Current	IOH	25°C	—	0.1	—	—	0.1	—	nA	VID=1[V], VOH=5[V]	89	
		Full range	—	—	1	—	—	1	μA	VID=1[V], VOH=MAX		
Low Level Output Voltage	LM2901 ^(*)3)	VOL	25°C	—	150	400	—	150	500	mV	VIN(-)=1[V], VIN(+)=0[V] ISINK ≤ 4[mA]	89
	LM2901V ^(*)3)		25°C	—	150	400	—	150	400			
	Full range		—	—	700	—	—	700				
Low Level Output Current	IOL	25°C	6	16	—	6	16	—	mA	VID=-1[V], VOL=1.5[V]	89	
Supply Current	ICC	25°C	—	0.8	2	—	0.8	2	mA	RL=∞, Vcc=5V	89	
			—	1	2.5	—	1	2.5		RL=∞, Vcc=MAX ^(*)7)		
Response Time	Tre	25°C	—	1.3	—	—	1.3	—	μs	RL=5.1[Ω], VRL=5[V], CL=15pF VIN=100[mVp-p], Overdrive=5[mV]	89	
			—	0.3	—	—	0.3	—		RL=5.1[kΩ], VRL=5[V], CL=15pF VIN=TTL-Level input step Vref=1.4[V]		

(*)2) Absolute value

(*)3) Supply Voltage Maximum Value LM2901DR, LM2901PWR MAX=30[V], LM2901VQDR, LM2901VQPWR MAX=32[V]

● Reference Data LM393 family

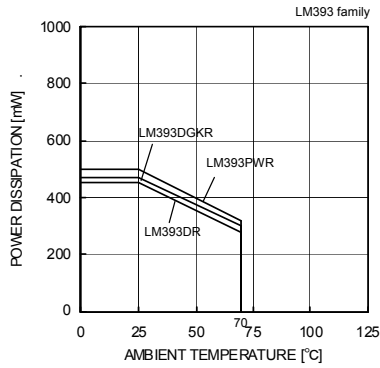


Fig. 1
Derating Curve

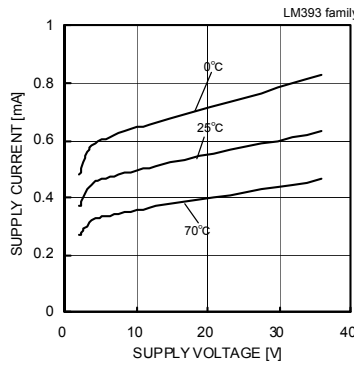


Fig. 2
Supply Current - Supply Voltage

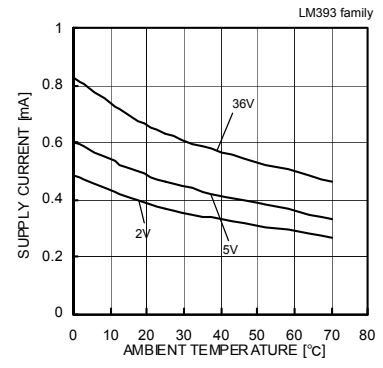


Fig. 3
Supply Current - Ambient Temperature

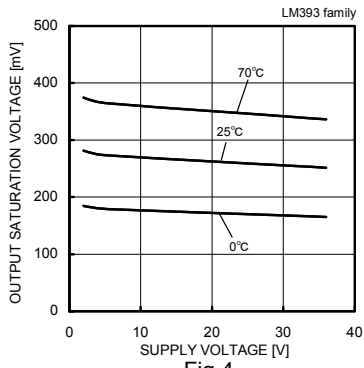


Fig. 4
Output Saturation Voltage - Supply Voltage
(IOL=4[mA])

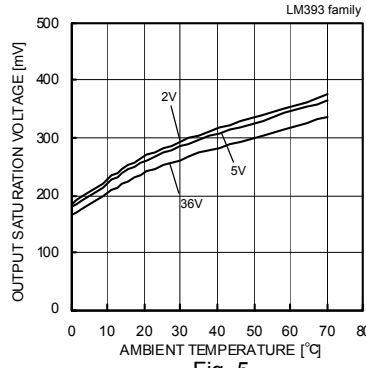


Fig. 5
Output Saturation Voltage - Ambient Temperature
(IOL=4[mA])

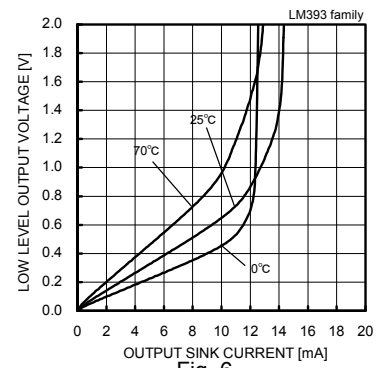


Fig. 6
Low Level Output Voltage - Output Sink Current
(VCC=5[V])

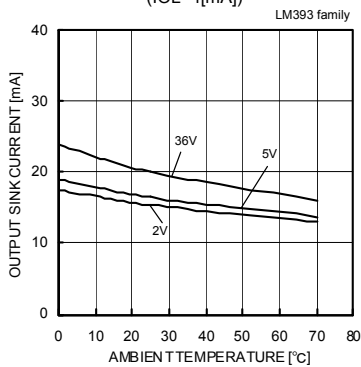


Fig. 7
Output Sink Current - Ambient Temperature
(VOUT=1.5[V])

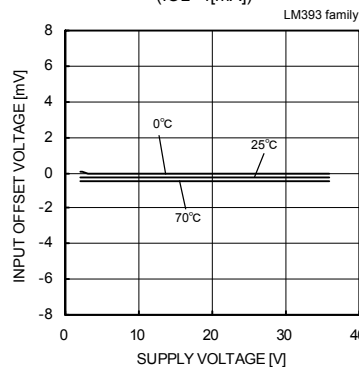


Fig. 8
Input Offset Voltage - Supply Voltage

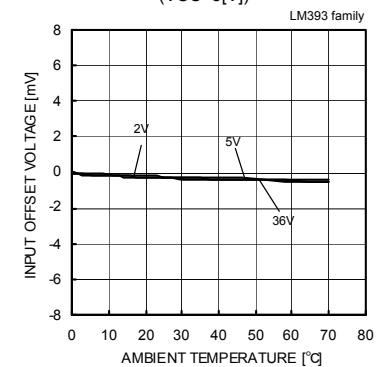


Fig. 9
Input Offset Voltage - Ambient Temperature

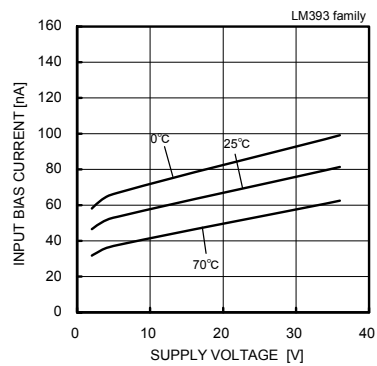


Fig. 10
Input Bias Current - Supply Voltage

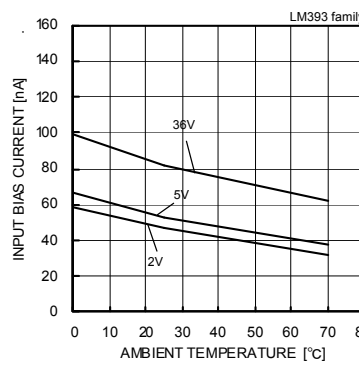


Fig. 11
Input Bias Current - Ambient Temperature

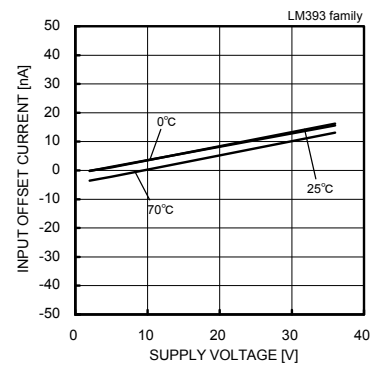


Fig. 12
Input Offset Current - Supply Voltage

(*)The data above is ability value of sample, it is not guaranteed. LM393family:0[°C]~+70[°C]

● Reference Data LM393 family

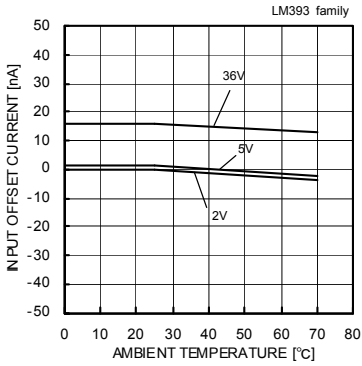


Fig. 13

Input Offset Current – Ambient Temperature

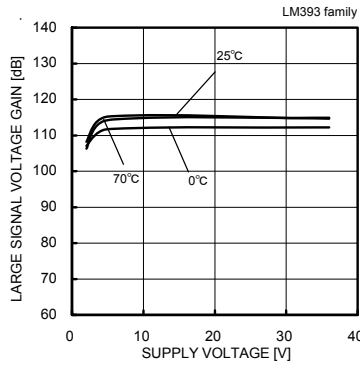


Fig. 14

Large Signal Voltage Gain – Supply Voltage

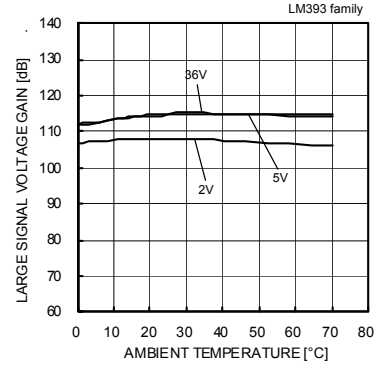


Fig. 15

Large Signal Voltage Gain – Ambient Temperature

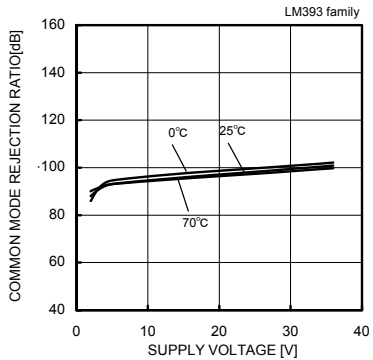


Fig. 16

Common Mode Rejection Ratio – Supply Voltage

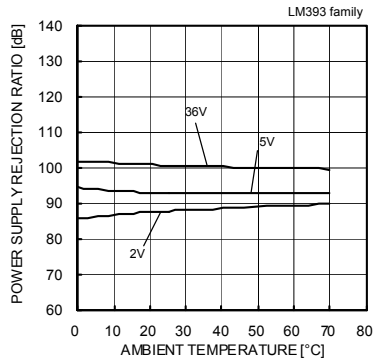


Fig. 17

Common Mode Rejection Ratio – Ambient Temperature

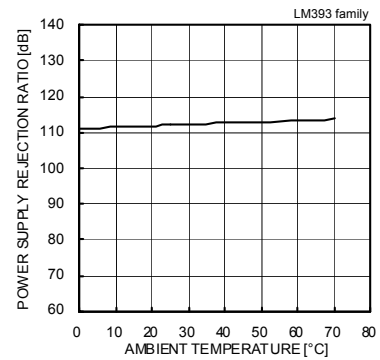


Fig. 18

Power Supply Rejection Ratio – Ambient Temperature

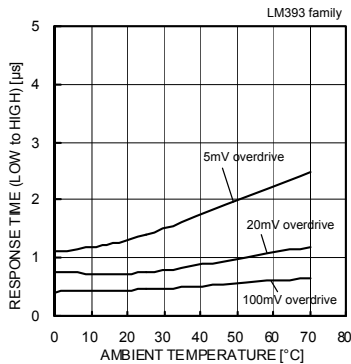


Fig. 19

Response Time (Low to High)
 – Ambient Temperature
 (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

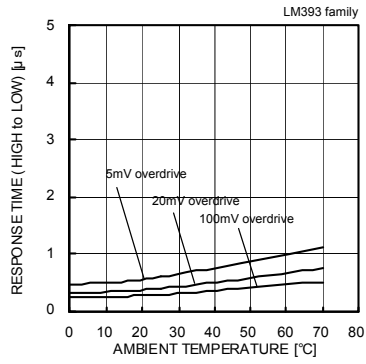


Fig. 20

Response Time (High to Low)
 – Ambient Temperature
 (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

(*)The data above is ability value of sample, it is not guaranteed. LM393family:0[°C]~+70[°C]

● Reference Data LM339 family

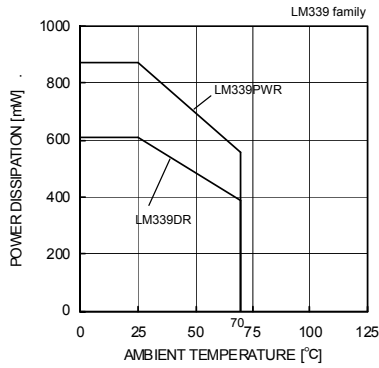


Fig. 21

Derating Curve

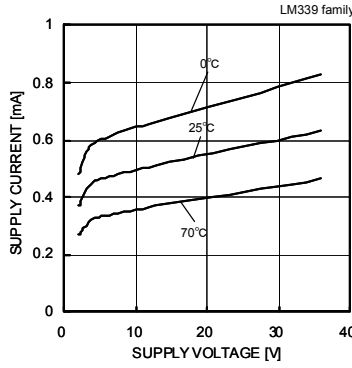


Fig. 22

Supply Current - Supply Voltage

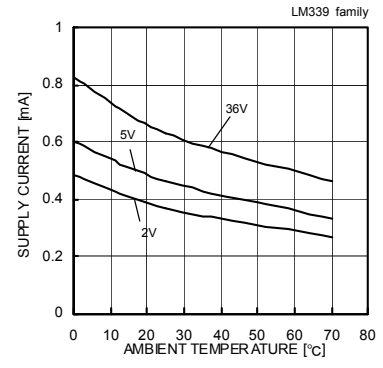


Fig. 23

Supply Current - Ambient Temperature

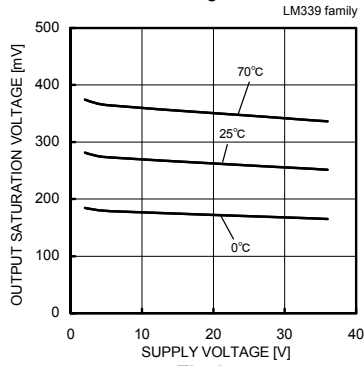


Fig. 24

Output Saturation Voltage - Supply Voltage (IOL=4[mA])

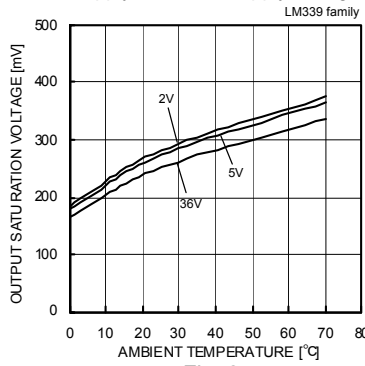


Fig. 25

Output Saturation Voltage - Ambient Temperature (IOL=4[mA])

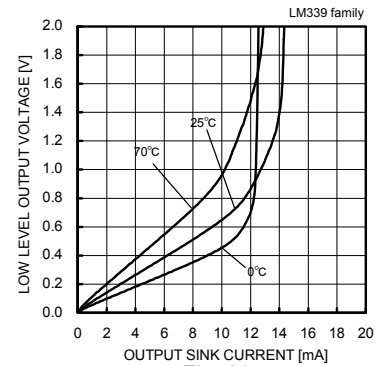


Fig. 26

Low Level Output Voltage - Output Sink Current (VCC=5[V])

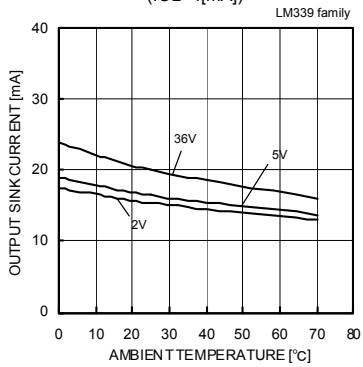


Fig. 27

Output Sink Current - Ambient Temperature (VOUT=1.5[V])

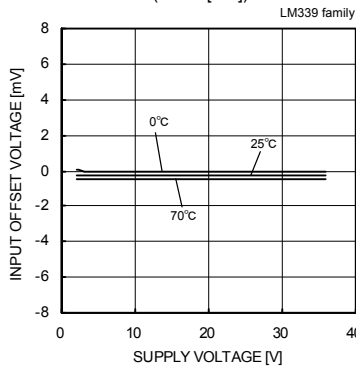


Fig. 28

Input Offset Voltage - Supply Voltage

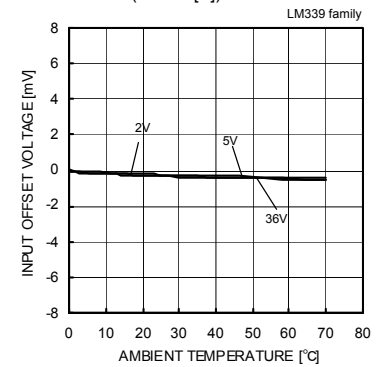


Fig. 29

Input Offset Voltage - Ambient Temperature

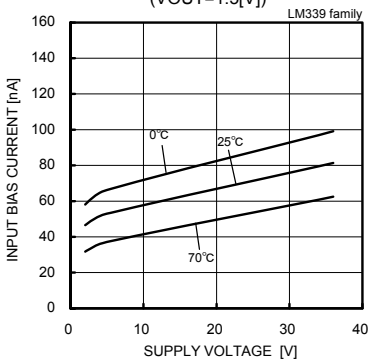


Fig. 30

Input Bias Current - Supply Voltage

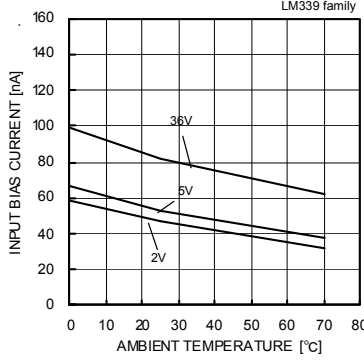


Fig. 31

Input Bias Current - Ambient Temperature

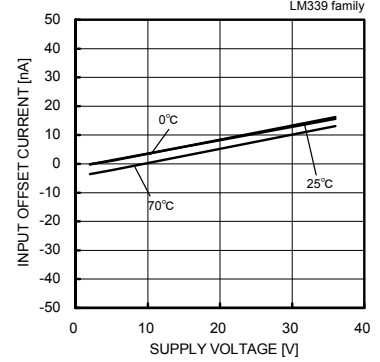


Fig. 32

Input Offset Current - Supply Voltage

(*)The data above is ability value of sample, it is not guaranteed. LM339family:0[°C]~+70[°C]

●Reference Data LM339 family

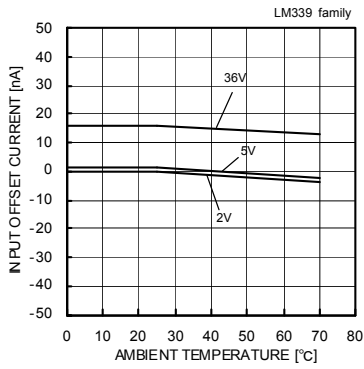


Fig. 33
 Input Offset Current
 – Ambient Temperature

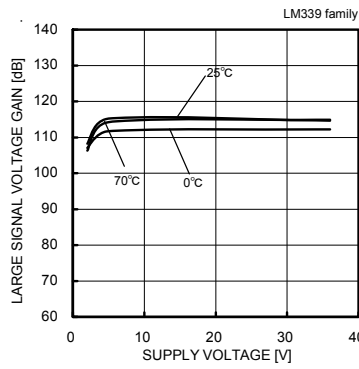


Fig. 34
 Large Signal Voltage Gain
 – Supply Voltage

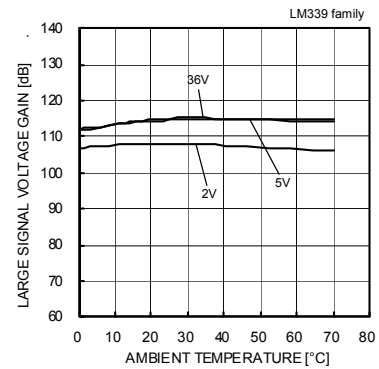


Fig. 35
 Large Signal Voltage Gain
 – Ambient Temperature

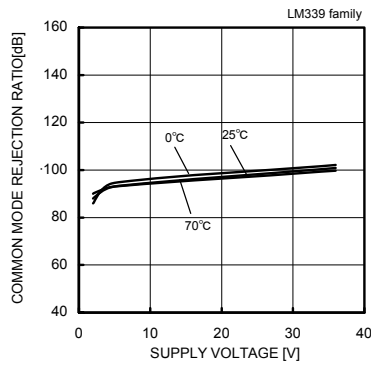


Fig. 36
 Common Mode Rejection Ratio
 – Supply Voltage

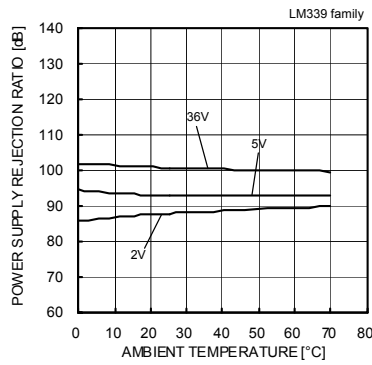


Fig. 37
 Common Mode Rejection Ratio
 – Ambient Temperature

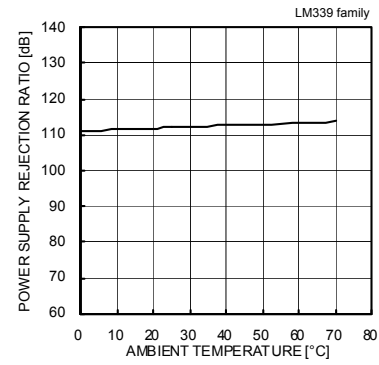


Fig. 38
 Power Supply Rejection Ratio
 – Ambient Temperature

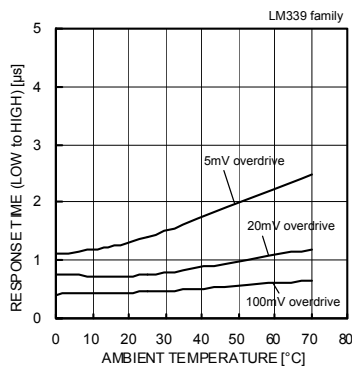


Fig. 39
 Response Time (Low to High)
 – Ambient Temperature
 (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

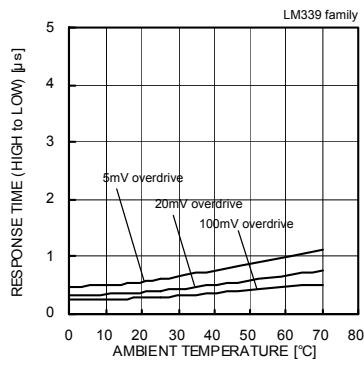


Fig. 40
 Response Time (High to Low)
 – Ambient Temperature
 (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

(*)The data above is ability value of sample, it is not guaranteed. BA10393F: -40[°C]~+70[°C]

●Reference Data LM2903 family

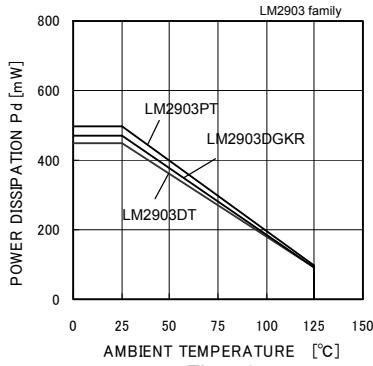


Fig. 41
Derating Curve

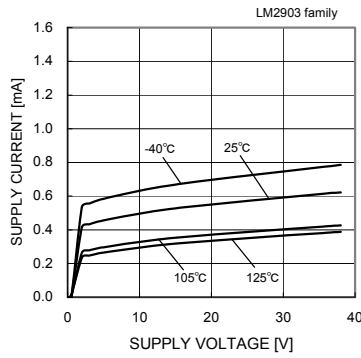


Fig. 42
Supply Current - Supply Voltage

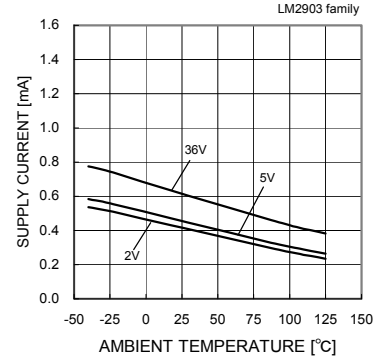


Fig. 43
Supply Current - Ambient Temperature

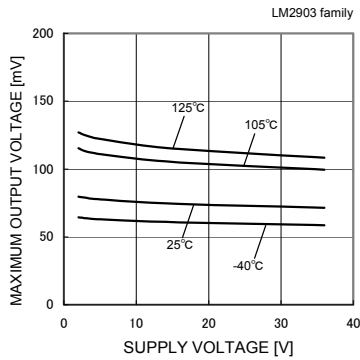


Fig. 44
Output Saturation Voltage - Supply Voltage
(IOL=4[mA])

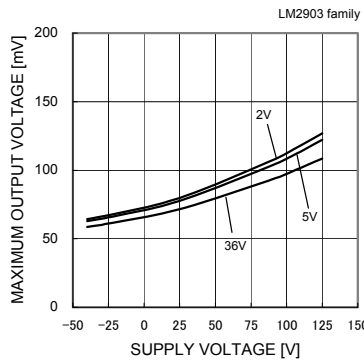


Fig. 45
Output Saturation Voltage - Ambient Temperature
(IOL=4[mA])

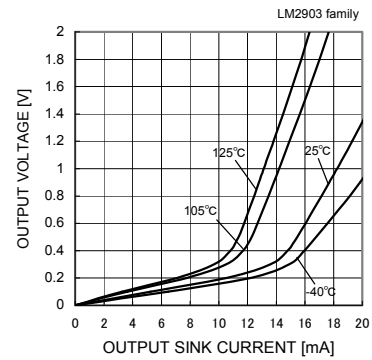


Fig. 46
Low Level Output Voltage - Output Sink Current
(VCC=5[V])

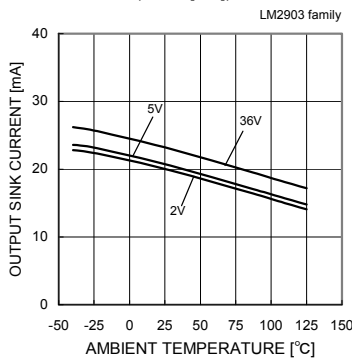


Fig. 47
Output Sink Current - Ambient Temperature
(VOUT=1.5[V])

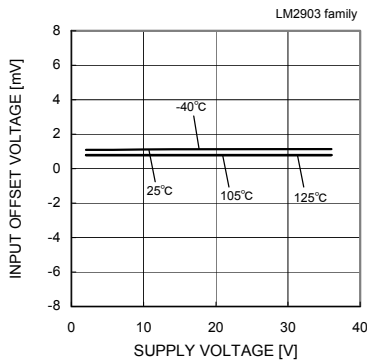


Fig. 48
Input Offset Voltage - Supply Voltage

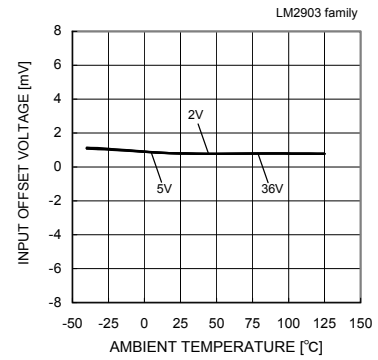


Fig. 49
Input Offset Voltage - Ambient Temperature

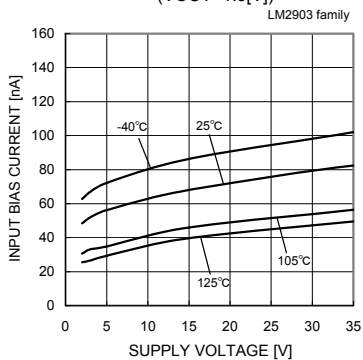


Fig. 50
Input Bias Current - Supply Voltage

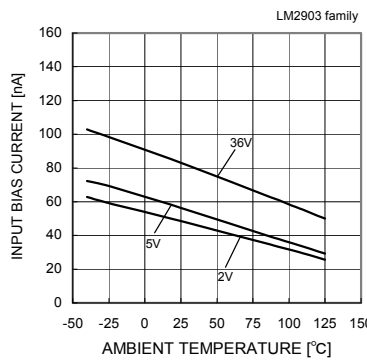


Fig. 51
Input Bias Current - Ambient Temperature

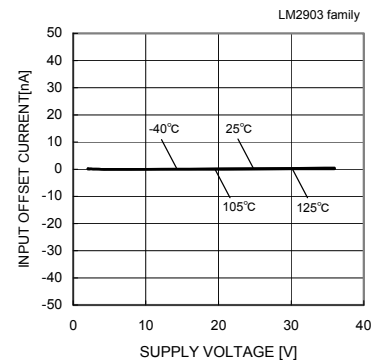


Fig. 52
Input Offset Current - Supply Voltage

(*)The data above is ability value of sample, it is not guaranteed. LM2903family: -40[°C]~+125[°C]

●Reference Data LM2903 family

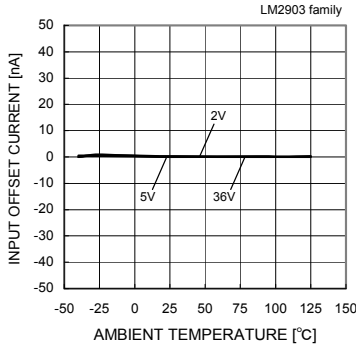


Fig. 53

Input Offset Current – Ambient Temperature

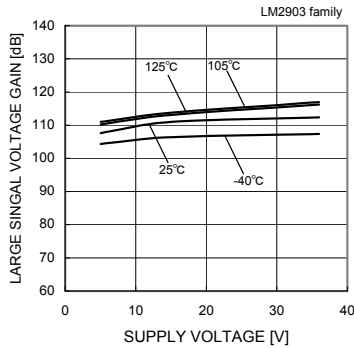


Fig. 54

Large Signal Voltage Gain – Supply Voltage

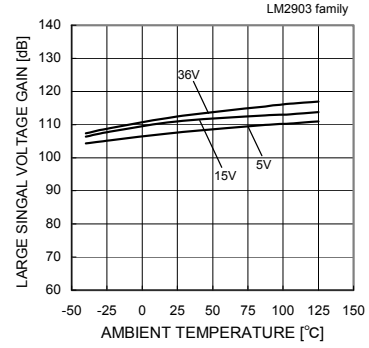


Fig. 55

Large Signal Voltage Gain – Ambient Temperature

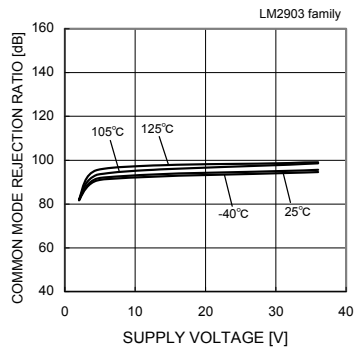


Fig. 56

Common Mode Rejection Ratio – Supply Voltage

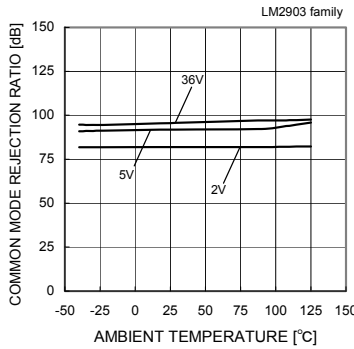


Fig. 57

Common Mode Rejection Ratio – Ambient Temperature

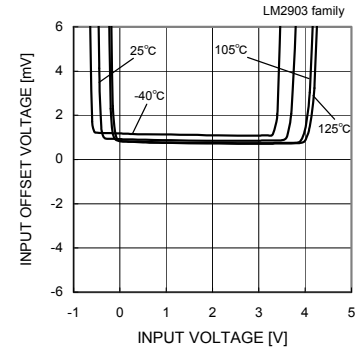


Fig. 58

Input Offset Voltage – Input Voltage (VCC=5V)

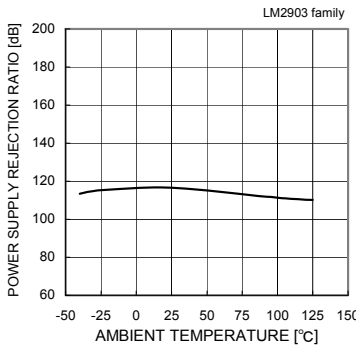


Fig. 59

Power Supply Rejection Ratio – Ambient Temperature

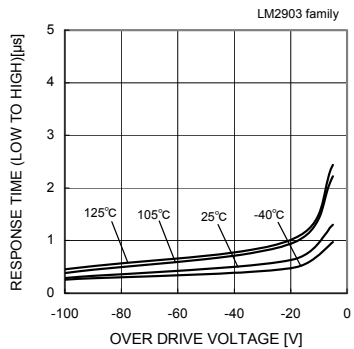


Fig. 60

Response Time (Low to High) – Over Drive Voltage (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

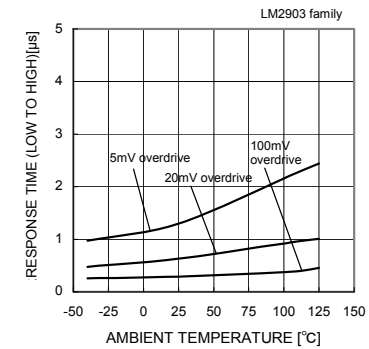


Fig. 61

Response Time (Low to High) – Ambient Temperature (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

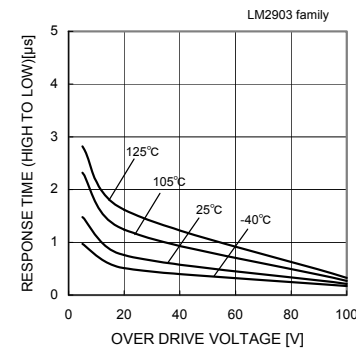


Fig. 62

Response Time (High to Low) – Over Drive Voltage (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

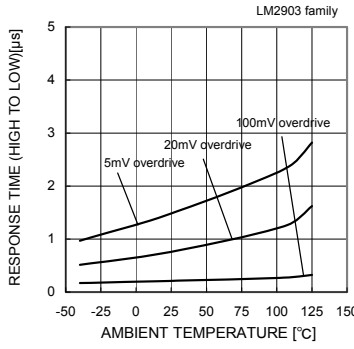


Fig. 63

Response Time (High to Low) – Ambient Temperature (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

(*)The data above is ability value of sample, it is not guaranteed. LM2903family: -40[°C] ~ +125[°C]

● Reference Data LM2901 family

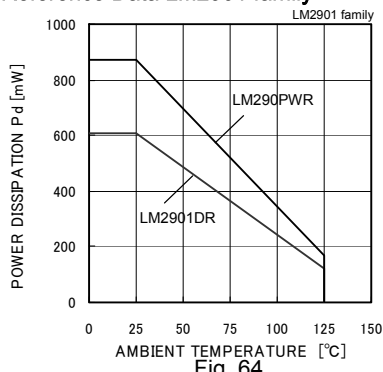


Fig. 64
Derating Curve

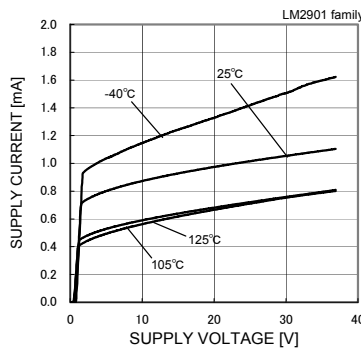


Fig. 65
Supply Current - Supply Voltage

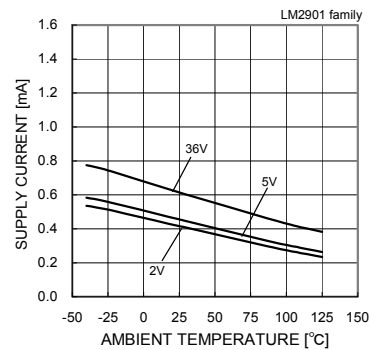


Fig. 66
Supply Current - Ambient Temperature

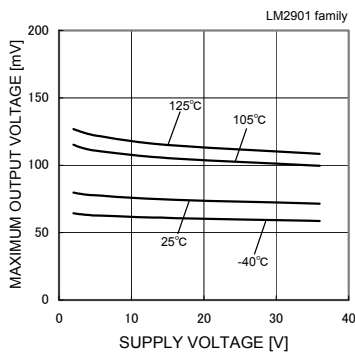


Fig. 67
Output Saturation Voltage
- Supply Voltage
(IOL=4[mA])

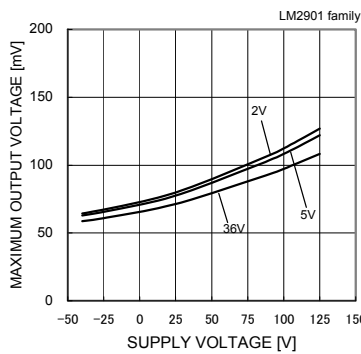


Fig. 68
Output Saturation Voltage
- Ambient Temperature
(IOL=4[mA])

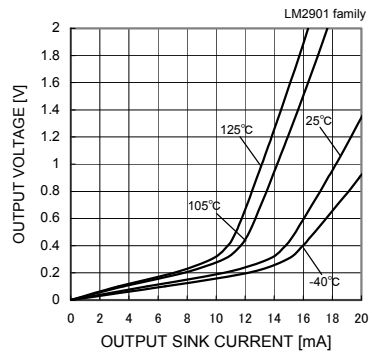


Fig. 69
Low Level Output Voltage
- Output Sink Current
(VCC=5[V])

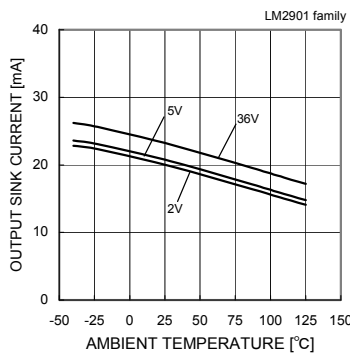


Fig. 70
Output Sink Current - Ambient Temperature
(VOUT=1.5[V])

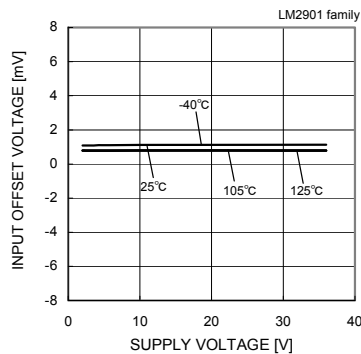


Fig. 71
Input Offset Voltage - Supply Voltage

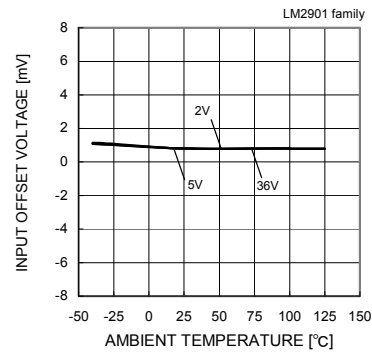


Fig. 72
Input Offset Voltage - Ambient Temperature

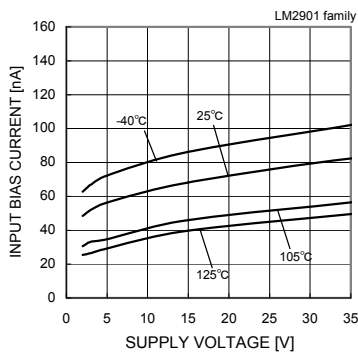


Fig. 73
Input Bias Current - Supply Voltage

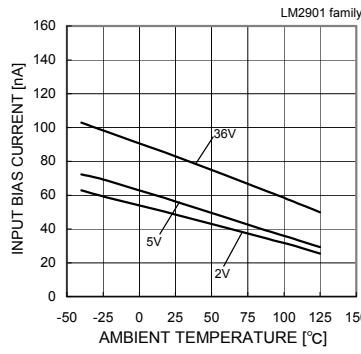


Fig. 74
Input Bias Current - Ambient Temperature

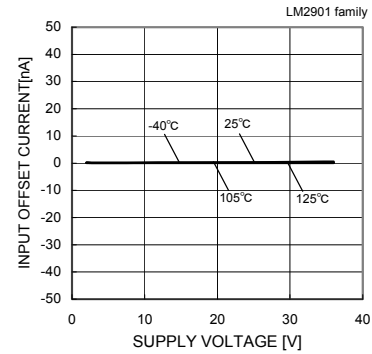


Fig. 75
Input Offset Current - Supply Voltage

(*The data above is ability value of sample, it is not guaranteed. LM2901family: -40[°C]~+125[°C])

●Reference Data LM2901 family

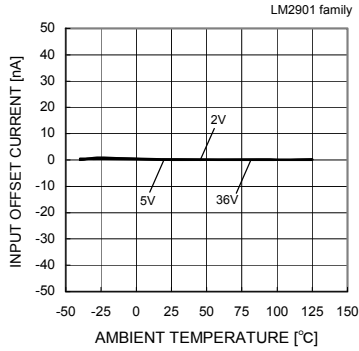


Fig. 76

Input Offset Current – Ambient Temperature

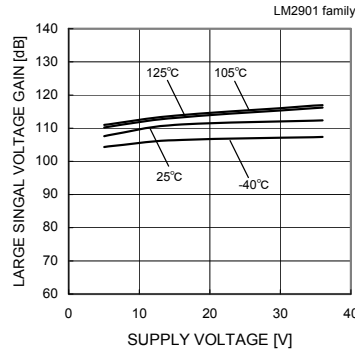


Fig. 77

Large Signal Voltage Gain – Supply Voltage

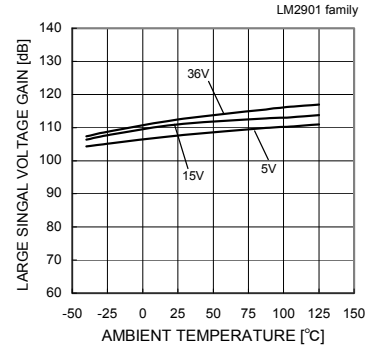


Fig. 78

Large Signal Voltage Gain – Ambient Temperature

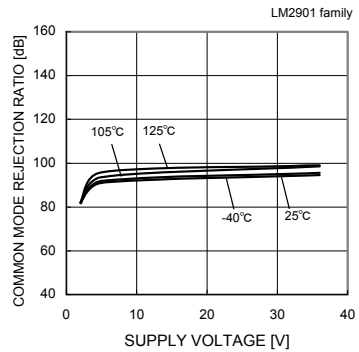


Fig. 79

Common Mode Rejection Ratio – Supply Voltage

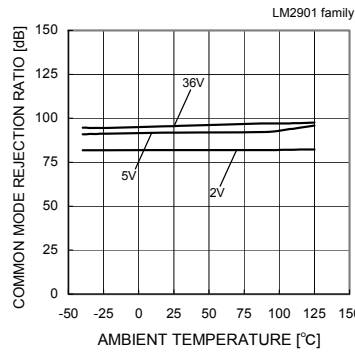


Fig. 80

Common Mode Rejection Ratio – Ambient Temperature

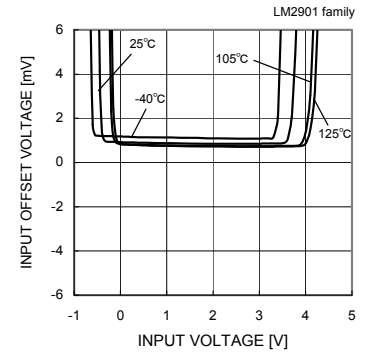


Fig. 81

Input Offset Voltage – Input Voltage (VCC=5V)

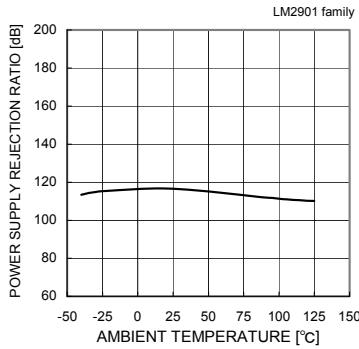


Fig. 82

Power Supply Rejection Ratio – Ambient Temperature

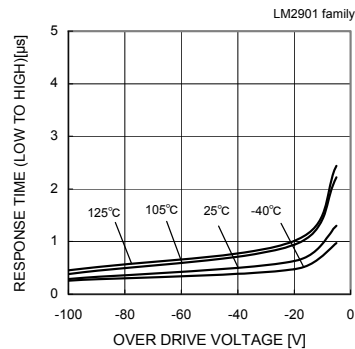


Fig. 83

Response Time (Low to High) – Over Drive Voltage (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

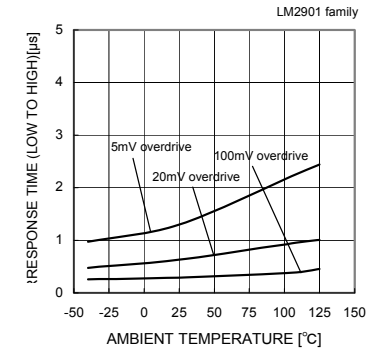


Fig. 84

Response Time (Low to High) – Ambient Temperature (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

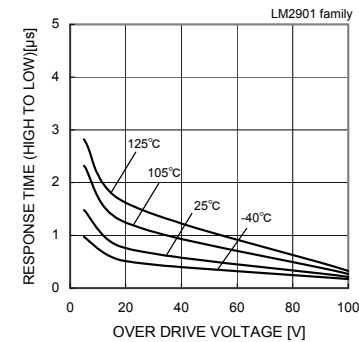


Fig. 85

Response Time (High to Low) – Over Drive Voltage (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

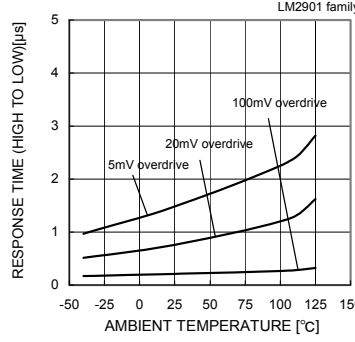


Fig. 86

Response Time (High to Low) – Ambient Temperature (VCC=5[V], VRL=5[V], RL=5.1[kΩ])

(*)The data above is ability value of sample, it is not guaranteed. LM901family:-40[°C]~+125[°C]

●Circuit Diagram

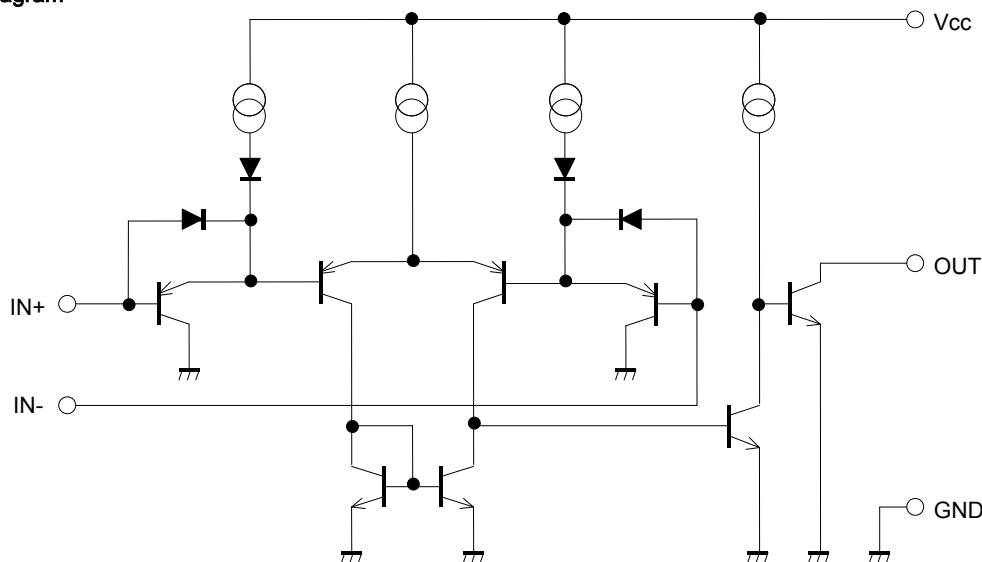


Fig.87 Circuit Diagram (each Comparator)

●Measurement circuit 1 NULL Method measurement condition

Vcc,GND,EK,VICR Unit : [V]

Parameter	VF	S1	S2	S3	LM393/LM339 family				LM2903/LM2901 family				Calculation
					Vcc	GND	EK	VICR	Vcc	GND	EK	VICR	
Input Offset Voltage	VF1	ON	ON	ON	5 to 30	0	-1.4	0	5 to 30	0	-1.4	0	1
Input Offset Current	VF2	OFF	OFF	ON	5	0	-1.4	0	5	0	-1.4	0	2
Input Bias Current	VF3	OFF	ON	ON	5	0	-1.4	0	5	0	-1.4	0	3
	VF4	ON	OFF		5	0	-1.4	0	5	0	-1.4	0	
Large Signal Voltage Gain	VF5	ON	ON	ON	15	0	-1.4	0	15	0	-1.4	0	4
	VF6				15	0	-11.4	0	15	0	-11.4	0	

— Calculation —

1.Input offset voltage (VIO)

$$V_{io} = \frac{|VF1|}{1 + R_f/R_s} \text{ [V]}$$

2.Input offset current (IIO)

$$I_{io} = \frac{|VF2 - VF1|}{R_i(1 + R_f/R_s)} \text{ [A]}$$

3.Input bias current (Iib)

$$I_b = \frac{|VF4 - VF3|}{2 \times R_i(1 + R_f/R_s)} \text{ [A]}$$

4.Large signal differential voltage gain (AVD)

$$AV = 20 \times \text{Log} \frac{10 \times (1 + R_f/R_s)}{|VF6 - VF5|} \text{ [dB]}$$

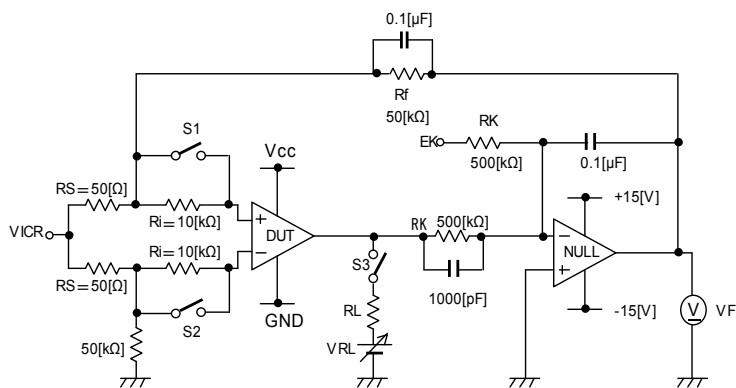


Fig.88 Measurement Circuit1 (each Comparator)

● Measurement Circuit2 Switch Condition

SW No.		SW 1	SW 2	SW 3	SW 4	SW 5	SW 6	SW 7
Supply Current	—	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Low Level Output Current	VOL=1.5[V]	OFF	ON	ON	OFF	ON	ON	OFF
Low Level Output Current	IOL=4[mA]	OFF	ON	ON	OFF	OFF	OFF	ON
High Level Output Current	VOH=36[V]	OFF	ON	ON	OFF	OFF	OFF	ON
Response Time	RL=5.1[kΩ]	ON	OFF	ON	ON	OFF	ON	OFF
	VRL=5[V]							

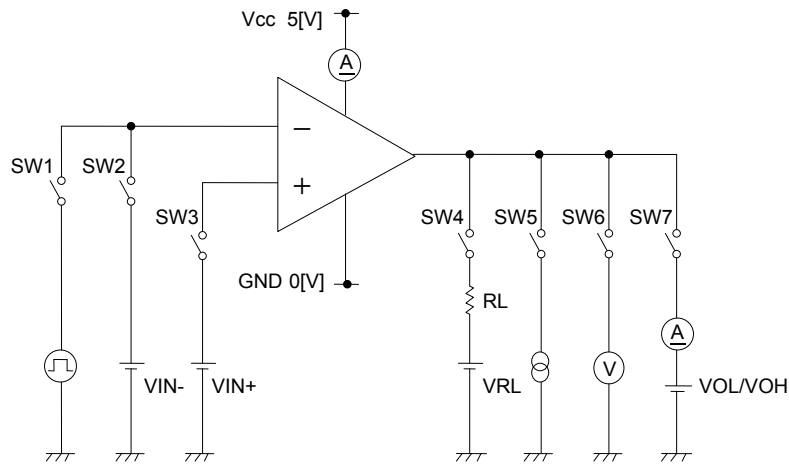


Fig.89 Measurement Circuit2 (each channel)

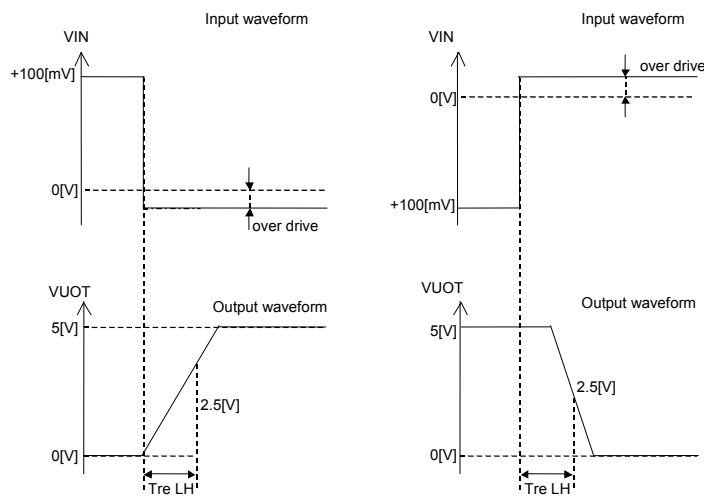


Fig.90 Response Time

● Description of Electrical Characteristics

Described below are descriptions of the relevant electrical terms.

Please note that item names, symbols, and their meanings may differ from those on another manufacturer's documents.

1. Absolute maximum ratings

The absolute maximum ratings are values that should never be exceeded, since doing so may result in deterioration of electrical characteristics or damage to the part itself as well as peripheral components.

1.1 Power supply voltage (V_{CC}/GND)

Expresses the maximum voltage that can be supplied between the positive and negative power supply terminals without causing deterioration of the electrical characteristics or destruction of the internal circuitry.

1.2 Differential input voltage (VID)

Indicates the maximum voltage that can be supplied between the non-inverting and inverting terminals without damaging the IC.

1.3 Input common-mode voltage range (VICR)

Signifies the maximum voltage that can be supplied to non-inverting and inverting terminals without causing deterioration of the electrical characteristics or damage to the IC itself. Normal operation is not guaranteed within the input common-mode voltage range of the maximum ratings – use within the input common-mode voltage range of the electric characteristics instead.

1.4 Operating temperature range and storage temperature range (Topr, Tstg)

The operating temperature range indicates the temperature range within which the IC can operate. The higher the ambient temperature, the lower the power consumption of the IC. The storage temperature range denotes the range of temperatures the IC can be stored under without causing excessive deterioration of the electrical characteristics.

1.5 Power dissipation (Pd)

Indicates the power that can be consumed by a particular mounted board at ambient temperature (25°C). For packaged products, Pd is determined by maximum junction temperature and the thermal resistance.

2. Electrical characteristics

2.1 Input offset voltage (VIO)

Signifies the voltage difference between the non-inverting and inverting terminals. It can be thought of as the input voltage difference required for setting the output voltage to 0V.

2.2 Input offset current (IIO)

Indicates the difference of the input bias current between the non-inverting and inverting terminals.

2.3 Input bias current (IIB)

Denotes the current that flows into or out of the input terminal, it is defined by the average of the input bias current at the non-inverting terminal and the input bias current at the inverting terminal.

2.4 Input common-mode voltage range (VICR)

Indicates the input voltage range under which the IC operates normally.

2.5 Large signal differential voltage gain (AVD)

The amplifying rate (gain) of the output voltage against the voltage difference between the non-inverting and inverting terminals, it is (normally) the amplifying rate (gain) with respect to DC voltage.
 $AVD = (\text{output voltage fluctuation}) / (\text{input offset fluctuation})$

2.6 Supply current (ICC)

Indicates the current of the IC itself that flows under specific conditions and during no-load steady state.

2.7 Low level output current (IOL)

Denotes the maximum current that can be output under specific output conditions.

2.8 Low level output voltage (VOL)

Signifies the voltage range that can be output under specific output conditions.

2.9 High level output current (IOH)

Indicates the current that flows into the IC under specific input and output conditions.

2.10 Response time (tre)

The interval between the application of input and output conditions.


2.11 Common-mode rejection ratio (CMRR)

Denotes the ratio of fluctuation of the input offset voltage when the in-phase input voltage is changed (DC fluctuation).
 $CMRR = (\text{change of input common-mode voltage}) / (\text{input offset fluctuation})$

2.12 Power supply rejection ratio (PSRR)


Signifies the ratio of fluctuation of the input offset voltage when the supply voltage is changed (DC fluctuation).
 $PSRR = (\text{change in power supply voltage}) / (\text{input offset fluctuation})$

● Derating Curves

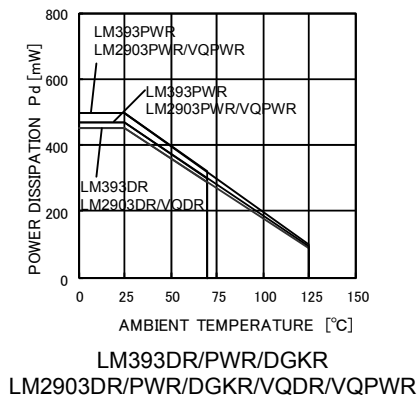

Power Dissipation		
Package	Pd[W]	θ_{ja} [°C/W]
SOIC8 (*8)	450	3.6
TSSOP8 (*6)	500	4.0
MSOP8/VSSOP8 (*7)	470	3.76

$\theta_{ja} = (T_j - T_a) / Pd [°C/W]$

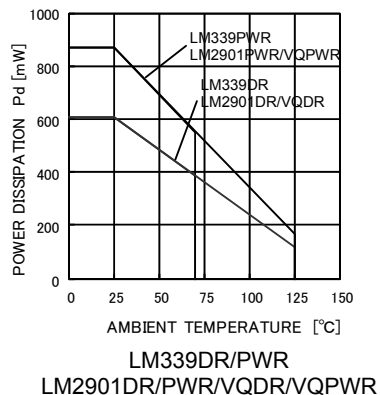

Power Dissipation		
Package	Pd[W]	θ_{ja} [°C/W]
SOIC14	610	4.9
TSSOP14	870	7.0

$\theta_{ja} = (T_j - T_a) / Pd [°C/W]$

Fig.91 Derating Curves

● Precautions

- 1) Unused circuits
When there are unused circuits it is recommended that they be connected as in Fig.92, setting the non-inverting input terminal to a potential within the in-phase input voltage range (VICR).
- 2) Input terminal voltage
Applying GND + 36V to the input terminal is possible without causing deterioration of the electrical characteristics or destruction, irrespective of the supply voltage. However, this does not ensure normal circuit operation.
Please note that the circuit operates normally only when the input voltage is within the common mode input voltage range of the electric characteristics.
- 3) Power supply (single / dual)
The op-amp operates when the specified voltage supplied is between Vcc and GND. Therefore, the single supply op-amp can be used as a dual supply op-amp as well.
- 4) Power dissipation Pd
Using the unit in excess of the rated power dissipation may cause deterioration in electrical characteristics due to a rise in chip temperature, including reduced current capability. Therefore, please take into consideration the power dissipation (Pd) under actual operating conditions and apply a sufficient margin in thermal design. Refer to the thermal derating curves for more information.
- 5) Short-circuit between pins and erroneous mounting
Incorrect mounting may damage the IC. In addition, the presence of foreign particles between the outputs, the output and the power supply, or the output and GND may result in IC destruction.
- 6) Terminal short-circuits
When the output and Vcc terminals are shorted, excessive output current may flow, resulting in undue heat generation and, subsequently, destruction.
- 7) Operation in a strong electromagnetic field
Operation in a strong electromagnetic field may cause malfunctions.
- 8) Radiation
This IC is not designed to withstand radiation.
- 9) IC handling
Applying mechanical stress to the IC by deflecting or bending the board may cause fluctuations in the electrical characteristics due to piezoelectric (piezo) effects.
- 10) Board inspection
Connecting a capacitor to a pin with low impedance may stress the IC. Therefore, discharging the capacitor after every process is recommended. In addition, when attaching and detaching the jig during the inspection phase, ensure that the power is turned OFF before inspection and removal. Furthermore, please take measures against ESD in the assembly process as well as during transportation and storage.




Fig.92 Disable circuit example

● Ordering part number

L	M	2	9	0	3
---	---	---	---	---	---

Family name

LM393
 LM339
 LM2901
 LM2903

V	Q
---	---

Operating Voltage

VQ : Tested to 32V
 None : Tested to 30V

D

Package type


D : SOIC
 PW : TSSOP
 DGK : MSOP/VSSOP

R

Packaging and forming specification


R: Embossed tape and reel

SOIC8

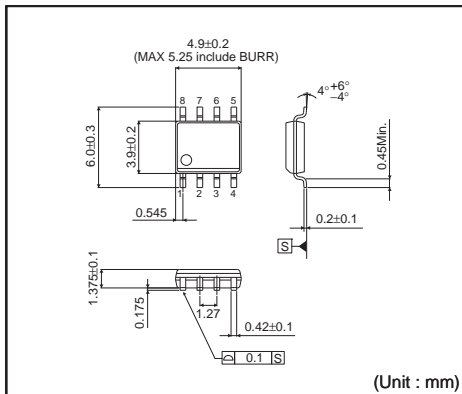


<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

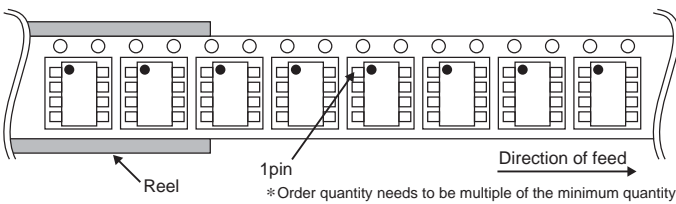


SOIC14

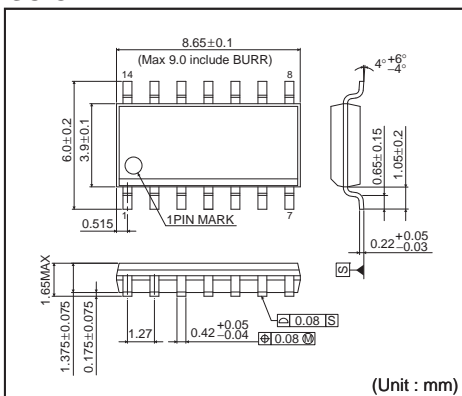


<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

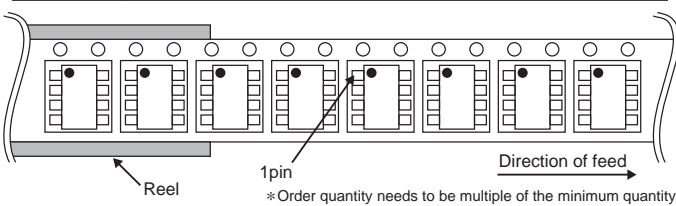


TSSOP8

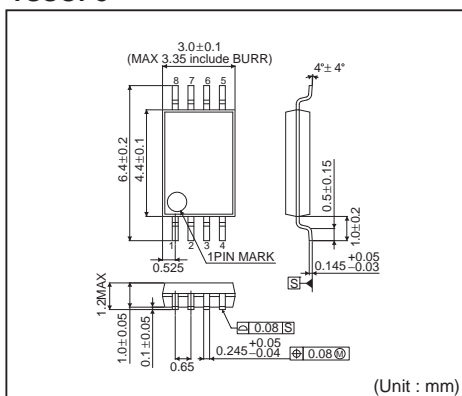


<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

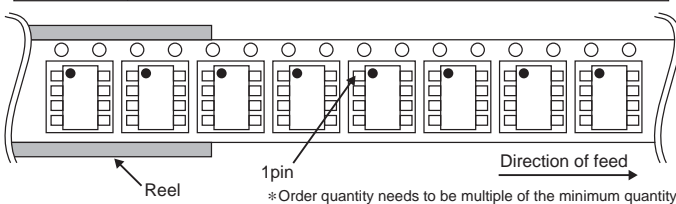


TSSOP14

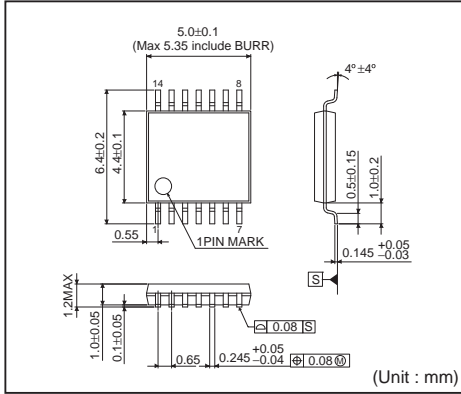


<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

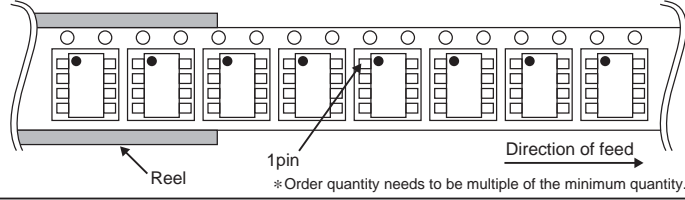


MSOP / VSSOP8

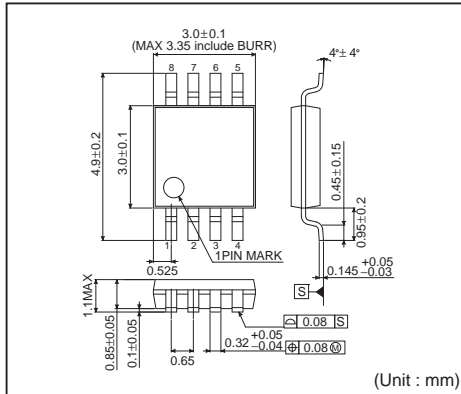

<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

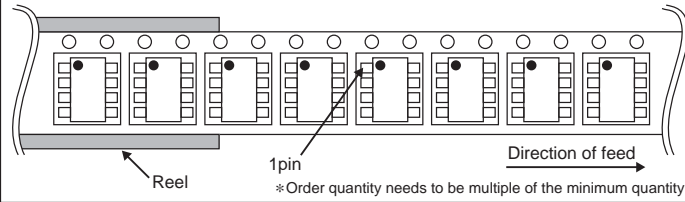

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>