

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		F	DESCRIPTION	DATE	BY	APP'D
AJ	16	B	REVISED PER ECO 07-002853	21MAR2007	DW	JL

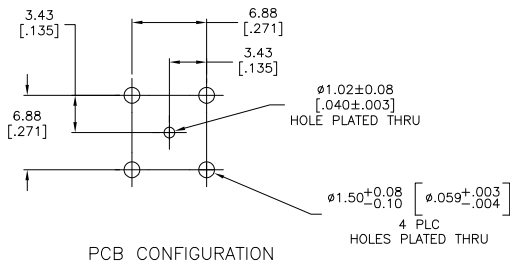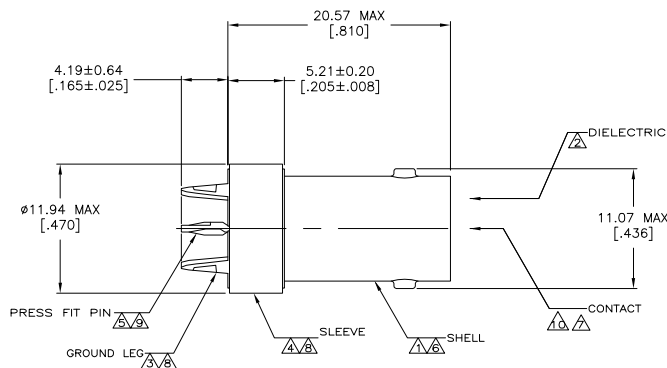

- 1 ZINC PER QQ-Z-363.
- 2 PTFE PER MIL-P-19468.
- 3 COPPER-IRON ALLOY PER ASTM-B-465.
- 4 COPPER PER QQ-C-576.
- 5 COPPER-NICKEL ALLOY PER ASTM-B-122.
- 6 NICKEL PLATE PER QQ-N-290  
3.81  $\mu\text{m}$  [.000150] MINIMUM THICK.
- 7 GOLD PLATE PER MIL-G-45204  
0.76  $\mu\text{m}$  [.000030] MINIMUM THICK.
- 8 TIN PLATE PER ASTM-B-545,  
2.54  $\mu\text{m}$  [.000100] MIN THICK.
- 9 GOLD PLATE PER MIL-G-45204
- 10 BERYLLIUM COPPER PER ASTM-B-643
- 11 .010±.001 THICK, MYLAR (POLYESTER FILM) INSULATOR, AMP P/N 1274912-1, ATTACHED TO BOTTOM, (NOT SHOWN).
- 12. CONNECTOR PRESS FIT IS DESIGNED TO PROVIDE 100 LB. MINIMUM AXIAL RETENTION TO PCB COMPLIANT WITH TYCO APPLICATION SPEC 114-12001. AS A RESULT, DEFORMATION OF PLATED THROUGH HOLES WILL OCCUR. CUSTOMER VALIDATION AND ACCEPTANCE OF THIS DEFORMATION IS RECOMMENDED PRIOR TO SPECIFYING USE OF THIS PRODUCT.

5222462-4
5222462-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA 22APR2005 CHK J. HAVENER 22APR2005 J. LIPPERT 22APR2005	<b>Tyco Electronics</b> Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: mm [INCHES] TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .005 1 PLC ± .005 2 PLC ± .005 (.002) 3 PLC ± .005 4 PLC ± .005 ANGLES ± .005	PRODUCT SPEC: 108-12103 APPLICATION SPEC: 114-12001 WEIGHT: - FINISH: 6 THRU 10	NAME: JACK, PCB, HIGH RETENTION PRESS FIT, 75 OHM, BNC SIZE: A2 CASE CODE: 00779 DRAWING NO: C-5222462 RESTRICTED TO: - CUSTOMER DRAWING	SCALE: 5:1 SHEET: 1 OF 1 REV: B