

4



3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		F	LTR	DESCRIPTION	DATE	OWN	APP'D
AJ	16	0		REV PER EC-0514-0496-04	01FEB2005	GA	JL

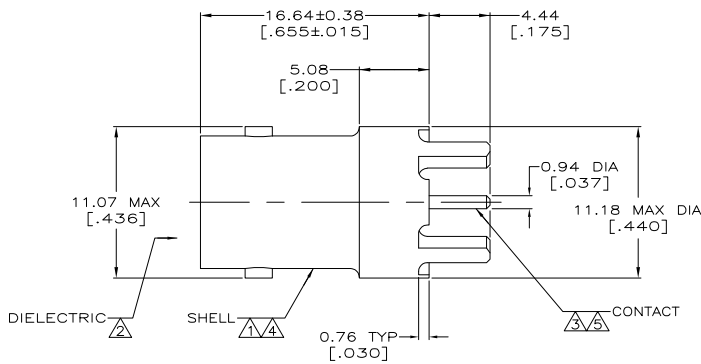

- 1 ZINC PER QQ-Z-363.
- 2 PTFE PER MIL-P-19468.
- 3 PHOSPHOR BRONZE PER QQ-B-750.
- 4 TIN PLATE PER ASTM-B-545, 3.04 μm [.000120] MINIMUM THICK.
- 5 GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUM THICK.
- 6. SEE INSTRUCTION SHEET 408-9889.

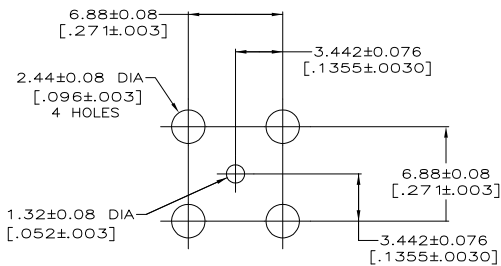

5414394-1
 PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN G. ATTADIA 01FEB2005	DOCS DOCS 01FEB2005	Tyco Electronics	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: mm [INCHES]		CHK J. HAVENER 01FEB2005	NAME J. LIPPERT 01FEB2005	JACK, VERTICAL, 75 OHM, PCB, BNC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC:		SIZE	CAGE CODE
0 PLG	± .00	PRODUCT SPEC:		A2	00779
1 PLG	± .00	WEIGHT:		C=	5414394
2 PLG	± 0.20 (.008)	FINISH:		SCALE	5:1
3 PLG	± .00	MATERIAL:		SHEET	1 OF 1
4 PLG	± .00	SEE NOTES 1 - 3		REV	0
SEE NOTES 4 - 5		CUSTOMER DRAWING			

AMP 1471-9 REV 31MM2000

5414394

B

A