

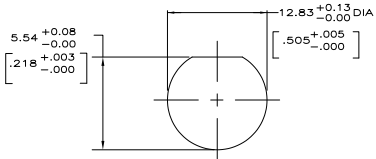
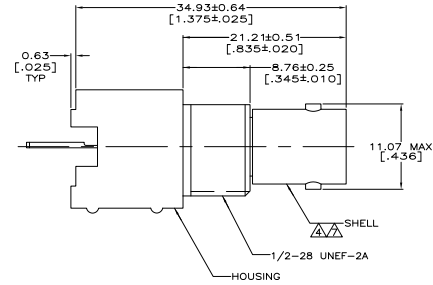



REV	DATE	DESCRIPTION	BY	APP'D
00				
01	7/21/2008	REV PER ECO 08-00474	DW	JL

- ▲ POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-0 RATED, COLOR:NATURAL
- ▲ POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-0 RATED, COLOR:BLACK
- ▲ POLYMETHYLPENTENE, GENERAL PURPOSE.
- ▲ ZINC PER QQ-Z-363.
- ▲ PHOSPHOR BRONZE PER QQ-B-750.
- ▲ BRASS PER ASTM-B-453.
- ▲ NICKEL PLATE PER QQ-N-290, 3.81 μm [.000150] MINIMUM THICK.
- ▲ TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- ▲ GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUM THICK.
- ▲ SILVER PLATE PER QQ-S-365, 2.54 μm [.000100] MINIMUM THICK.
- ▲ TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- 12. SEE INSTRUCTION SHEET 2769.

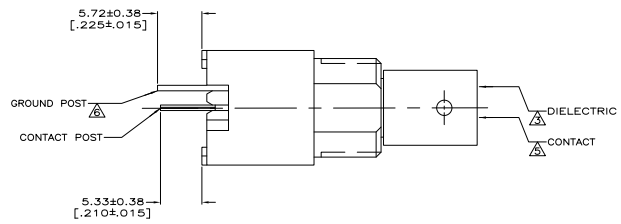

RECOMMENDED PANEL CUTOUT

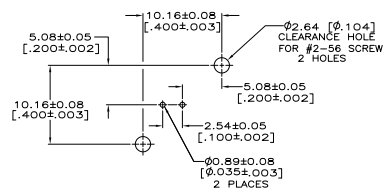

PCB CONFIGURATION

REVISION	DATE	DESCRIPTION	BY	APP'D
9-226993-0				
226993-6				
226993-5				
226993-4				
226993-3				
226993-2				
226993-1				

GROUND POST PLATING	CONTACT POST PLATING	CONTACT PLATING	HOUSING MATERIAL	PART NUMBER
▲	▲	▲	▲	9-226993-0
▲	▲	▲	▲	226993-6
▲	▲	▲	▲	226993-5
▲	▲	▲	▲	226993-4
▲	▲	▲	▲	226993-3
▲	▲	▲	▲	226993-2
▲	▲	▲	▲	226993-1

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 08-20-08 BY: TYS ELECTRONICS CORPORATION

DESIGNER: J. SCOTT DATE: 08-20-08 BY: TYS ELECTRONICS CORPORATION

WORKS: TYS ELECTRONICS CORPORATION

REVISIONS: 108-12078

DATE: 08-20-08 DRAWING NO: 100779 Q=226993

CUSTOMER DRAWING