

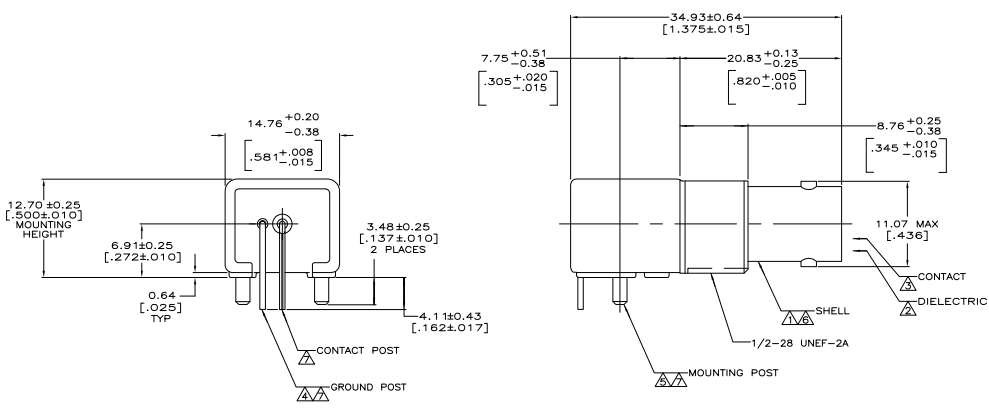


REV	DATE	DESCRIPTION	BY	CHK	APP
AJ	16	REVISION			
A		REVISED PER EC 0514-0150-05	28A/005	EM	JL



- ▲ ZINC PER QQ-Z-363.
- ▲ POLYMETHYLPENTENE PER ASTM-D-1238.
- ▲ PHOSPHOR BRONZE PER QQ-B-750.
- ▲ BRASS PER ASTM-B-453.
- ▲ BRASS PER ASTM-B-16.
- ▲ NICKEL PLATE PER QQ-N-290, 3.81 μm [0.000150] MINIMUM THICK.
- ▲ TIN PLATE PER ASTM-B-545, 3.81 μm [0.000150] MINIMUM THICK.
- ▲ GOLD PLATE PER MIL-G-45204, 1.27 μm [0.000050] MINIMUM THICK.
- ▲ GOLD PLATE PER MIL-G-45204, 0.76 μm [0.000030] MINIMUM THICK.
- 10. SEE INSTRUCTION SHEET 408-2769.



RECOMMENDED PANEL CUTOUT

PCB CONFIGURATION

▲	5413879-2
▲	5413879-1
CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	BY	APPROVED
DRAWING NO. 108-12078		108-12078		
REVISED PER EC 0514-0150-05				
CUSTOMER DRAWING		DATE	BY	APPROVED
SEE NOTES 1-5		SEE NOTES 6-9		

TYSO Electronics Corporation Harrisburg, Pa 17105-3608	
JACK, RIGHT ANGLE, PCB 50 OHM, SERIES BNC	
100	00779G=5413879
1	1