

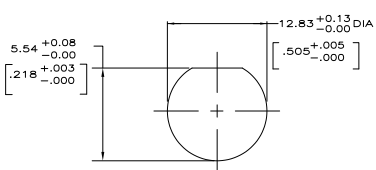
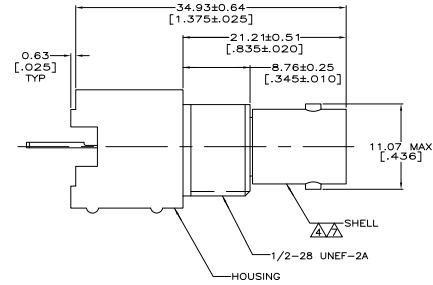



REV	DATE	DESCRIPTION	BY	CHK	APP
AJ	16				
B		REV PER ECO 08-009474			7/22/2008 DW JL

- ▲ POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-0 RATED, COLOR:NATURAL
- ▲ POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-0 RATED, COLOR:BLACK
- ▲ POLYMETHYLPENTENE, GENERAL PURPOSE.
- ▲ ZINC PER QQ-Z-363.
- ▲ PHOSPHOR BRONZE PER QQ-B-750.
- ▲ BRASS PER ASTM-B-453.
- ▲ NICKEL PLATE PER QQ-N-290, 3.81 μm [.000150] MINIMUM THICK.
- ▲ TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- ▲ GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUM THICK.
- 10. SEE INSTRUCTION SHEET 408-2769.

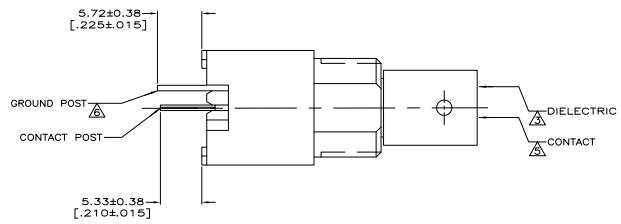

RECOMMENDED PANEL CUTOUT

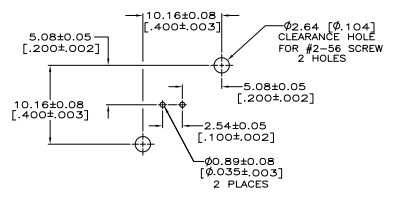

PCB CONFIGURATION

GROUND POST PLATING	CONTACT POST PLATING	CONTACT PLATING	HOUSING MATERIAL	PART NUMBER
▲	▲	▲	▲	5226993-6
▲	▲	▲	▲	5226993-3
▲	▲	▲	▲	5226993-2
▲	▲	▲	▲	5226993-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		ALCOCELA		TYS Electronics Corporation	
DRAWN BY: [Signature]		DATE: 108-12078		Harrisburg, Pa 17105-3608	
CHECKED BY: [Signature]		DATE: 108-12078		JACK, VERTICAL	
APPROVED BY: [Signature]		DATE: 108-12078		50 OHM, PCB, SERIES BNC	
TITLE: CUSTOMER DRAWING		PART NO: A100779		REV: 1	
DRAWING NO: A100779		REV: 1		REV: B	