THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
AJ	16

REVISIONS

P	LTR	DESCRIPTION	DATE	EBR	APVD
	A	REVISED PER EC 0514-0150-05	10OCT2005	REH	JL

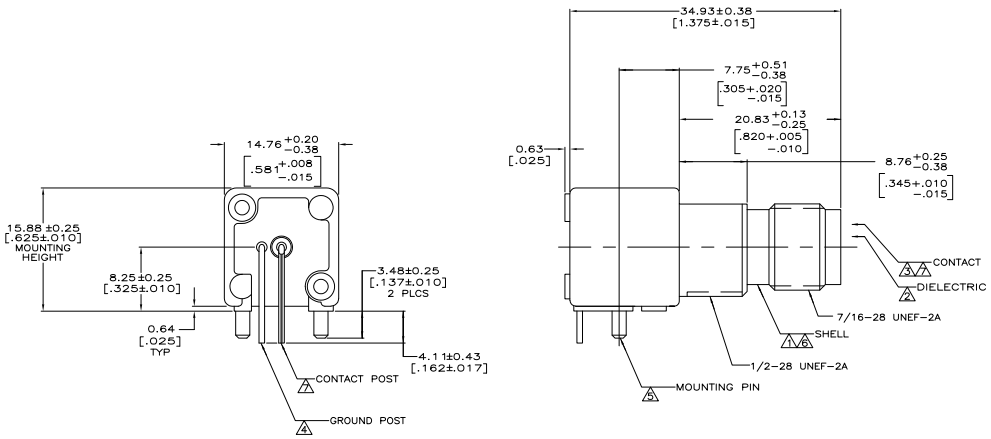

1. ZINC PER QQ-Z-363.
2. POLYMETHYLPENTENE, GENERAL PURPOSE.
3. PHOSPHOR BRONZE PER QQ-B-750.
4. BRASS PER ASTM-B-453.
5. BRASS PER ASTM-B-16.
6. NICKEL PLATE PER QQ-N-290, 3.81 µm [.000150] MINIMUM THICK.
7. GOLD PLATE PER MIL-G-45204, 0.76 µm [.000030] MINIMUM THICK.

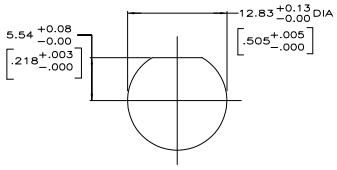

RECOMMENDED PANEL CUTOUT

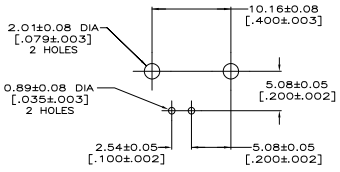

PCB CONFIGURATION

5227839-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.	TSR: T. VARELA — DOCKET ENGINEER	Tyco Electronics Corporation, Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]	CM: J. HAVENER — ENGINEER	NAME: JACK, RIGHT ANGLE, 50 OHM, PCB, TNC	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± –, 1 PLC ± .x 0.20 [.008], 2 PLC ± .xx, 3 PLC ± .xxx, 4 PLC ± –, ANGLES ± –	APD: J. LIPPERT — ENGINEER	PRODUCT SPEC: –	
		APPLICATION SPEC: –	SIZE: A1 — CAGE CODE: 00779 — DRAWING NO: C-5227839 — RESTRICTED TO: –
MATERIAL: SEE NOTES 1-4 — FINISH: SEE NOTES 5-7		WEIGHT: –	CUSTOMER DRAWING — SCALE: 4:1 — SHEET: 1 OF 1 — REV: A

AMP 4805 REV 31MAY2000

Downloaded from Elcodis.com electronic components distributor