

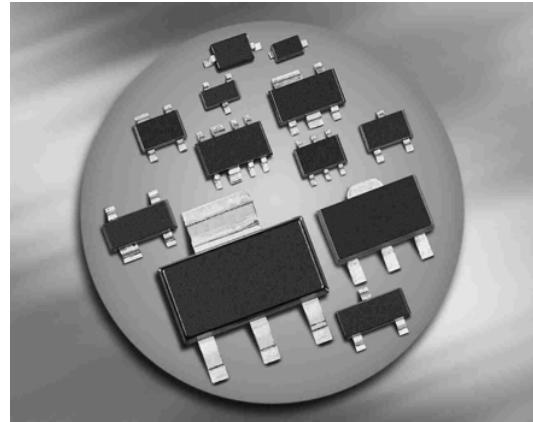


### NPN Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ( $R_1=2.2\text{k}\Omega$ ,  $R_2=2.2\text{k}\Omega$ )
- For 6-PIN packages: two (galvanic) internal isolated transistors with good matching in one package



**BCR103/F**  
**BCR103L3/T**



Type	Marking	Pin Configuration						Package
BCR103	WAs	1=B	2=E	3=C	-	-	-	SOT23
BCR103F	WAs	1=B	2=E	3=C	-	-	-	TSFP-3
BCR103L3	WA	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR103T	WAs	1=B	2=E	3=C	-	-	-	SC75
BCR103U	WAs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SC74

**Maximum Ratings**

Parameter	Symbol	Value	Unit
Collector-emitter voltage BCR103, $T_S \leq 102^\circ\text{C}$	$V_{CEO}$	50	V
Collector-base voltage BCR103F, $T_S \leq 128^\circ\text{C}$	$V_{CBO}$	50	
Emitter-base voltage BCR103L3, $T_S \leq 135^\circ\text{C}$	$V_{EBO}$	5	
Input on voltage BCR103T, $T_S \leq 109^\circ\text{C}$	$V_{i(on)}$	10	
Collector current BCR103U, $T_S \leq 118^\circ\text{C}$	$I_C$	100	mA
Total power dissipation- BCR103, $T_S \leq 102^\circ\text{C}$	$P_{tot}$	200	mW
BCR103F, $T_S \leq 128^\circ\text{C}$		250	
BCR103L3, $T_S \leq 135^\circ\text{C}$		250	
BCR103T, $T_S \leq 109^\circ\text{C}$		250	
BCR103U, $T_S \leq 118^\circ\text{C}$		250	
Junction temperature	$T_j$	150	°C
Storage temperature	$T_{stg}$	-65 ... 150	

**Thermal Resistance**

Parameter	Symbol	Value	Unit
Junction - soldering point <sup>1)</sup> BCR103	$R_{thJS}$	$\leq 240$	K/W
BCR103F			
BCR103L3			
BCR103T			
BCR103U			


<sup>1</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$	$V_{(\text{BR})\text{CBO}}$	50	-	-	
Collector-base cutoff current $V_{CB} = 40 \text{ V}, I_E = 0$	$I_{\text{CBO}}$	-	-	100	nA
Emitter-base cutoff current $V_{EB} = 10 \text{ V}, I_C = 0$	$I_{\text{EBO}}$	-	-	3.5	mA
DC current gain <sup>1)</sup> $I_C = 20 \text{ mA}, V_{CE} = 5 \text{ V}$	$h_{\text{FE}}$	20	-	-	-
Collector-emitter saturation voltage <sup>1)</sup> $I_C = 20 \text{ mA}, I_B = 1 \text{ mA}$	$V_{\text{CEsat}}$	-	-	0.3	V
Input off voltage $I_C = 100 \mu\text{A}, V_{CE} = 5 \text{ V}$	$V_{i(\text{off})}$	0.8	-	1.5	
Input on voltage $I_C = 2 \text{ mA}, V_{CE} = 0.3 \text{ V}$	$V_{i(\text{on})}$	0.8	-	2.5	
Input resistor	$R_1$	1.5	2.2	2.9	kΩ
Resistor ratio	$R_1/R_2$	0.9	1	1.1	-
<b>AC Characteristics</b>					
Transition frequency $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ MHz}$	$f_T$	-	140	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	$C_{cb}$	-	3	-	pF

<sup>1)</sup>Pulse test:  $t < 300\mu\text{s}$ ;  $D < 2\%$


**DC current gain**  $h_{FE} = f(I_C)$   
 $V_{CE} = 5V$  (common emitter configuration)

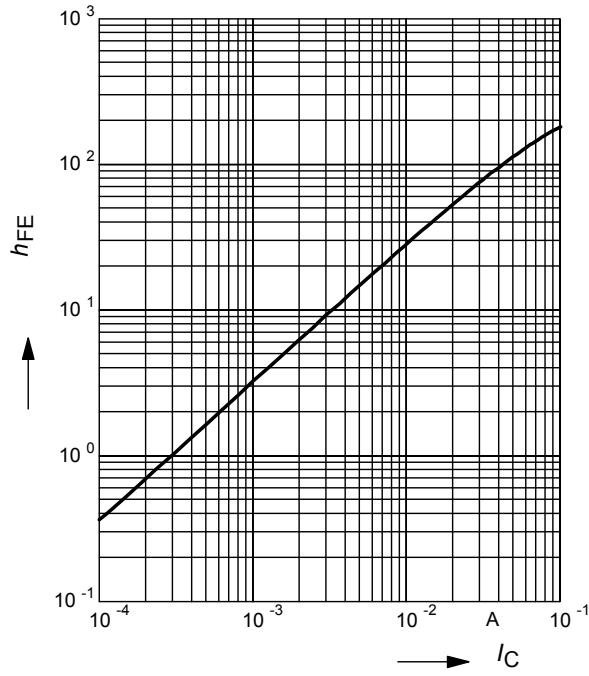


**Input on Voltage**  $V_{i(on)} = f(I_C)$   
 $V_{CE} = 0.3V$  (common emitter configuration)

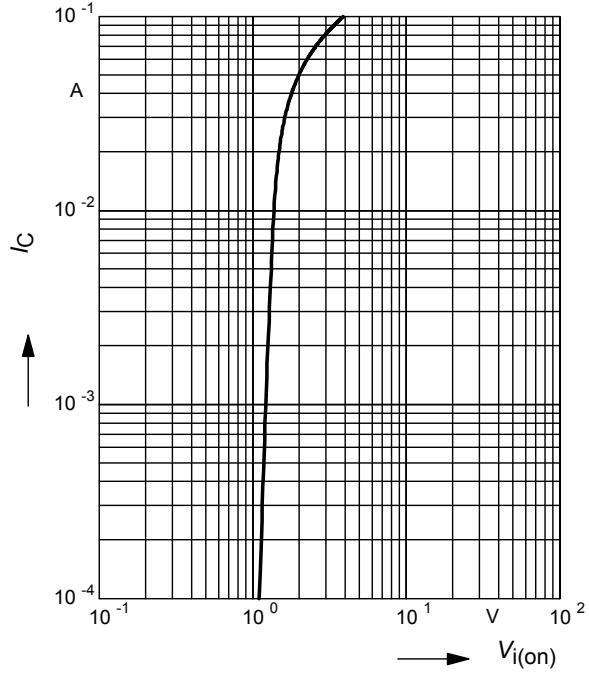


**Collector-emitter saturation voltage**  
 $V_{CEsat} = f(I_C)$ ,  $h_{FE} = 20$

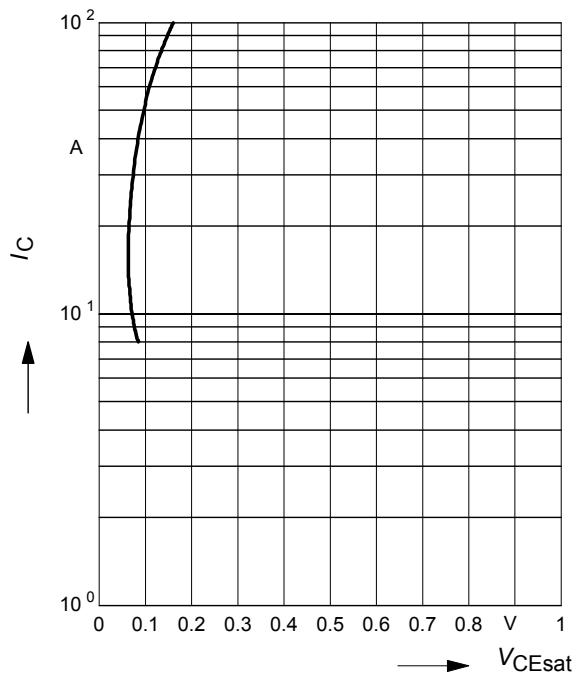

**Input off voltage**  $V_{i(off)} = f(I_C)$   
 $V_{CE} = 5V$  (common emitter configuration)

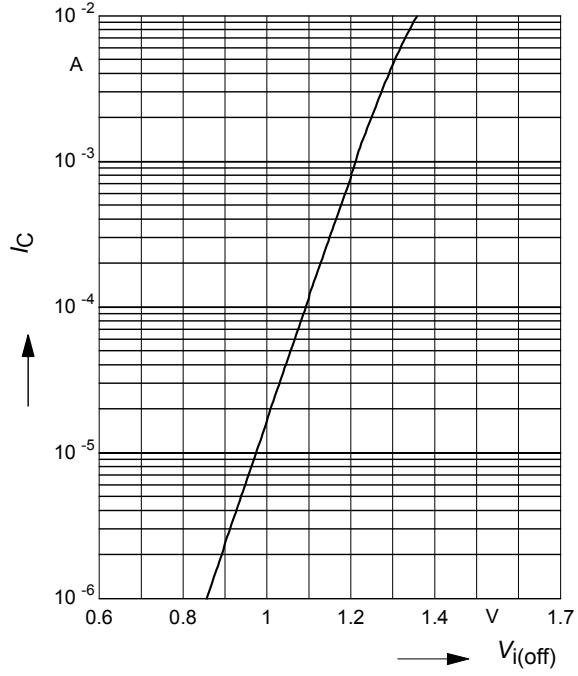


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR103

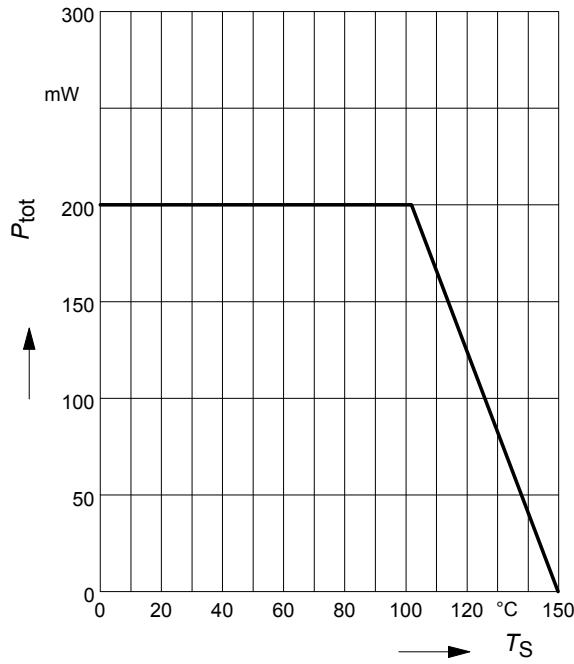



**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR103F

**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR103F

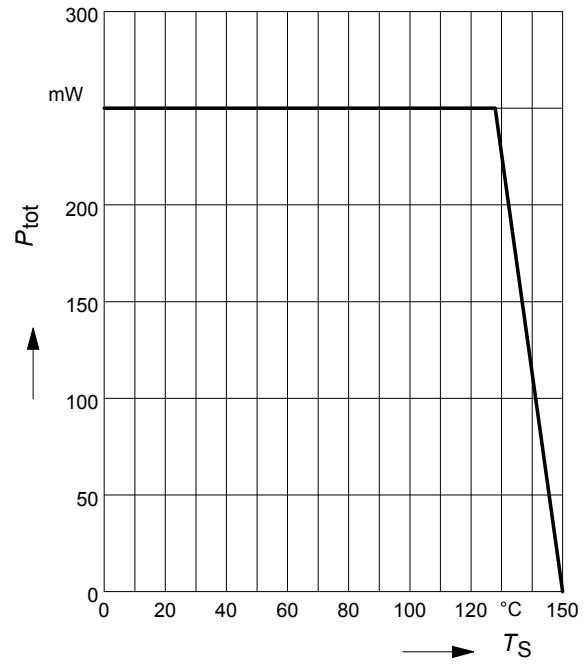


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR103L3


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR103T

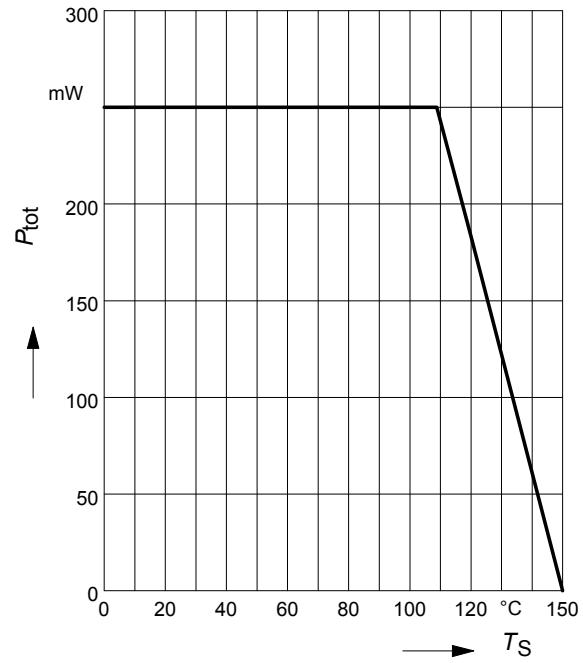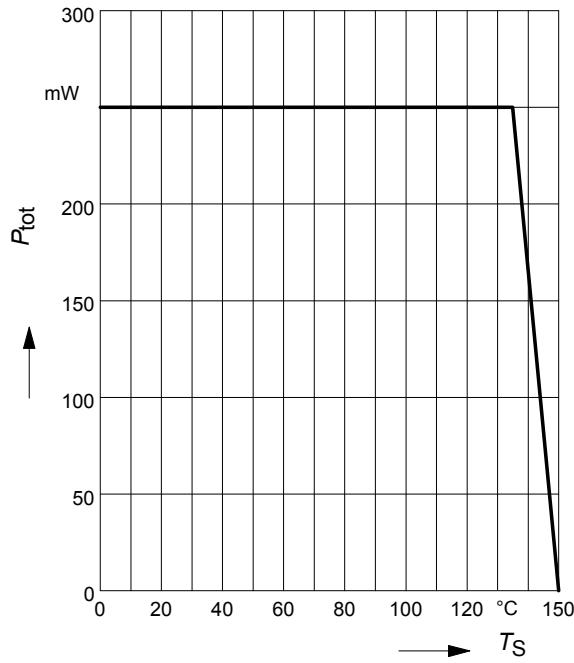


**Total power dissipation**  $P_{\text{tot}} = f(T_S)$   
BCR103U

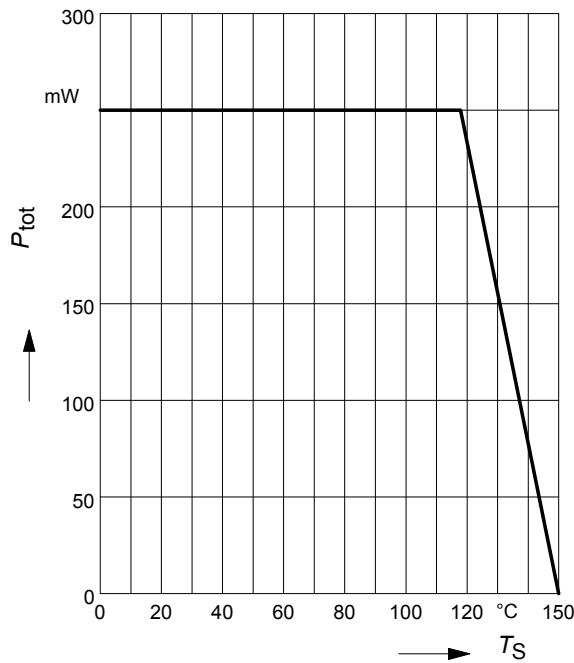


**Permissible Pulse Load**  $R_{\text{thJS}} = f(t_p)$   
BCR103

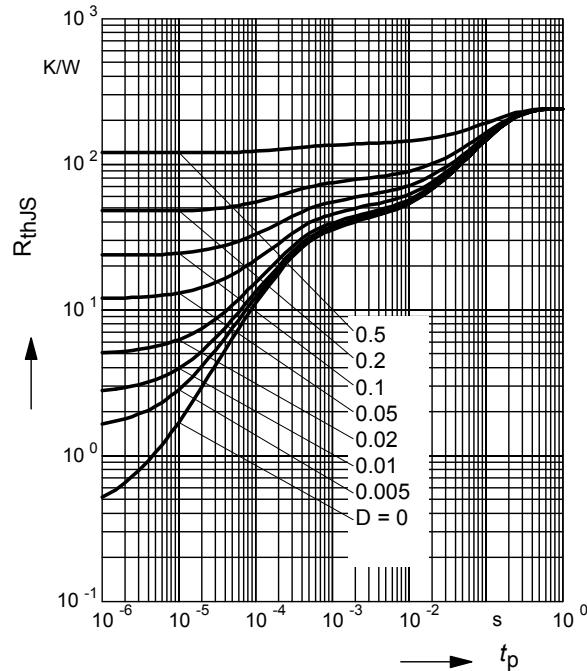

**Permissible Pulse Load**  
 $P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$   
BCR103

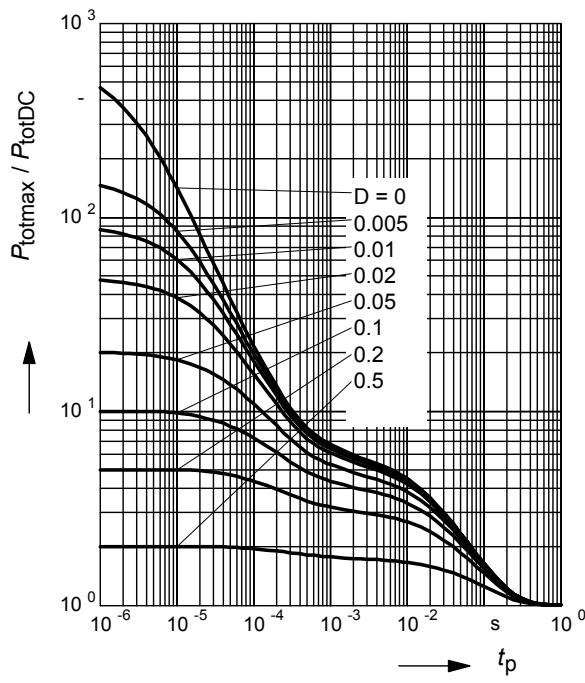


**Permissible Pulse Load**  $R_{\text{thJS}} = f(t_p)$   
BCR103F

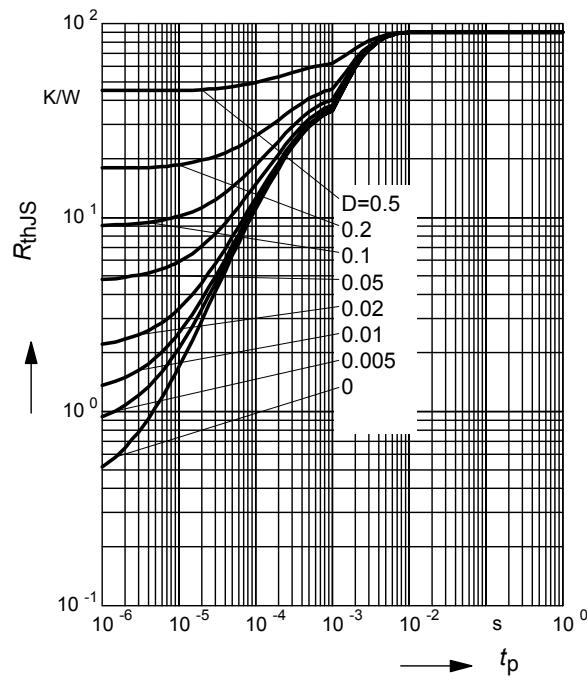

**Permissible Pulse Load**


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR103F

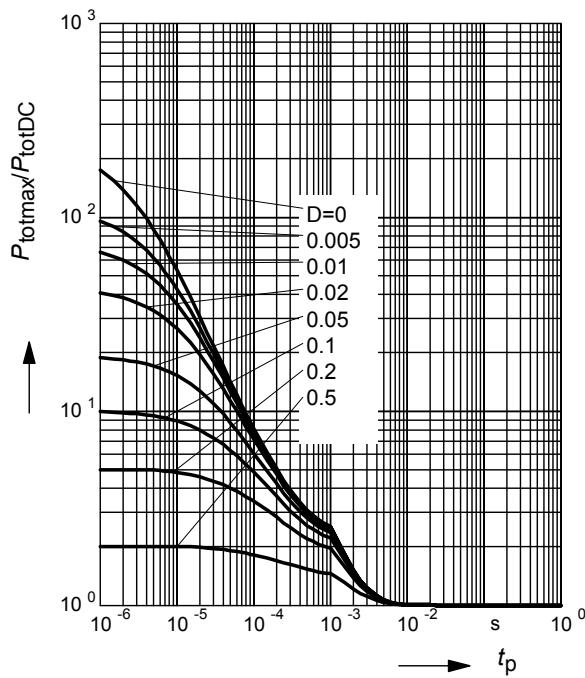

**Permissible Pulse Load**

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$


BCR103L3

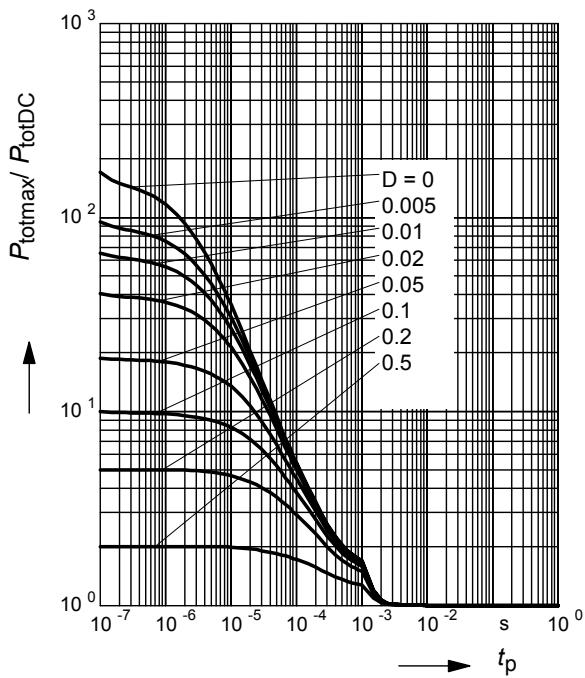
**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 

BCR103L3

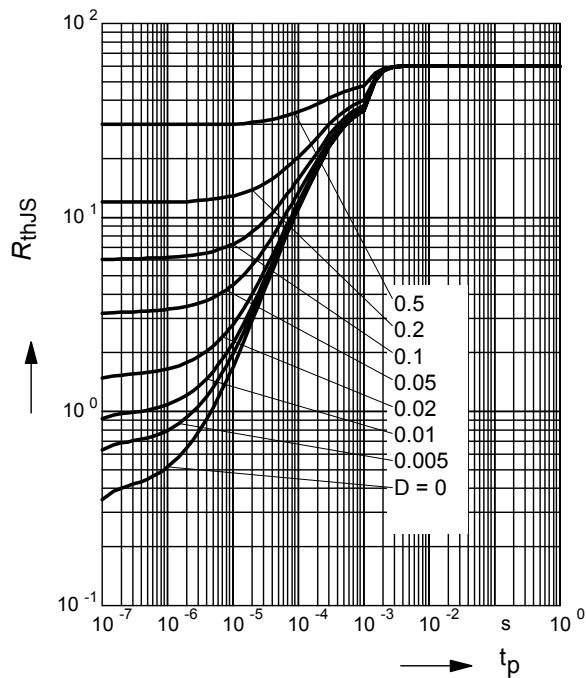
**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 


BCR103T

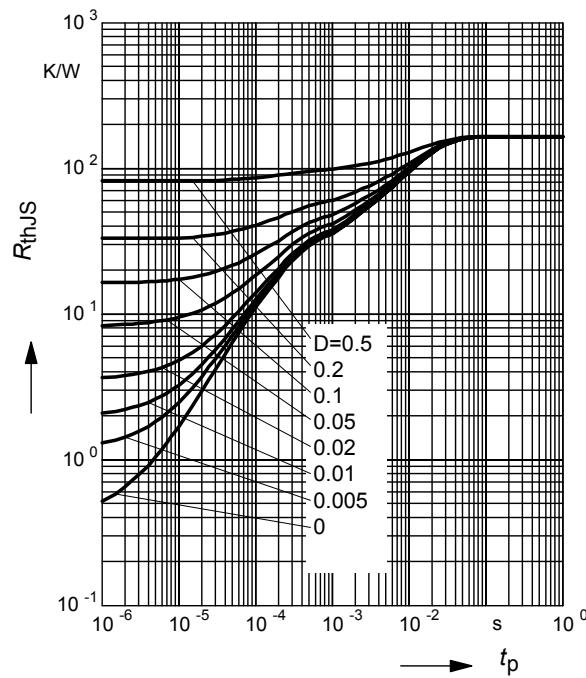

### Permissible Pulse Load


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR103T

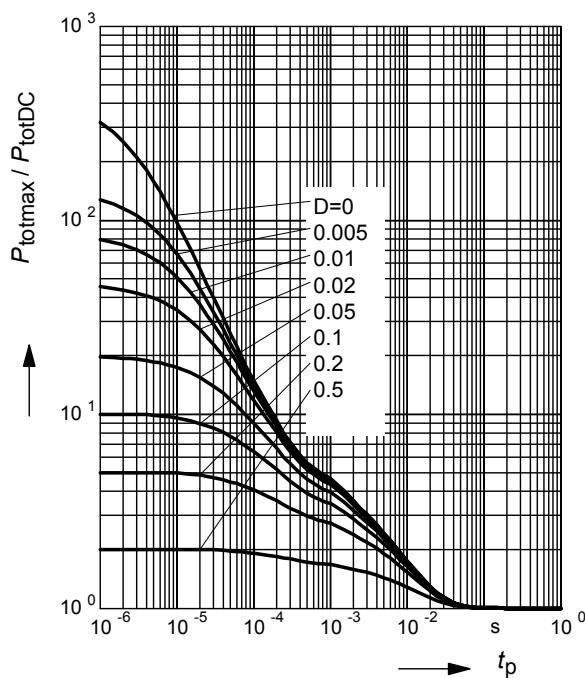

### Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$

BCR103U

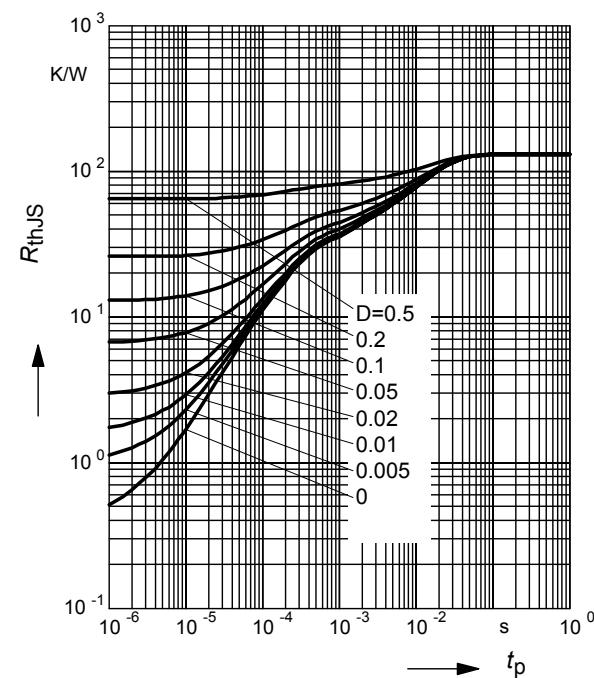

### Permissible Pulse Load

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR103U

