

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	MIN	APVD
AJ	00	T		REVISED PER EDD 06-024121	1/29/2007	DW	JL

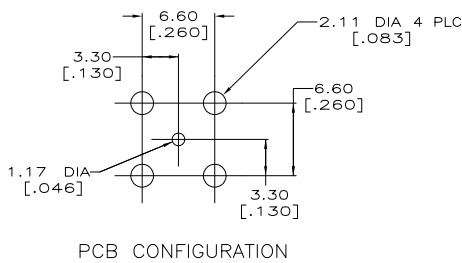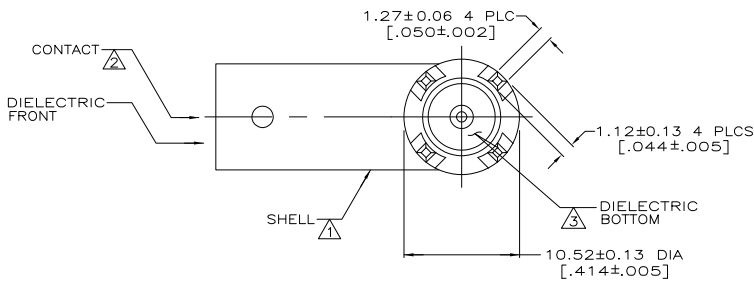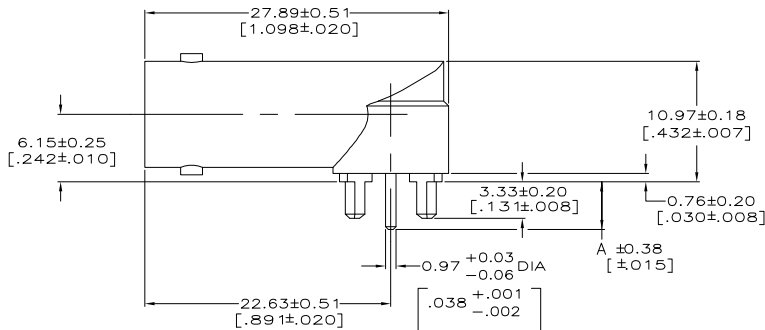

- △ ZINC PER QQ-Z-363.
- △ BERYLLIUM COPPER PER QQ-C-530.
- △ PTFE PER MIL-P-19468.
- △ NICKEL PLATE PER QQ-N-290, 3.81 μ m [.000150] MINIMUM THICK.
- △ TIN-LEAD PLATE PER ASTM-B-545, 3.04 μ m [.000120] MINIMUM THICK OVER NICKEL PLATE PER MIL-C-26074, 7.62 μ m [.000300] MINIMUM THICK.
- △ GOLD PLATE PER MIL-G-45204, 1.27 μ m [.000050] MINIMUM THICK.
- 7. INTERFACE PER MIL-C-39012.
- △ GOLD PLATE PER MIL-G-45204, 0.76 μ m [.000030] MINIMUM THICK.
- △ POLYMETHYLPENTENE: GENERAL PURPOSE

OBSELETE	△	4.34	[.171]	△	△	413558-5
	△	4.34	[.171]	△	△	413558-4
	△	3.33	[.131]	△	△	413558-3
	△	4.34	[.171]	△	△	413558-2
	△	4.34	[.171]	△	△	413558-1
FRONT DIELECTRIC MATERIAL		A		CONTACT FINISH	SHELL FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN	J. LIPPERT	7-1-91	Tyco Electronics Corporation Harrisburg, PA 17105-3608
		OK	A. GABANY	8-5-91	
DIMENSIONS: INCHES		APD	A. GABANY	8-5-91	JACK, RIGHT ANGLE, PCB, 75 OHM, SERIES BNC
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	108-12078	APPLICATION SPEC	
MATERIAL: SEE NOTES 1-3		FINISH	SEE NOTES 4-6	SIZE	CAGE CODE
				A2	00779
				C=	413558
				SCALE	4:1
				SHEET	1 of 1
				REV	T
				CUSTOMER DRAWING	
				RESTRICTED TO	

AMP 1471-9 REV 31MM2000

413558

A