

4


3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AJ	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		REVISED PER EC OS14-0150-05	30AUG05	BM	JL

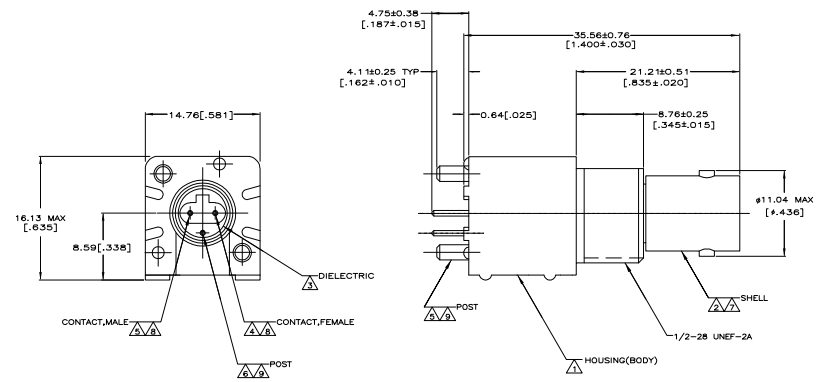

- ▲ POLYESTER, PBT, 15% GLASS FIBER REINFORCED, NATURAL, PER MIL-M-24519.
- ▲ ZINC PER QQ-Z-363.
- ▲ POLYMETHYLPENTENE, GENERAL PURPOSE.
- ▲ PHOSPHOR BRONZE PER QQ-B-750.
- ▲ BRASS PER QQ-B-626.
- ▲ BRASS PER ASTM-B-453.
- ▲ NICKEL PL PER QQ-N-290, 3.81µm[.000150] MINIMUM THICK
- ▲ GOLD PL PER MIL-G-45204, 0.76µm[.000030] MINIMUM THICK
- ▲ TIN PLATE PER ASTM-B-545, 3.81µm[.000150] MINIMUM THICK



RECOMMENDED
 PANEL CUTOUT

5221198-1
 PART
 NUMBER

PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - DOCK5 21APR2005		Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		CHK J. HAVENER 21APR2005		NAME JACK, VERTICAL, PCB, SERIES TWIN BNC	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.20[.008] 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD J. LIPPERT 21APR2005	PRODUCT SPEC	APPLICATION SPEC	RESTRICTED TO
MATERIAL ▲ ▲ ▲ ▲ ▲		FINISH ▲ ▲ ▲ ▲ ▲	WEIGHT	SIZE A3	CAGE CODE 00779
CUSTOMER DRAWING			DRAWING NO 5221198	SCALE 2:1	SHEET 1 OF 1