

PC920 Power OPIC Photocoupler

T-4/-83

■ Features


1. High power
(I_{O1} : MAX. -0.8A (DC))
(I_{O2} : MAX. 1.6A (Pulse))
2. Low input current drive
(I_{FLH} : MAX. 2mA at $T_a = T_{opr}$)
3. Operating supply voltage V_{cc} : 5.4~15V
4. Compact single-in-line package (With heat sink)
5. UL recognized, file No. E64380

■ Applications

1. Inverter controlled air conditioners

■ Outline Dimensions

(Unit : mm)

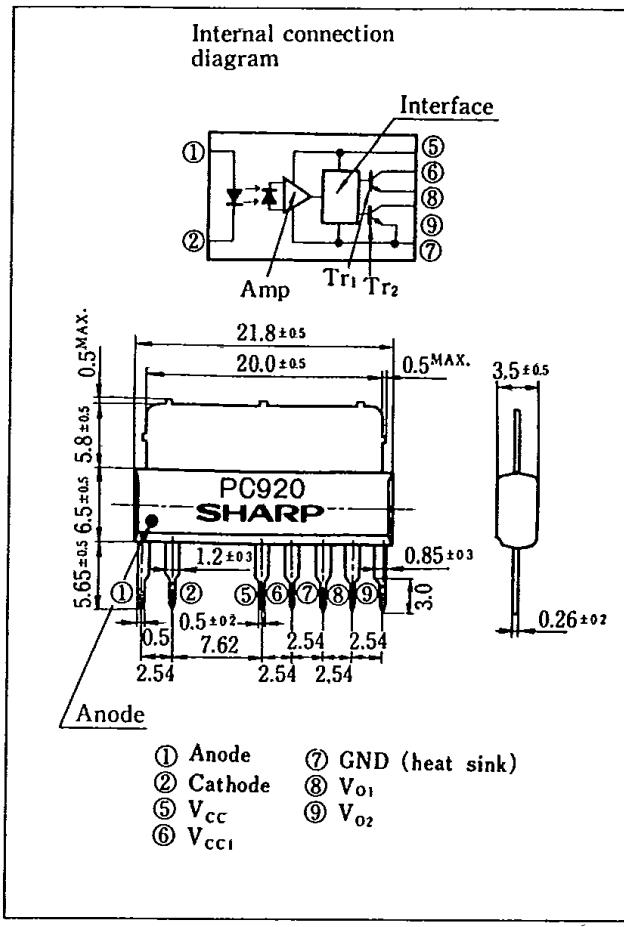

6

* OPIC is a registered trademark of Sharp and stands for Optical IC. It has a light detecting element and signal processing circuitry integrated onto a single chip.

■ Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Input	Forward current	I _F	mA
	Reverse voltage	V _R	V
	Power dissipation	P	mW
Output	Supply voltage	V _{cc}	V
	V _{O1} output current	I _{O1}	A
	* ¹ V _{O2} output current	I _{O2P}	A
Total power dissipation	P _{tot}	1,200	mW
* ² Isolation voltage	V _{iso}	1,500	Vrms
Operating temperature	T _{opr}	-20 ~ +80	°C
Storage temperature	T _{stg}	-55 ~ +125	°C
* ³ Soldering temperature	T _{sot}	260	°C

*1 Pulse width $\leq 10\mu s$, Duty ratio = 0.02

*2 RH = 40~60%, AC for 1 minute

*3 For 10 seconds

■ Electro-optical Characteristics



(Ta=25°C unless specified)



Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_F	$I_F = 2\text{mA}$	—	1.1	1.4	V
	Reverse current		$I_F = 0.1\text{mA}$	0.6	0.95	—	
	Terminal capacitance	C_t	$V = 0, f = 1\text{kHz}$	—	30	80	pF
Output	Operating supply voltage	V_{CC}		5.4	6.0	15	V
	V_{O1} output voltage	V_{O1}	$V_{CC} = V_{CC1} = 6\text{V}, I_{O1} = -0.3\text{A}, I_F = 2\text{mA}$	4.5	5.2	—	V
	V_{O2} output voltage	V_{O2}	$V_{CC} = V_{CC1} = 6\text{V}, I_{O2P} = 1\text{A}, I_F = 0$	—	0.3	2.0	V
	V_{O1} leak current	I_{OL1}	$V_{CC} = V_{CC1} = 6\text{V}, V_{O1} = \text{GND}, I_F = 0$	—	—	200	μA
	V_{O2} leak current	I_{OL2}	$V_{CC} = V_{CC1} = V_{O2} = 6\text{V}, I_F = 2\text{mA}$	—	—	200	μA
	High level supply current	I_{CCH}	$V_{CC} = V_{CC1} = 6\text{V}, I_F = 2\text{mA}$	—	5	10	mA
	Low level supply current	I_{CCL}	$V_{CC} = V_{CC1} = 6\text{V}, I_F = 0$	—	12	20	mA
Transfer characteristics	"Low→High" threshold input current	I_{FLH}	$V_{CC} = V_{CC1} = 6\text{V}, R_{L1} = 15\Omega$	—	0.5	1.0	mA
			$T_a = T_{opt}, V_{CC} = V_{CC1} = 6\text{V}, R_{L1} = 15\Omega$	0.1	—	2.0	mA
	Isolation resistance	R_{ISO}	$DC = 500\text{V}, RH = 40\sim 60\%$	5×10^{10}	10^{11}	—	Ω
	"Low→High" propagation time	t_{PLH}	$V_{CC} = V_{CC1} = 6\text{V}$ $I_F = 2\text{mA}$	—	3	10	μs
	"High→Low" propagation time	t_{PHL}		—	3	10	
	Rise time	t_r	$R_{L1} = 15\Omega$	—	0.2	2	
	Fall time	t_f		—	0.2	2	

*4 I_{FLH} represents forward current when output goes from "low" to "high".


■ Truth Table

Input	Output	Tr_1	Tr_2
ON	High level	ON	OFF
OFF	Low level	OFF	ON

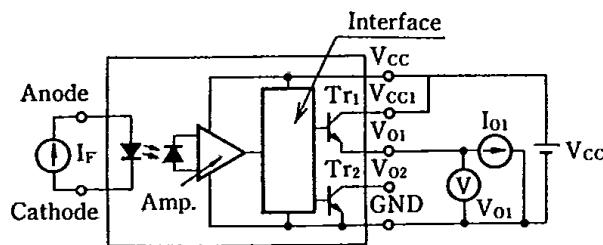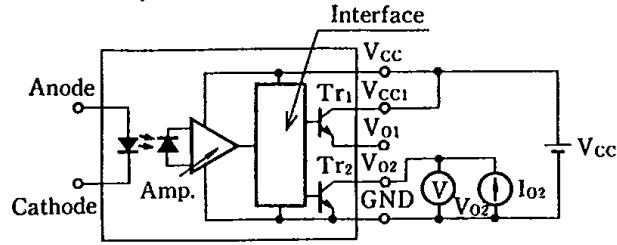Test Circuit for V_{O1} Test Circuit for V_{O2} 

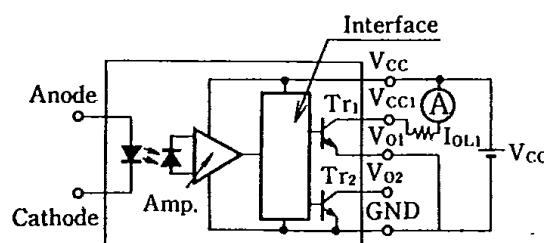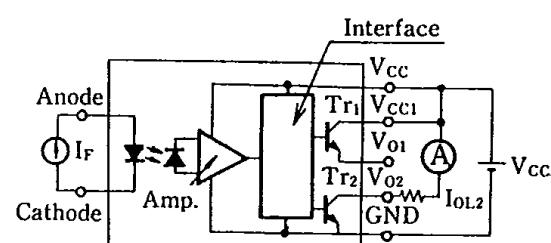Test Circuit for I_{OL1} Test Circuit for I_{OL2} 

Test Circuit for Response Time

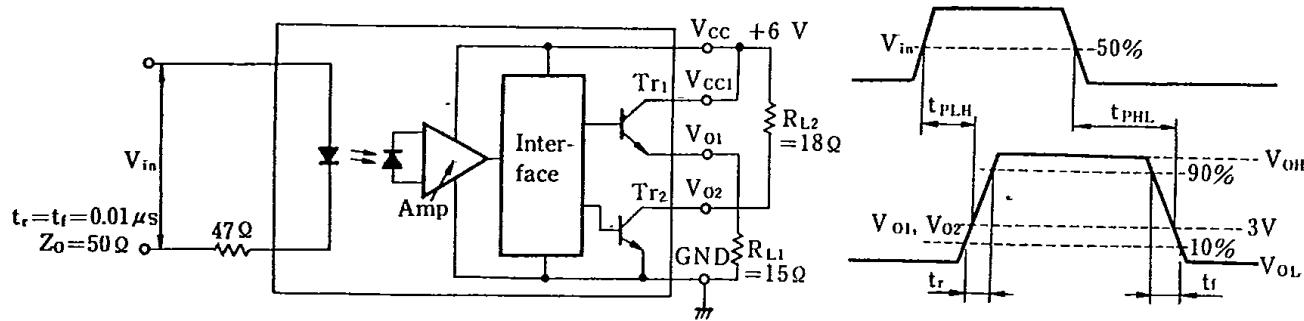

6

Fig. 1 Forward Current vs. Ambient Temperature

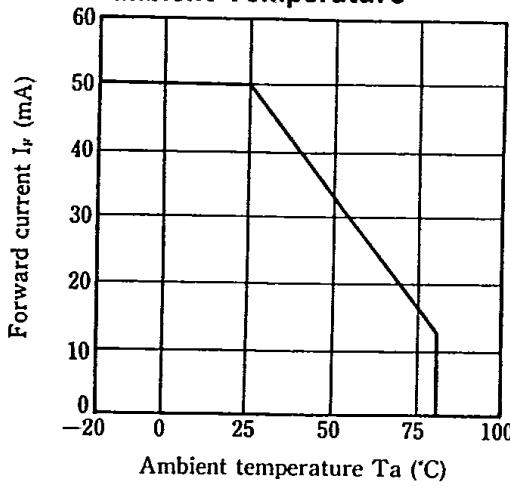


Fig. 2 Total Power Dissipation vs. Ambient Temperature

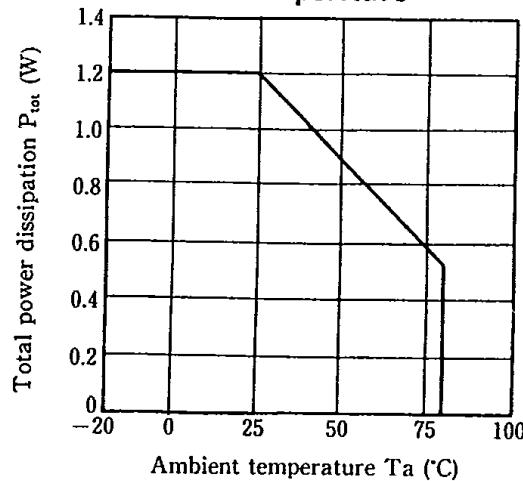
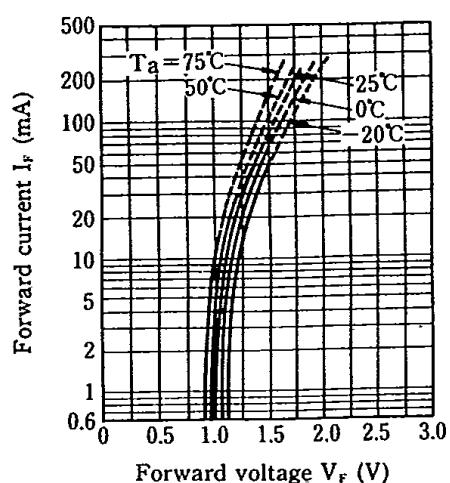
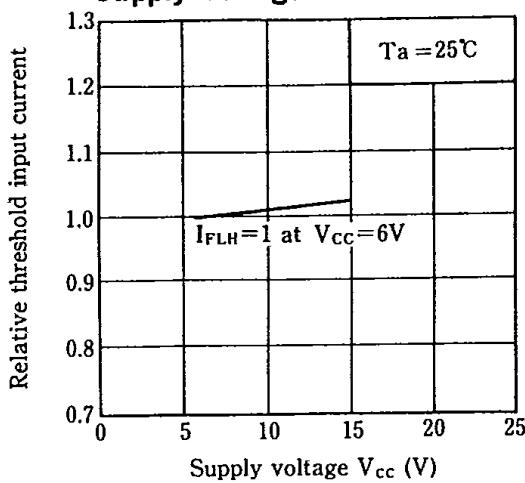
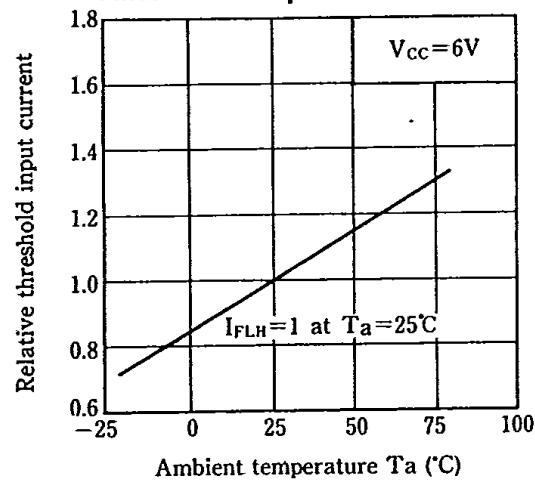
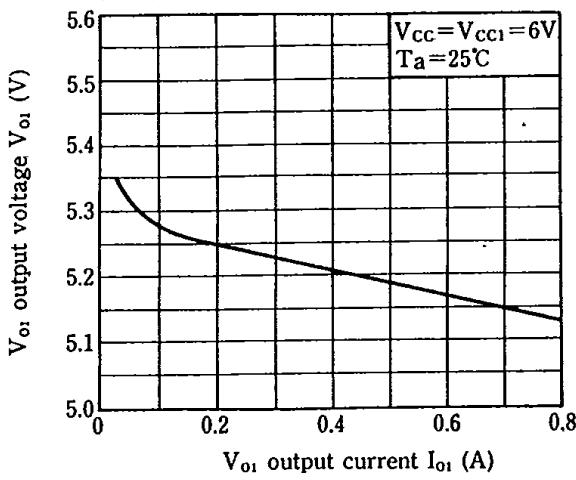
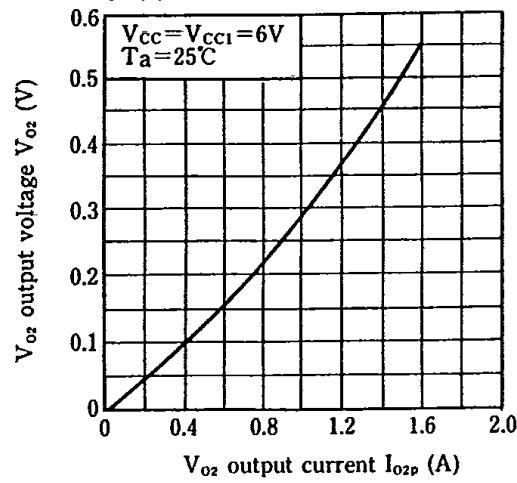
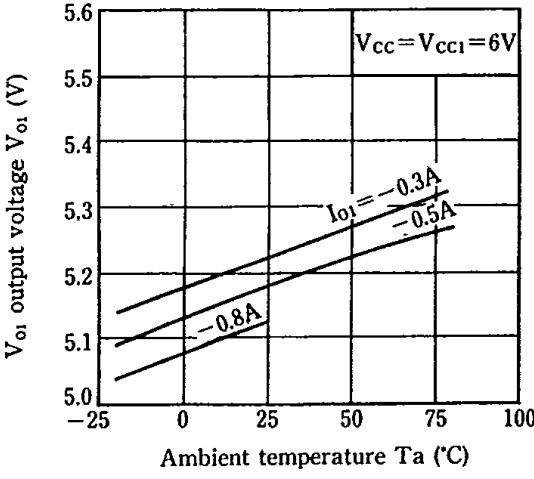


Fig. 3 Forward Current vs. Forward Voltage**Fig. 4 Relative Threshold Input Current vs. Supply Voltage****Fig. 5 Relative Threshold Input Current vs. Ambient Temperature****Fig. 6 Output Voltage vs. Output Current (Tr_1)****Fig. 7 Output Voltage vs. Output Current (Tr_2)****Fig. 8 Output Voltage vs. Ambient Temperature (Tr_1)**

T-41-83

**Fig. 9 Output Voltage vs.
Ambient Temperature (T_r_2)**

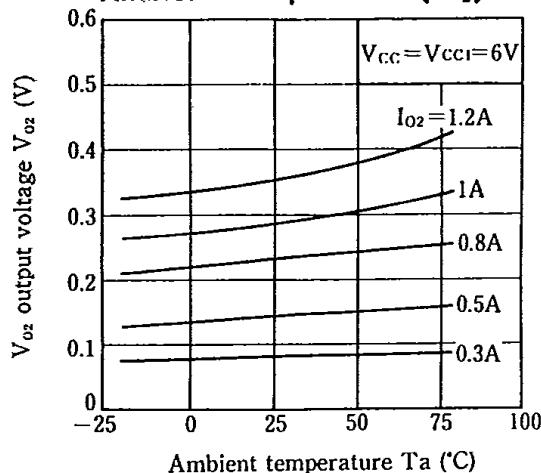
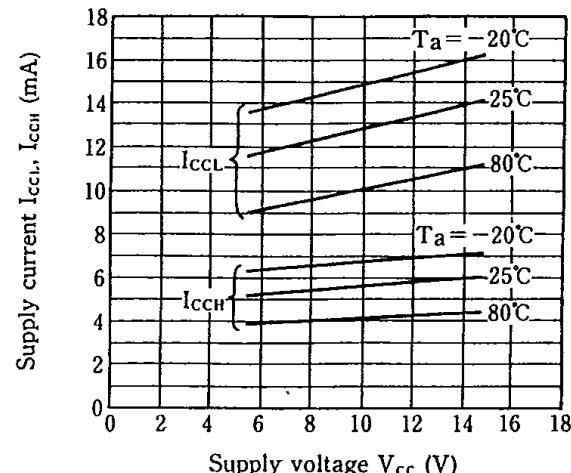
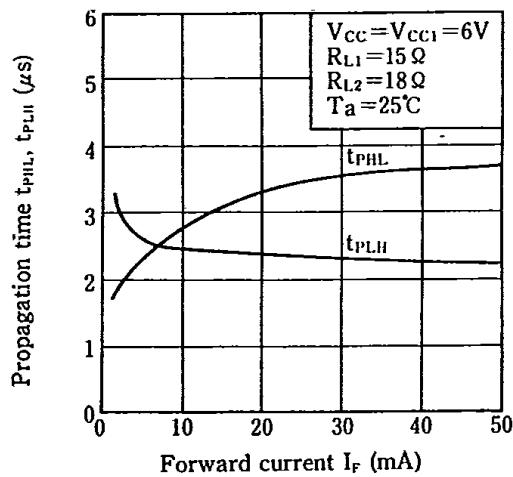



Fig. 10 Supply Current vs. Supply Voltage




**Fig. 11 Propagation Time vs.
Forward Current**



**Fig. 12 Propagation Time vs.
Ambient Temperature**

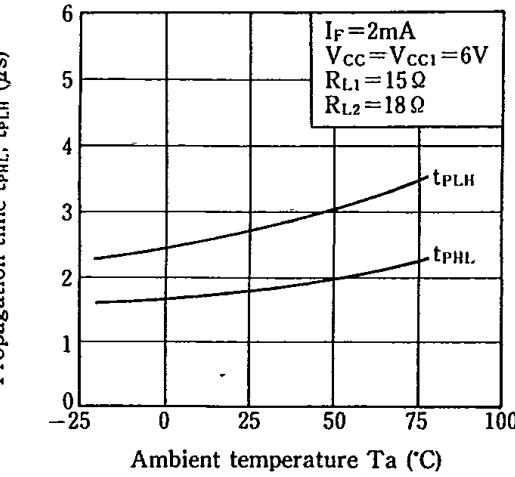

■ Application Circuit Example

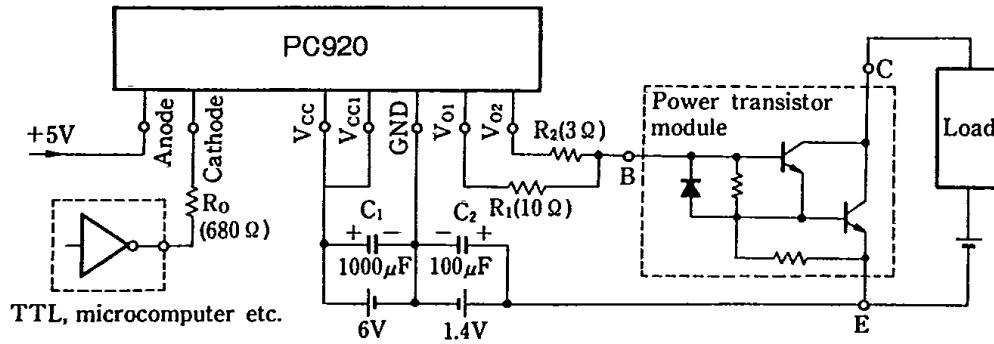

6