


# SMT POWER INDUCTORS

## Power Beads - PA131xNL Series Coupled Inductors

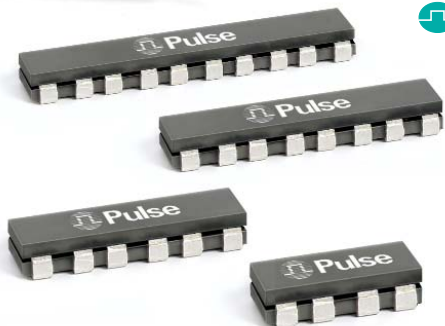

- Two, three, four and five phase Coupled Inductors for VR10/VR11 applications
- For use only with Volterra VT1105M®, VT1115M® chipsets
- **Coupled Inductors enable:**

- Output ripple current reduction due to AC magnetic field cancellation within the inductor core
- Improved efficiency due to lower peak currents
- Reduction in required output capacitance
- Faster transient response due to the ability to use lower effective inductance values
- Reduced overshoot/undershoot during load transients
- Frequency range up to 2MHz

### Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C

Pulse Part No.	Number of Coupled Phases	Equivalent <sup>1</sup> Transient Inductance per Phase (nH)	I <sub>rated</sub> <sup>2</sup> per Phase (Adc)	Magnetizing Inductance per Phase <sup>3</sup> nH ±15%, 0Adc					Magnetizing Inductance per Phase <sup>4</sup> nH MIN, 5Adc					DCR/Phase <sup>5</sup>	
				L1 (1-2)	L2 (3-4)	L3 (5-6)	L4 (7-8)	L5 (9-10)	L1 (1-2)	L2 (3-4)	L3 (5-6)	L4 (7-8)	L5 (9-10)	TYP	MAX
PA1312NL	2	50	40	300	300	-	-	-	240	240	-	-	-	0.425	0.5
PA1313NL	3	50	40	360	440	360	-	-	285	350	285	-	-		
PA1314NL	4	50	40	360	480	480	360	-	285	385	385	285	-		
PA1315NL	5	50	40	360	460	480	460	360	285	365	385	365	285		


#### NOTES:

- In a non-coupled multi-phase topology, the power supply sees the same inductance during transient and steady-state conditions. As a result, any attempt to lower the inductance to improve transient response has the negative result of increasing ripple and peak currents throughout the system during steady-state operation. However, in a coupled inductor multi-phase topology, the interaction of magnetic fields from each phase enables an overall reduction in ripple current during steady-state operation and a lower equivalent inductance during transient operation. The equivalent transient inductance per phase, as listed, represents the actual value of inductance that would be required in a non-coupled topology to realize the same transient performance. This value is achieved by core and winding geometry and is not directly measured by Pulse. For more information on the operation of the coupled inductor topology, please contact Volterra.
- The rated current per phase is based on Volterra's testing of the Pulse coupled inductors.
- The magnetizing inductance per phase is the measured inductance (at 0Adc) across each phase when all other phases are open-circuit. This inductance is a Pulse production measurement. Although the equivalent inductance per phase during steady-state is significantly higher than the equivalent transient inductance as listed, it should not be confused with the magnetizing inductance.
- The magnetizing inductance per phase is the measured inductance (at 5Adc) across each phase when all other phases are open-circuit. This inductance is a Pulse production measurement. This test is performed to verify that the inductor can withstand a phase-to-phase load imbalance of 5Adc without saturating.
- The nominal value of DCR/phase is for reference only. For production testing, the maximum limit is used.
- The VT1105M® and VT1115M® are registered trademarks of Volterra Semiconductor Corporation.



### Mechanical

### Schematic

#### PA1312NL

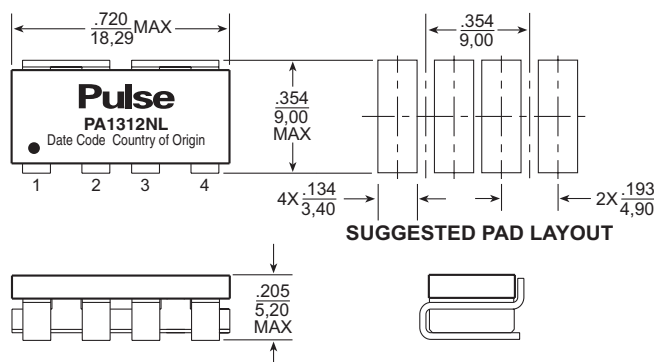

Weight ..... 3.0 grams  
 Tape & Reel ..... .650/reel  
 Tray ..... .60/tray  
 Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
 Unless otherwise specified, all tolerances are  $\pm \frac{.010}{.025}$

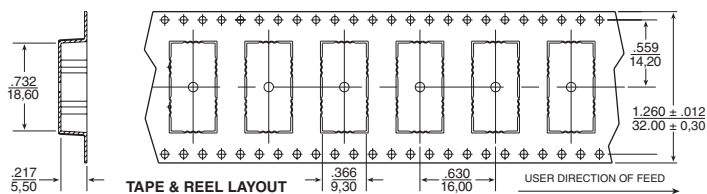

USA 858 674 8100 • UK 44 1483 401 700 • France 33 3 84 35 04 04 • Singapore 65 6287 8998 • Shanghai 86 21 32181071 • China 86 769 5538070 • Taiwan 886 2 26980228




# SMT POWER INDUCTORS

## Power Beads - PA131xNL Series Coupled Inductors



### Mechanical

### Schematic

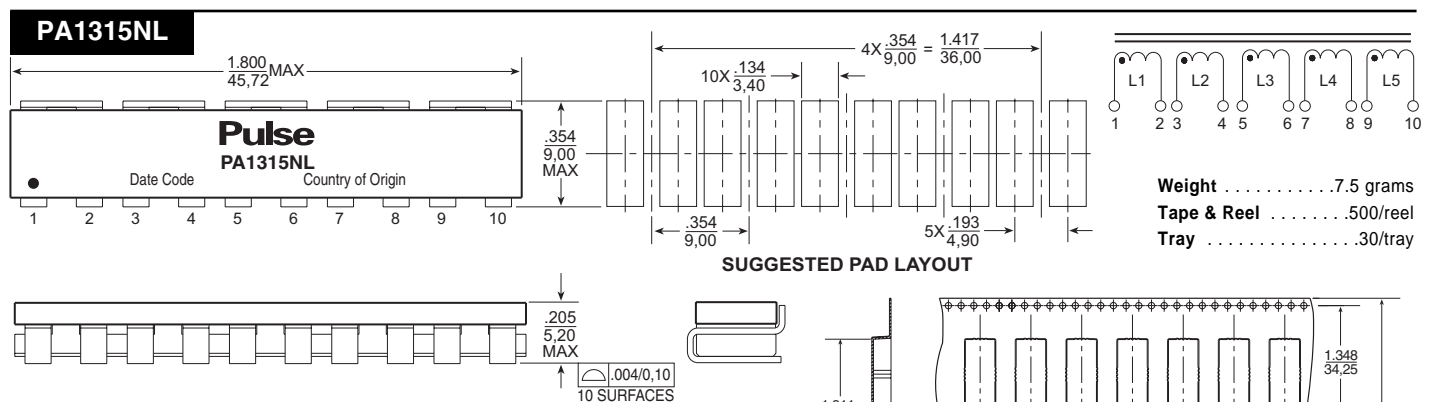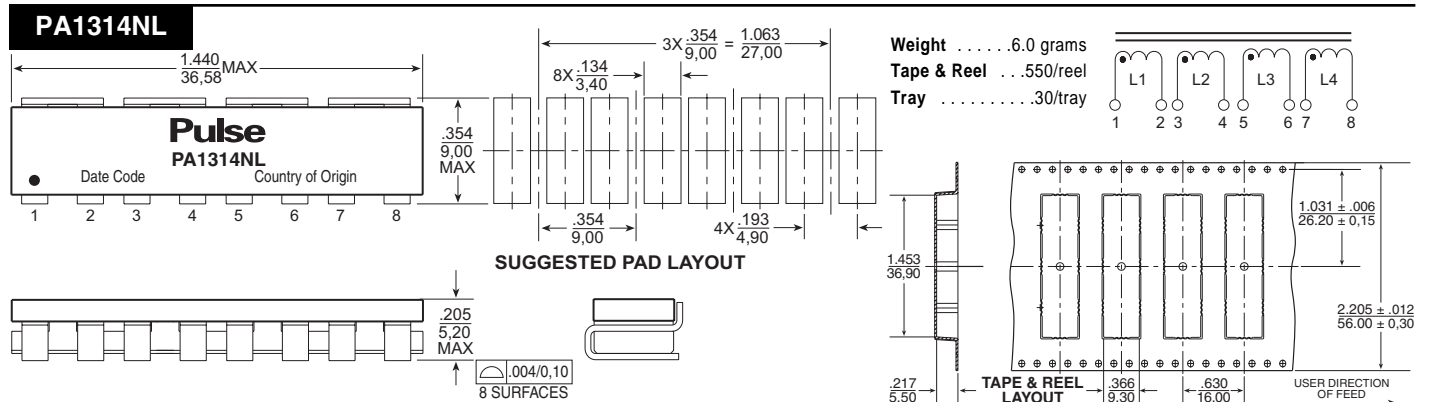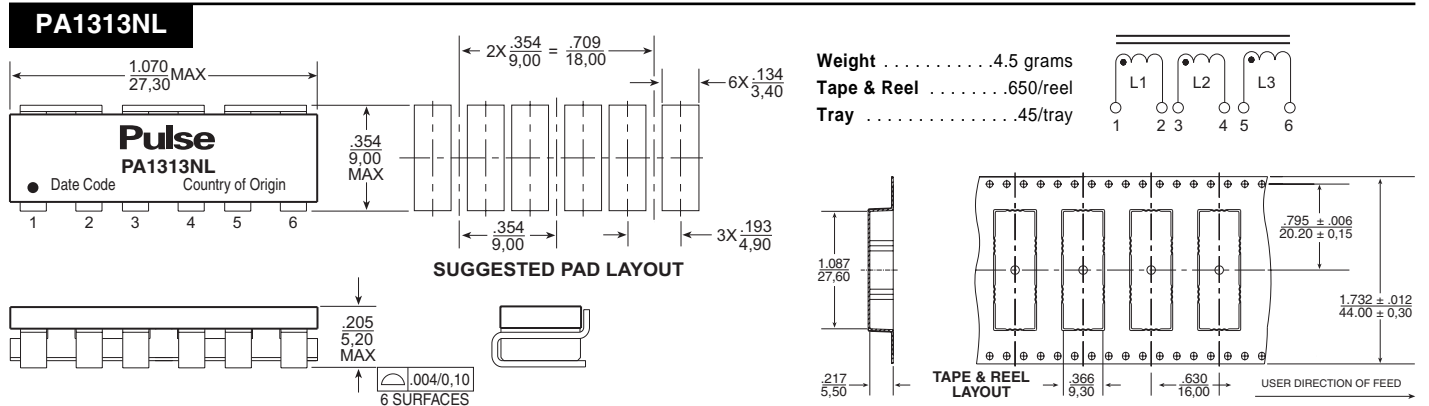

**All Part Numbers:**

**Dimensions:** Inches  
mm

Unless otherwise specified, all tolerances are ± .010 / 0,25

### For More Information:

Pulse Worldwide Headquarters	Pulse Northern Europe	Pulse Southern Europe	Pulse China Headquarters	Pulse North China	Pulse South Asia	Pulse North Asia
12220 World Trade Drive San Diego, CA 92128 U.S.A. <a href="http://www.pulseeng.com">www.pulseeng.com</a> TEL: 858 674 8100 FAX: 858 674 8262	3 Huxley Road Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	No. 1 Industrial District Changan, Dongguan China TEL: 86 769 5538070 FAX: 86 769 5538870	Room 1002 No. 819 Nanjing West Rd Shanghai China TEL: 86 21 32181071 FAX: 86 21 32181396	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 6287 8998 FAX: 65 6280 0080	3F-4, No. 81, Sec. 1 Hsin Tai Wu Road Hsi-Chih Taipei Hsien Taiwan TEL: 886 2 26980228 FAX: 886 2 26980948

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2005. Pulse Engineering, Inc. All rights reserved.

[www.pulseeng.com](http://www.pulseeng.com)

P636.A (11/05)