




REV	DATE	DESCRIPTION	BY	CHK	APP
AJ	16	REV PER EC 0814-0453-04			

- USE INSTRUCTION SHEET 1799-3
- MAXIMUM PANEL THICKNESS = 3.18 (.125)

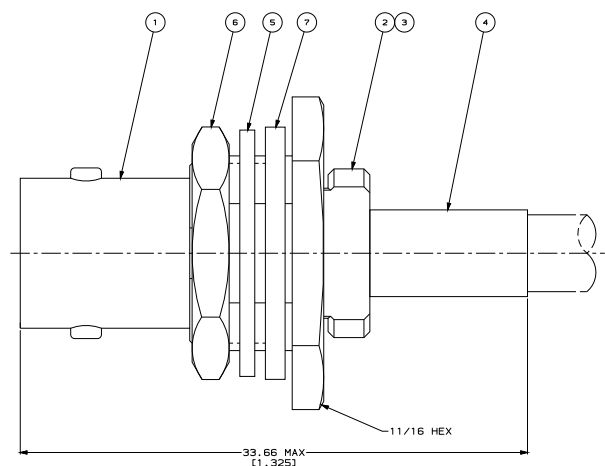

OBSOLETE	-	-	-	-	-	-	-	-	-	-	7-329456-2
OBSOLETE	-	-	-	-	-	-	-	-	-	-	7-329456-1
OBSOLETE	-	-	-	-	-	-	-	-	-	-	2-329456-3
OBSOLETE	RG-55/U, 55A/U, 55B/U, 223/U	69140-2	329633	329631	329632	329099	50793-1	2-329106-1	329800	2-329456-2	
OBSOLETE	RG-142/U, 142A/U, 142B/U	69331-1	329633	329631	329632	328663	50793-1	2-329106-1	329800	2-329456-1	
OBSOLETE	RG-58/U, 58A/U, 58B/U, 58C/U	69140-1	329633	329631	329632	328663	50793-1	2-329106-1	329800	2-329456-1	
SUPERSEDED BY 2-329456-1	-	-	-	-	-	-	-	-	-	-	329456

CABLE	CRIMP TOOL	GASKET	JAM NUT	LOCK WASHER	FERRULE	CRIMP END ASSEMBLY	GASKET	JACK ASSEMBLY, BULKHEAD	PART NUMBER
	⑦	③	⑥	⑤	④	③	②	①	
		QTY=1	QTY=1	QTY=1	QTY=1	QTY=1	QTY=1	QTY=1	

THIS DRAWING IS A CONTROLLED DOCUMENT. CONTROL POINT: MICHAEL E. CONNER

APPROVED: FRANK P. JOSEPH
 DATE: 05.41 C.0162

DESIGNED: FRANK P. JOSEPH
 DATE: 05.41 C.0162

AMP Incorporated
 Harrisburg, PA 17105-3608

JACK, BULKHEAD, BNC

SIZE: A1
 DATE CODE: 00779
 DRAWING NO: 329456

REVISION: 1
 DATE: 8.11.99