





REV.	DATE	DESCRIPTION
NC	05/06/99	INITIAL RELEASE
A	11/06/06	UPDATE DRAWING FORMAT



RECOMMENDED CABLE STRIPPING DIM'S.

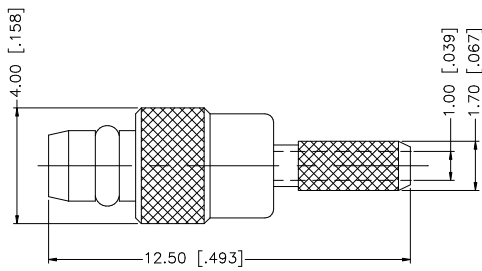

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex								
8							<b>MMCX CRIMP PLUG (FOR RG-178B/U, 196A/U CABLE)</b>								
7						PART DESCRIPTION									
6	FERRULE	COPPER	GOLD	1	DRAWN	G.R.S.					11/06/06	PART NO.			
5	RETAINER RING	PHOS. BRONZE	GOLD	1	CHECKED							262100			
4	BARREL	BRASS	GOLD	1	ISSUED							DWG. NO. 262100.DWG			
3	CONTACT PIN	BRASS	GOLD	1	SHEET	1 OF 1		REV. A SIZE A SCALE NA							
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	GOLD	1											
					CAD FILE	C:/262/262100.DWG									

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.40mm  
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 = ± 0.007"  
.315 - 1.180 = ± 0.015"  
1.180 - 4.724 = ± 0.020"