

SI-80000Z Series

Switching Voltage Regulator

Features:

- High efficiency – 90%
- High-power dissipation
- Built-in current limiter circuit
- High reliability house-made passivated power chip
- External ON-OFF control for output current
- Wide DC input voltage range

Absolute Maximum Ratings (Ta=25°C)

| Description \ Type No. | SI-80506Z | SI-81206Z | SI-81506Z | SI-82406Z | SI-80512Z | SI-81212Z | SI-81512Z | SI-82412Z | Conditions |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|
| DC Input Voltage (V) | 45 | 55 | 55 | 70 | 45 | 55 | 55 | 70 | |
| Output Current (A) | | 6.5 | | | | 12.5 | | | |
| Power Dissipation (W) | | 40 | | | | 90 | | | Tc=25°C |
| | | 5 | | | | 8 | | | No Fin |
| Thermal Resistance (°C/W) | | 2.5 | | | | 1.1 | | | |
| Junction Temperature (°C) | | | | −30~+125 | | | | | |
| Operating Temperature (°C) | | | | | −20~+90 | | | | |
| Storage Temperature (°C) | | | | −30~+125 | | | | | |

Electrical Characteristics (Ta=25°C)

| Type No. | SI-80506Z | SI-81206Z | SI-81506Z | SI-82406Z | SI-80512Z | SI-81212Z | SI-81512Z | SI-82412Z | | | | | | | | | | |
|-------------------------------------|---------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|------|--------|------|--------|------|--------|------|-----|------|
| Description | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX |
| DC Input *1 (V) | 12 | 33 | 19 | 45 | 22 | 45 | 32 | 60 | 12 | 33 | 19 | 45 | 22 | 45 | 32 | 60 | | |
| Voltage Conditions | | | | | | | | | | | | | | | | | | |
| Output Voltage | | | | | | | | | | | | | | | | | | |
| Cond. input | 4.95 | 5.05 | 5.15 | 11.8 | 12 | 12.2 | 14.8 | 15 | 15.2 | 23.8 | 24 | 24.2 | 4.95 | 5.05 | 5.15 | 11.8 | 12 | 12.2 |
| Cond. output | 20V | | 27V | | 32V | | 45V | | 20V | | 27V | | 32V | | 45V | | | |
| Output Current *2 (A) | | | | | | | | | | | | | | | | | | |
| | 3A | | | | | | | | | | | | | | | | | |
| Output Current *2 (A) | 0 | | 6 | 0 | | 6 | 0 | | 6 | 0 | | 12 | 0 | | 12 | 0 | | 12 |
| Frequency (kHz) | | | | | | | | | | | | | | | | | | |
| | 19~24 | | | | | | | | | | | | | | | | | |
| Efficiency (%) | | 72 | | 84 | | 85 | | 90 | | 68 | | 80 | | 82 | | 87 | | |
| Cond. input | 20V | | 27V | | 32V | | 45V | | 20V | | 27V | | 32V | | 45V | | | |
| Cond. output | 6A | | | | | | | | | | | | | | | | | |
| Line Regulation (mV) | | 60 | 120 | 150 | 300 | 150 | 300 | 200 | 400 | 60 | 120 | 150 | 300 | 150 | 300 | 200 | 400 | |
| Cond. input | 12~33V | | 19~45V | | 22~45V | | 32~60V | | 12~33V | | 19~45V | | 22~45V | | 32~60V | | | |
| Cond. output | 3A | | | | | | | | | | | | | | | | | |
| Load Regulation *3 (mV) | | 10 | 20 | 15 | 30 | 15 | 30 | 25 | 50 | 20 | 40 | 30 | 60 | 30 | 60 | 50 | 100 | |
| Cond. input | 20V | | 27V | | 32V | | 45V | | 20V | | 27V | | 32V | | 45V | | | |
| Cond. output | 0.5~6A | | 1~6A | | 1~6A | | 1.5~6A | | 0.5~12A | | 1~12A | | 1~12A | | 1.5~6A | | | |
| Temperature Coefficient (mV/°C) | | ±0.5 | | ±1 | | ±1 | | ±2.5 | | ±0.5 | | ±1 | | ±1 | | ±2.5 | | |
| Current Limiting Starting Range (A) | | 6.5~8 | | | | | | | | | | | | | | | | |
| | 12.5~14 | | | | | | | | | | | | | | | | | |
| Dielectric Strength | | | | | | | | | | | | | | | | | | |
| | 1 minute at AC 500V | | | | | | | | | | | | | | | | | |
| Insulation Resistance | | | | | | | | | | | | | | | | | | |
| | 50MΩ at DC 500V | | | | | | | | | | | | | | | | | |


SI-80000Z Series

Switching Voltage Regulator

- *1: The value of minimum input voltage is at $L = 100\mu H$.
 - *2: The minimum current ($I_{min.}$) is given by:
- $$I_{min.} = \frac{(V_{IN} - V_0) \cdot V_0}{2L \cdot V_{in} \cdot f}$$
- where: f is switching frequency in Hz (19,224 kHz)
- *3: Total output voltage regulation ($\Delta V_0 / V_0$) without load is tabulated as:

where ΔV_0 : Total output voltage fluctuation
 V_0 : The initial setting voltage of output


Equivalent Circuit

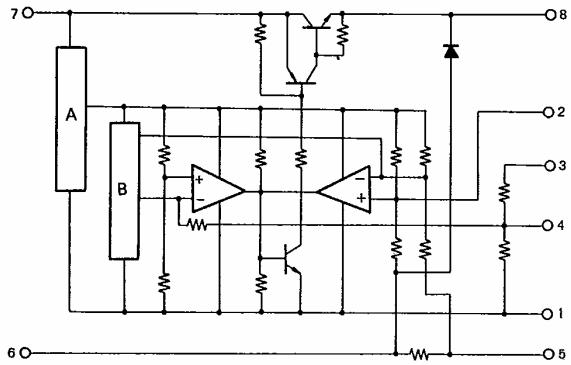


A: Reference Voltage Generator
 B: Triangle Wave Generator

Outline Drawings Unit: mm


6A

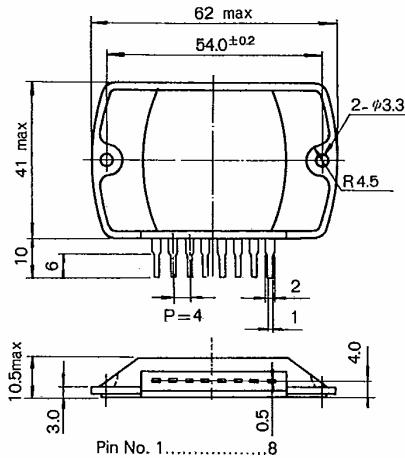


12A

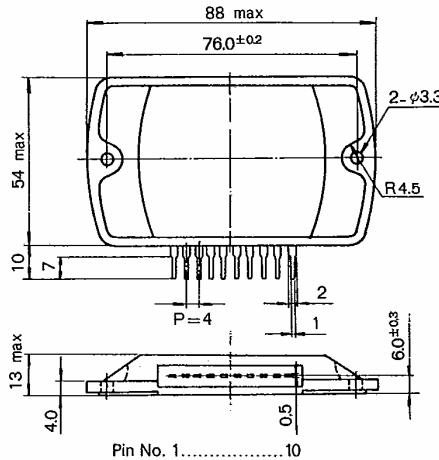


Derating (6A)

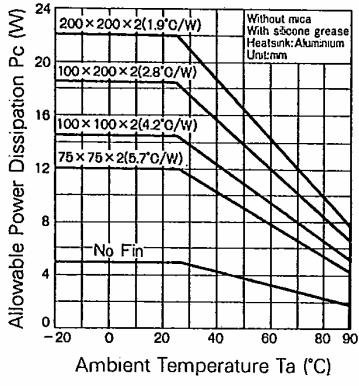

Derating (12A)

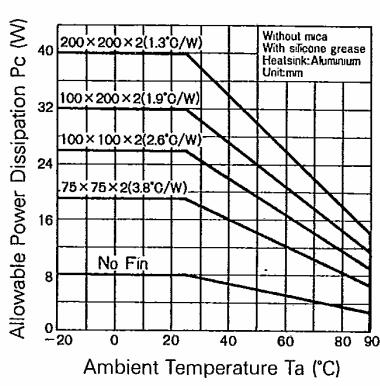

Output Voltage vs. DC Input Voltage Characteristics

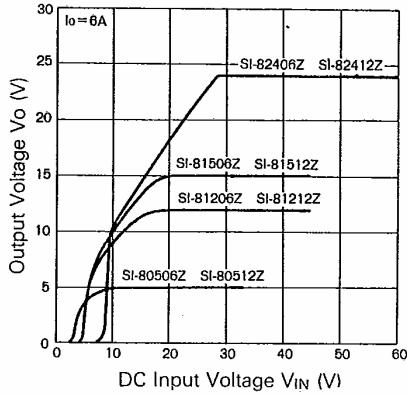


Switching Voltage Regulator




Wiring of External Components

- (1) The capacitor C₁ is to compensate voltage drop through DC input leads (This is not an AC filter capacitor). When input DC is obtained by rectification of AC, an additional filter capacitor is required.
The spacing between C₁ and the terminal 6, 7 should be less than 2cm.
When the leads between input DC source and the terminal 6 and 7 are short enough (within 5cm), C₁ can be as low as 0.1μF.
- (2) C₂ is the capacitor preventing the improper activation of short-circuit protection by the noise etc.
Sometime, you could get better regulation by changing the capacitor size (500pF~0.047μF) and wiring (2-5 to 2-1) depending on the wiring/mounting of the IC.
- (3) The capacitor C₃ is for the compensation of free-wheel reverse recovery characteristics. Noise can be reduced by employing the larger capacitor.

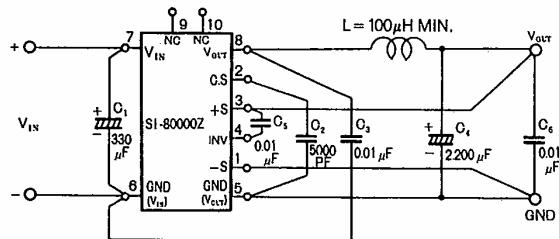

Spike noise suppression

- When the spike noise causes a problem, it can be suppressed by additional capacitors.
- 1) Install the film capacitor of 0.01 μF between pin-7 and pin-5, and also same capacitor between pin-8 and pin-5.
 - 2) Install film capacitor 0.01 μF and electrolytic capacitor of 10~47 μF in parallel with the load.

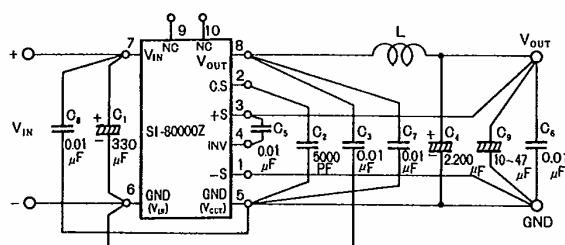

Design of Coil L and Capacitor C4

- (1) Inductance L is given by:

$$L = \frac{V_{IN} - V_0}{2I_0 (\text{MIN.})} \cdot \frac{V_0}{V_{IN}} \cdot \frac{1}{f}$$

- (2) Maximum current I_{L (max.)} is given by the following equation.

$$I_{L (\text{max.})} = \left(\frac{V_{IN} - V_0}{2L} \cdot \frac{V_0}{V_{IN}} \cdot \frac{1}{f} \right) + I_0$$

- (3) Recommended Cores

| Tohoku Metal Type No | Output Voltage Edc(V) | Rated Current Idc=(A) | ±20%f: Inductance(μH)20kHz | |
|----------------------|-----------------------|-----------------------|----------------------------|------------|
| | | | Idc=0 | Idc=Rating |
| MS-0503 | 5 | 3 | 120 | 100 |
| MS-0505 | 5 | 5 | 80 | 60 |
| MS-0510 | 5 | 10 | 40 | 30 |
| MS-0520 | 5 | 20 | 15 | 12 |
| MS-1203 | 12 | 3 | 270 | 230 |
| MS-1205 | 12 | 5 | 200 | 140 |
| MS-1210 | 12 | 10 | 130 | 70 |
| MS-2403 | 24 | 3 | 600 | 460 |
| MS-2405 | 24 | 5 | 550 | 280 |

- (4) Capacitor C₄ is given by the following equation.

$$C_4 = \frac{(V_{IN} - V_{OUT}) V_{OUT}}{8L f^2 V_{IN} \cdot \Delta V_{OUT}}$$

ΔV_{OUT}: Regulation of output voltage including load regulation and line regulation.

- (5) Ripple current of C₄ is given by the following equation.

$$I_{\text{RIPPLE}} = \frac{V_{IN} - V_0}{L} \cdot \frac{V_{OUT}}{V_{IN}} \cdot \frac{1}{f}$$

Design of Heat Sink

Power dissipation (P_c) of IC is given by the following equation:

$$P_c = \left(P_0 \frac{100}{\eta'} - 1 \right)$$

η' : Efficiency

P₀ : V × I₀

Efficiency is slightly decreased in proportion to the increase of input voltage and is given by the following equation:

$$\eta' = \eta + \alpha (V_{IN} - V'_{IN})$$

η : Rated Efficiency.

V'_{IN} : Maximum average design input voltage.

V_{IN}, α : Refer to the following table.

| Type No. | V _{IN} | α |
|----------------------|-----------------|------|
| SI-80506Z, SI-80512Z | 20 | 0.15 |
| SI-81206Z, SI-81212Z | 27 | 0.2 |
| SI-81506Z, SI-81512Z | 32 | 0.2 |
| SI-82406Z, SI-82412Z | 45 | 0.25 |


Inapplicable Operation

1. Parallel operation
2. Booster circuit

SI-80000Z Series

Switching Voltage Regulator

On-off control of output current by external signal

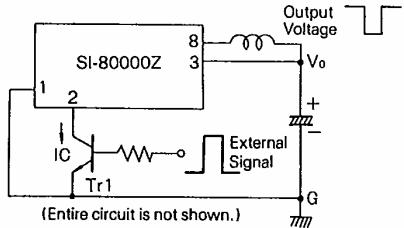


The output can be turned-off by a small signal transistor Tr1. Transistor size can be as small as $P_c \approx 100\text{mW}$.

External Connection for Split Power Supply

The following drawing shows the application of split power supply by external connection.

- 1) Each secondary winding of AC transformer should be independent.
- 2) Centertap transformer cannot be used.

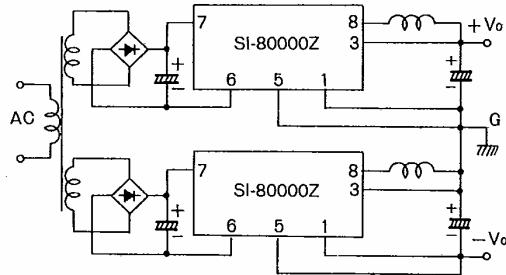

Adjustment of Current Limiting Starting Point


Current limiting starting point can be adjusted by the external resistor.

= Adjustment =

To adjust the I_{S1}

- 1) Set the output current higher than the required I_{S1} by 5% and adjust the variable resistor.
- 2) Set the output voltage about 20% lower than the setting output voltage and adjust the variable resistor.

Current Limit Starting Point

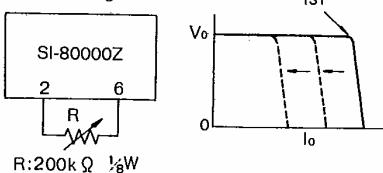


Output Voltage Adjustment


| Type No. | Output Voltage Adjustment Range | Input Voltage Adjustment Range |
|----------|---------------------------------|--------------------------------|
| 5V type | 5~25V | 12~33V |
| 12V type | 10~30V | 19~45V |
| 15V type | 10~30V | 22~45V |
| 24V type | 20~30V | 32~60V |

Remarks:

1. Required voltage difference between input and output is 8V minimum.
2. R_1 , R_2 , R_3 values are of several k Ω range.



Both "Increase" and "Decrease" of output voltage are adjustable.
The circuit shows temperature compensating function.



Output voltage can be raised.