


REV.	DATE	DESCRIPTION
NC	10/20/05	INITIAL RELEASE

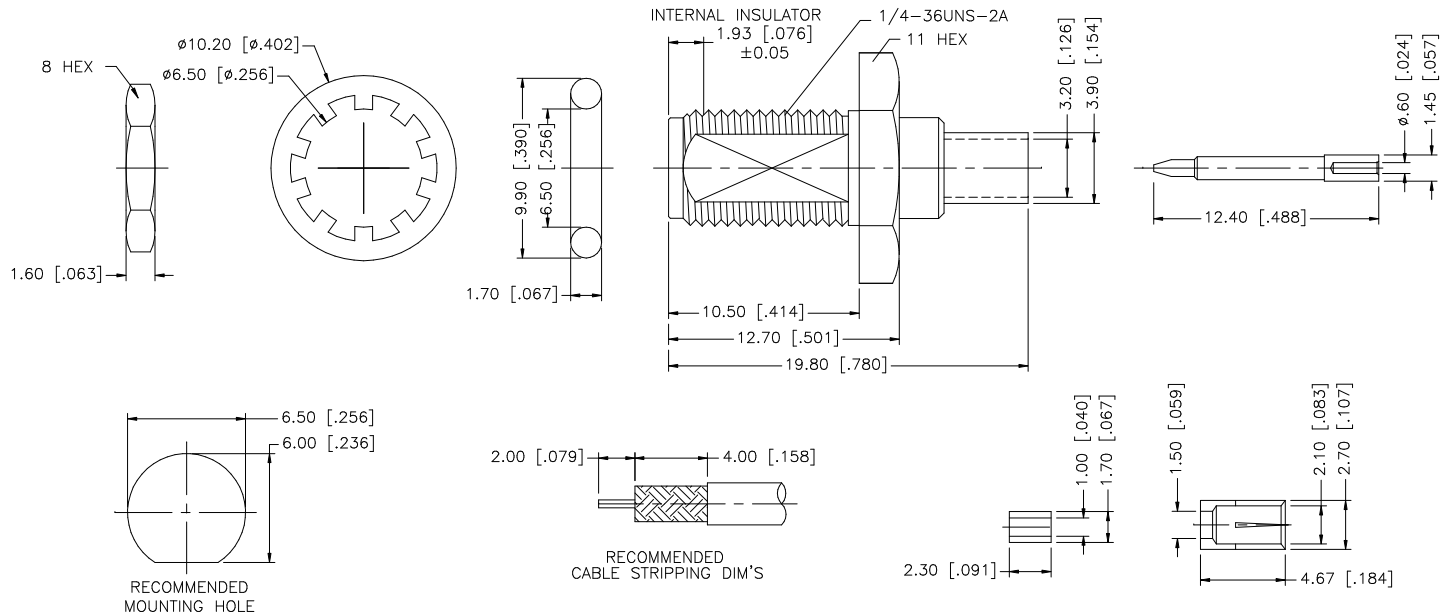

NOTES:  
 1. CRIMPED FERRULE  
 HEX CRIMP SIZE .128"  
 2. CONTACT PIN TO SOLDER.

DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	<h2 style="color: blue; margin: 0;">Amphenol Connex</h2> <p style="margin: 0;">PART DESCRIPTION  <b>SMA R/P BULKHEAD CRIMP JACK          (FOR RG-178B/U, 196A/U CABLE)</b></p> <p style="margin: 0;">PART NO.  <b>132286RP</b></p>	
8	FERRULE	BRASS	GOLD	1	DRAWN	G.R.S.		10/20/05
7	HEX NUT	BRASS	GOLD	1	CHECKED			
6	HEX NUT	BRASS	GOLD	1	ISSUED			
5	LOCK WASHER	BRASS	GOLD	1	SHEET	1 OF 1		
4	GASKET	SILICONE	RED	1	CAD FILE	C:/132/132286RP.DWG	DWG. NO. 132286RP.DWG	
3	CONTACT PIN	BRASS	GOLD	1	REV.	B	SIZE A	
2	INSULATOR	TEFLON	NATURAL	1	SCALE		NA	
1	BODY	BRASS	GOLD	1				

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
 0.5 - 8mm  $\pm 0.20$ mm  
 8 - 30mm  $\pm 0.40$ mm  
 30 - 120mm  $\pm 0.50$ mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
 .020 - .315 =  $\pm 0.007$ "  
 .315 - 1.180 =  $\pm 0.015$ "  
 1.180 - 4.724 =  $\pm 0.020$ "

DO NOT SCALE DRAWING