



No. 3979

Monolithic Linear IC

LA1883M

Single-chip FM/AM Tuner for Car Radio and Home Stereo Equipment

OVERVIEW

The LA1883M is a single-chip stereo FM/AM tuner system IC for use in car radio and home stereo equipment. It features higher performance and 30% fewer external components than current devices.

The LA1883M is a basic FM/AM tuner block on a single chip. It comprises FM front end, FM IF, MPX, noise canceller, AM and AM/FM switch.

The LA1883M operates from a 7.5 to 9.2 V supply and is available in 64-pin QIPs.


FEATURES

- Single-chip stereo FM/AM tuner
- FM front end, FM IF, MPX, noise canceller, AM and FM/AM switch
- Higher performance and 30% fewer external components than current devices.
- High FM front end to FM IF stage isolation
- 7.5 to 9.2 V supply
- 64-pin QIP

PACKAGE DIMENSIONS

Unit: mm


3159-QIP64E

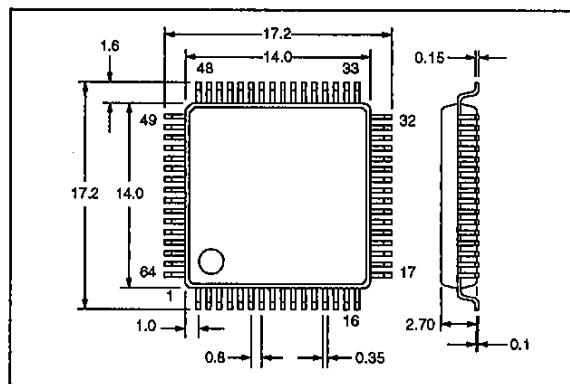

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

4212TS No. 3979-1/8

BLOCK DIAGRAM

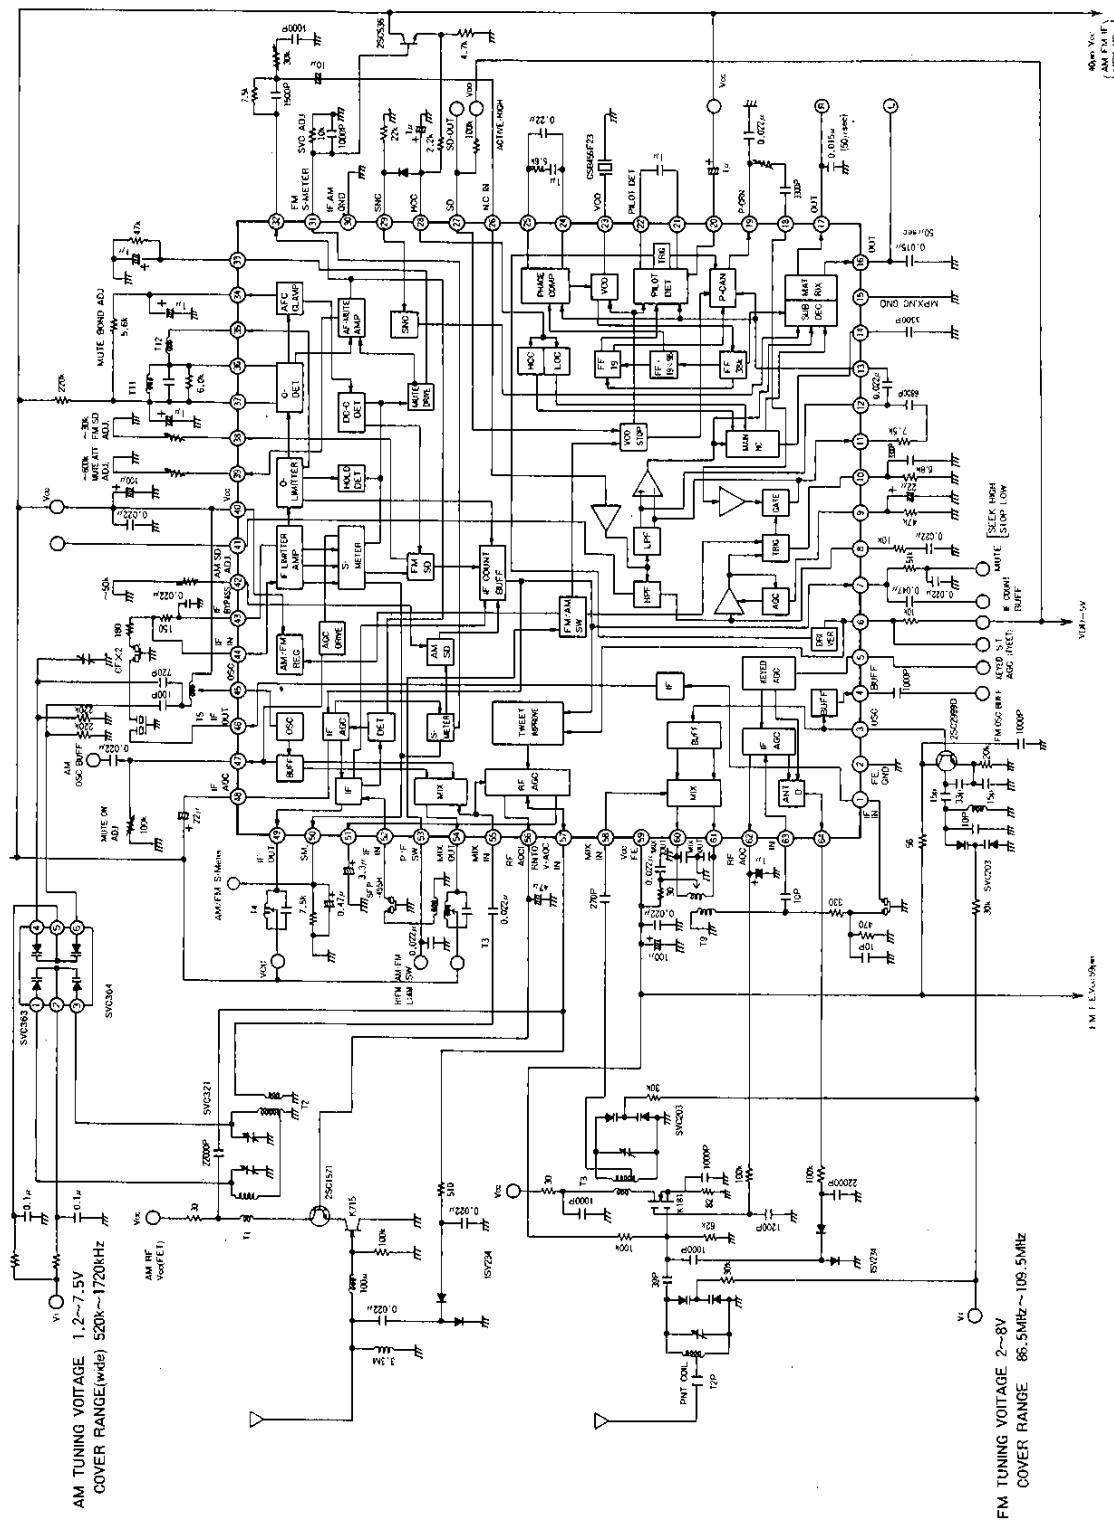

SPECIFICATIONS**Absolute Maximum Ratings**

| Parameter | Symbol | Rating | Unit |
|-----------------------------|------------------|------------|------|
| Supply voltage | V _{CC} | 9.5 | V |
| Power dissipation | P _D | 950 | mW |
| Operating temperature range | T _{OPR} | -30 to 85 | °C |
| Storage temperature range | T _{STG} | -40 to 150 | °C |

Recommended Operating ConditionsT_a = 25 °C

| Parameter | Symbol | Rating | Unit |
|---------------------------|----------------------------|------------|------|
| Supply voltage | V _{CC} | 8.5 | V |
| Supply voltage range | V _{CC} | 7.5 to 9.2 | V |
| STEREO INJ supply voltage | V _{CC STEREO INJ} | 5 | V |

Electrical Characteristics**FM IF**V_{CC} = 8.5 V, T_a = 25 °C, f_c = 10.7 MHz

| Parameter | Symbol | Condition | Rating | | | Unit |
|---|----------------------|---|--------|-----|-----|------|
| | | | min | typ | max | |
| Demodulator output voltage | V _{OFM} | f _m = 1 kHz, 100% modulation, V _I = 80 dBμ | 180 | 280 | 380 | mV |
| Channel balance | CB | f _m = 1 kHz, 100% modulation, V _I = 80 dBμ | -1 | 0 | 1 | dB |
| FM total harmonic distortion | THD _{FM} | f = 1 kHz, 100% modulation, V _I = 80 dBμ | - | 0.5 | 1.2 | % |
| Signal-to-noise ratio | S/N _{FM IF} | f = 1 kHz, 100% modulation, V _I = 80 dBμ | 68 | 75 | - | dB |
| AM suppression ratio | AMR | f = 1 kHz, f _m = 1 kHz, 30% AM modulation, V _I = 80 dBμ | 56 | 69 | - | dB |
| Muting attenuation | α _{MUTE} | f = 1 kHz, V _I = 80 dBμ. V ₃₃ changed from 0 to 2 V. | 5 | 10 | 15 | dB |
| | | f = 1 kHz, V _I = 80 dBμ. V ₃₃ changed from 0 to 4 V. | 19 | 24 | 29 | |
| Separation | SEP | See note 2. | 35 | 45 | - | dB |
| Stereo LED turn-ON pilot tone modulation | S _T ON | V ₆ < 1.5 V | 2.5 | 3.7 | 6.6 | % |

| Parameter | Symbol | Condition | Rating | | | Unit |
|---|-------------------------|---|--------|-----|-----|----------|
| | | | min | typ | max | |
| Stereo LED turn-OFF pilot tone modulation | ST _{OFF} | V ₆ < 3.5 V | 1.5 | 2.7 | - | % |
| Main channel total harmonic distortion | THD _{main} | See note 2. | - | 0.4 | 1.5 | % |
| Pilot signal cancellation level | P _{CAN} | 10% pilot signal, V _I = 80 dB μ , Pilot-level leakage DIN-AUDIO measurement | 15 | 22 | - | dB |
| SNC output voltage | V _{OSUB} | V _I = 80 dB μ , V ₃₁ = 0.1 V. See note 2. | - | - | 5 | mV |
| SNC output attenuation | α_{SNC} | V _I = 80 dB μ . V ₃₁ changed from 3.0 to 0.6 V. See note 2. | 0 | 4 | 8 | dB |
| HCC output attenuation | α_{HCC} | V _I = 80 dB μ , f = 10 kHz. V ₂₈ changed from 3.0 to 0.6 V. See note 2. | 0.5 | 4.5 | 8.5 | dB |
| | | V _I = 80 dB μ , f = 10 kHz. V ₂₈ changed from 3.0 to 0.1 V. See note 2. | 20 | 24 | 28 | |
| Input -3 dB limiting voltage | V _{LIM} | Referred to V _I = 80 dB μ . | 33 | 40 | 47 | dB μ |
| Muting sensitivity | V _{MUTE} | Unmodulated signal, V ₃₃ = 2 V | 27 | 35 | 43 | dB μ |
| SD sensitivity | SD _{SEN MPX} | Unmodulated signal, IF count buffer is ON (V > 100 mV). | 60 | 72 | 84 | dB μ |
| | | Unmodulated signal. SD is ON. | 60 | 72 | 84 | |
| IF count buffer output voltage | V _{IF BUFF FM} | Unmodulated input and output, V _{FM IF} = 100 dB μ | 170 | 260 | 400 | mV |
| S-meter output voltage | V _{SM FM} | No signal | 0 | 0.4 | 1.0 | V |
| | | V _I = 50 dB μ | 1.0 | 1.9 | 3.0 | |
| | | V _I = 70 dB μ | 1.9 | 3.4 | 5.5 | |
| | | V _I = 100 dB μ | 3.3 | 5.2 | 6.9 | |
| Muting bandwidth | BW _{MUTE} | V _I = 100 dB μ , V ₃₃ = 2 V unmodulated wideband signal | 150 | 230 | 330 | kHz |

Notes

1. Mounted in Yamaichi Electrical Industries' IC-51-0644-824 or KS8277 IC socket
2. f_I comprises 90% left and right signals, and 10% pilot signal.

FM front end $V_{CC} = 8.5 \text{ V}$, $T_a = 25 \text{ }^{\circ}\text{C}$

| Parameter | Symbol | Condition | Rating | | | Unit |
|-------------------------------------|---------------------|--|--------|-----|-----|----------------|
| | | | min | typ | max | |
| RF AGC turn-ON input voltage | V_{AGC} | $V_{64} = 0.7 \text{ V}$ | 65 | 72 | 79 | $\text{dB}\mu$ |
| Conversion voltage gain | A_V | $V_{MIX IN} = 70 \text{ dB}\mu$ at 98 MHz with no modulation | 74 | 118 | 187 | mV |
| OSC BUFF output voltage | $V_{OSC\ BUFF\ FM}$ | No signal, $f_{osc} = 108.7 \text{ MHz}$, $V_t = 4.6 \text{ V}$ | 130 | 200 | 270 | mV |
| FM section quiescent supply current | I_{CCOFM} | No signal. $I_{40} + I_{49} + I_{54} + I_{60} + I_{61}$ | 54 | 77 | 95 | mA |

Noise canceller $V_{CC} = 8.5 \text{ V}$, $T_a = 25 \text{ }^{\circ}\text{C}$

| Parameter | Symbol | Condition | Rating | | | Unit |
|-------------------|---------------|---|--------|-----|-----|---------------|
| | | | min | typ | max | |
| Gate time | τ_{GATE} | $V_{NC\ IN} = 100 \text{ mV}$ peak at $f = 1 \text{ kHz}$, $1 \mu\text{s}$ pulse | 15 | 25 | 35 | μs |
| Noise sensitivity | N_{SEN} | 1 kHz, $1 \mu\text{s}$ pulse input level when noise canceller is ON | - | - | 30 | mV_p |


AM $V_{CC} = 8.5 \text{ V}$, $T_a = 25 \text{ }^{\circ}\text{C}$, $f_{AM\ ANT} = 1 \text{ MHz}$ unless otherwise noted

| Parameter | Symbol | Condition | Rating | | | Unit |
|---------------------------|---------------------|--|--------|-----|-----|-------------|
| | | | min | typ | max | |
| Usable sensitivity | S | $V_{AM\ ANT} = 27 \text{ dB}\mu$, $f_m = 1 \text{ kHz}$, 30% modulation | 16 | 20 | - | dB |
| Detector output voltage | V_{OAM} | $V_{AM\ ANT} = 74 \text{ dB}\mu$, $f_m = 1 \text{ kHz}$, 30% modulation | 85 | 120 | 170 | mV |
| AGC figure-of-merit | V_{AGCFOM} | Referred to $V_{AM\ ANT} = 74 \text{ dB}\mu$, change in input required for output to fall 10 dB | 52 | 57 | 62 | dB |
| Signal-to-noise ratio | S/N_{AM} | $V_{AM\ ANT} = 74 \text{ dB}\mu$, $f_m = 1 \text{ kHz}$, 30% modulation | 45 | 50 | - | dB |
| Total harmonic distortion | THD_{AM} | $V_{AM\ ANT} = 74 \text{ dB}\mu$, $f_m = 1 \text{ kHz}$, 80% modulation | - | 0.4 | 1.0 | % |
| S-meter output voltage | $V_{SM\ AM}$ | No signal | - | 0 | 0.3 | V |
| | | $V_{AM\ ANT} = 100 \text{ dB}\mu$, unmodulated | 3.3 | 4.7 | 7.0 | |
| OSC BUFF output voltage | $V_{OSC\ BUFF\ AM}$ | No signal | 310 | 370 | - | mV |

LA1883M

| Parameter | Symbol | Condition | Rating | | | Unit |
|---|-------------------------|---|--------|-----|-----|----------|
| | | | min | typ | max | |
| Wideband-AGC sensitivity | W-AGCSEN | f _{AM ANT} = 1.4 MHz, V _{S7} = 0.7 V | 93 | 99 | 105 | dB μ |
| SD antenna input level sensitivity | SDSEN AM | IF count output is ON. | 23 | 30 | 37 | dB μ |
| | | SD is ON. | 23 | 30 | 37 | |
| Tweet reduction circuit antenna input level sensitivity | TweetSEN | N ₆ = 0 V, AGC ON input | 50 | 56 | 62 | dB μ |
| IF BUFF output voltage | V _{IF BUFF AM} | V _{AM ANT} = 74 dB μ , unmodulated | 200 | 260 | - | mV |

Measurement Circuit

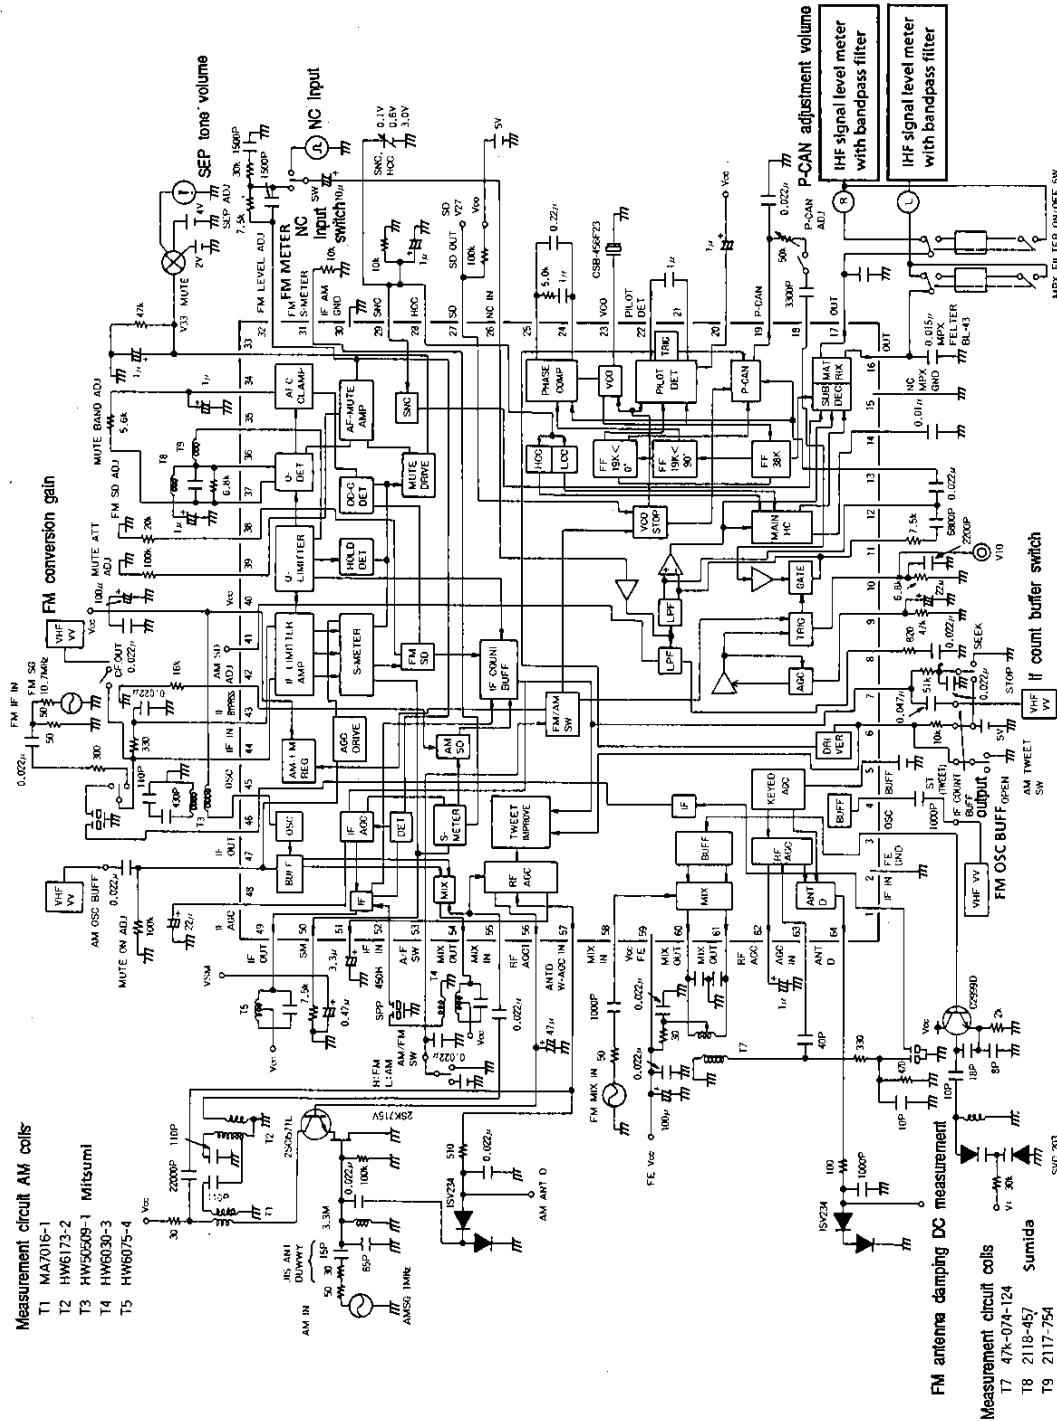

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.