


REV.	DATE	ECR NO.	DESCRIPTION
A	04/31/03	-	UPDATE DRAWING FORMST
B	11/13/06	-	MODIFY BARREL OD. TO 2.70mm
C	04/27/08	100011	REVISE FERRULE I.D. TO 3.20mm AND O.D. TO 3.9mm

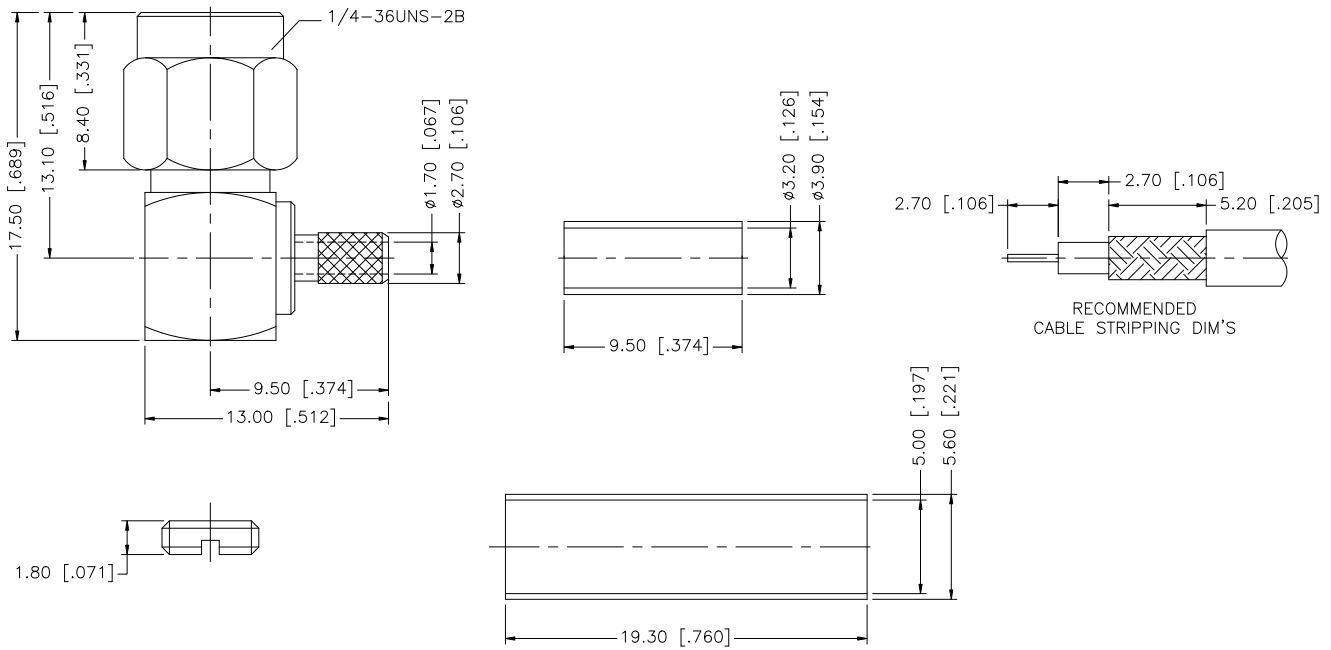

NOTES:  
1. CRIMPED FERRULE HEX CRIMP SIZE .128"

				APPROVALS	DATE	<h1 style="text-align: center;">Amphenol Connex</h1>					
8				DRAWN	G.R.S.					04/27/08	<b>PART DESCRIPTION</b> SMA R/A CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U CABLE)
7	HEAT SHRINK TUBE		1	CHECKED			<b>PART NO.</b> 132123				
6	FERRULE	COPPER	GOLD	1	ISSUED						<b>DWG. NO.</b> 132123.DWG
5	GASKET	SILICONE	RED	1	SHEET	1 OF 1	<b>REV.</b> C <b>SIZE</b> A <b>SCALE</b> NA				
4	CONTACT PIN	BRASS	GOLD	1	CAD FILE						C:/132/132123.DWG
3	INSULATOR	TEFLON	NATURAL	1			DO NOT SCALE DRAWING				
2	HOUSING W/BARREL	BRASS	GOLD	1							
1	SHELL	BRASS	GOLD	1							

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
 0.5 - 8mm ± 0.20mm  
 8 - 30mm ± 0.40mm  
 30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
 .020 - .315 = ± 0.007"  
 .315 - 1.180 = ± 0.015"  
 1.180 - 4.724 = ± 0.020"