


REV.	DATE	DESCRIPTION
A	01/25/04	UPDATE DRAWING FORMAT

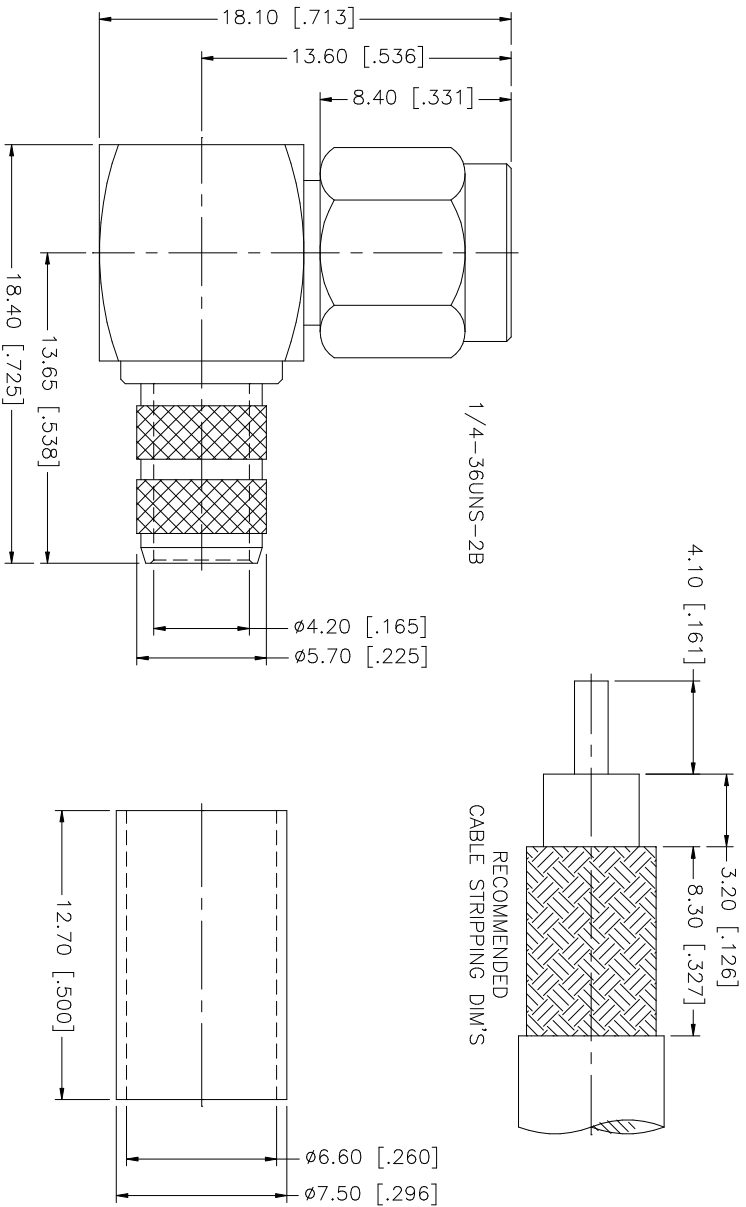

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .255"

8	DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE	APPROVALS	DATE	PART DESCRIPTION					
7						0.5 - 8mm ± 0.20mm	0.020 - 0.315 = ± 0.007"	DRAWN	G.R.S.	01/25/04	SMA R/A CRIMP PLUG (FOR RG-8X, LMR-240)				
6	FERRULE	COPPER	GOLD	1		8 - 30mm ± 0.40mm	.020 - .315 = ± 0.007"	CHECKED							
5	COVER	BRASS	GOLD	1		30 - 120mm ± 0.50mm	.315 - 1.180 = ± 0.015"	ISSUED							
4	CONTACT PIN	BRASS	GOLD	1			1.180 - 4.724 = ± 0.020"	SHEET	1 OF 1						
3	INSULATOR	TEFLON	NATURAL	1				CAD FILE							
2	BODY	BRASS	GOLD	1				C:/132/132239.DWG							
1								DWG. NO.	132239.DWG	REV.	A	SIZE	A	SCALE	NA

Amphenol Connex

SMA R/A CRIMP PLUG
(FOR RG-8X, LMR-240)

132239