



### 3 Phase Contactor AC Input

40-50 Amp  
280/600 VAC

PATENT PENDING

- Combined SSR and EMR advantages
- Lifetime >2 million operations @ full load
- No heat sink required
- Input status LED indicator
- Wire, lug or quick connect termination
- DP contactor footprint
- CE compliant & UL/cUL recognized



### 3 Phase Contactor DC Input

40-50 Amp  
120/240 VAC

PATENT PENDING

- Combined SSR and EMR advantages
- Lifetime >2 million operations @ full load
- No heat sink required
- DC logic compatible input
- Input status LED indicator
- Wire, lug or quick connect termination
- DP contactor footprint
- CE compliant & UL/cUL recognized

#### CONTROL SPECIFICATIONS<sup>①</sup>

| Control Voltage Suffix         | E                     | F                       | G                       |
|--------------------------------|-----------------------|-------------------------|-------------------------|
| Coil Voltage Range             | 20 - 26 VAC, 50/60 Hz | 100 - 130 VAC, 50/60 Hz | 208 - 240 VAC, 50/60 Hz |
| Min. Turn-On Voltage           | 20 VAC                | 100 VAC                 | 208 VAC                 |
| Min. Turn-Off Voltage          | 12 VAC                | 24 VAC                  | 48 VAC                  |
| Coil Power Consumption, Inrush | 56 VA @ 24 VAC        | 56 VA @ 120 VAC         | 56 VA @ 220 VAC         |
| Coil Power Consumption, Sealed | 6.6 VA @ 24 VAC       | 6.6 VA @ 120 VAC        | 6.6 VA @ 220 VAC        |
| Coil Terminals                 | 10 in lb (1.13 Nm)    | 10 in lb (1.13 Nm)      | 10 in lb (1.13 Nm)      |

#### OUTPUT SPECIFICATIONS<sup>①</sup>

| Voltage suffix   | 28  |  | 60  |  |
|--|---|--|---|--|
|  | 24 - 280 VAC  |  | 48 - 600 VAC  |  |
| Operating Voltage (50/60Hz)                                |   |  |   |  |
| Maximum Off-State Leakage Current per channel <sup>②</sup> | 0.05 mA @ 240 VAC   |  | 0.06 mA @ 480 VAC   |  |
| Load Current suffix  | 40  |  | 50  |  |
| Maximum Load Current per Phase @ 40°C <sup>②</sup>         | 40 A Resistive  |  | 50 A Resistive  |  |
| Power terminals / wire range                               | Dual quick connect and Binder head screws / AWG#14 - AWG#8 18 in lbs (2.1 Nm) |  | Dual quick connect and Box lugs / AWG#14 - AWG#6 25 in lbs (2.9 Nm) |  |
| Screw torque requirements                                  |   |  |   |  |

#### GENERAL SPECIFICATIONS<sup>①</sup>

|   |                                 |
|---|---------------------------------|
| Input to Output Dielectric Isolation  | 4000 VAC                        |
| Input/Output to Ground Dielectric Isolation   | 2500 VAC                        |
| Contacts (Double Break) <sup>③</sup>  | Three Normally Open             |
| Ambient Operating Temperature Range <sup>④</sup>                                    | -20°C to 75°C                   |
| Ambient Storage Temperature Range   | -40°C to 100°C                  |
| Max. Turn-On Time   | 16.6 ms @ 60 Hz / 20 ms @ 50 Hz |
| Max. Turn-Off Time  | 32 ms @ 60 Hz / 40 ms @ 50 Hz   |
| Maximum Number of Operations per Minute   | 30 operations per min           |
| Lifetime @ Rated Load Current, 40°C ambient temp, 30 operations/min, Rated Vcontrol | > 2 Million operations          |
| Weight (typical)  | 540 grs (1.19 lb)               |

① Specifications @ 25°C unless otherwise noted.

② See Derating Curves for additional operational conditions.

③ The RHP includes a Solid-State Relay. Therefore, the output is never completely open.

④ The RHP includes an overtemperature protection for the Solid-State Module.

#### CONTROL SPECIFICATIONS<sup>①</sup>

| Control Voltage Suffix | D5                  | D12                 | D24                 |
|------------------------|---------------------|---------------------|---------------------|
| Control Voltage Range  | 4.5 - 5.5 VDC       | 10 - 15 VDC         | 22 - 27 VDC         |
| Max. Reverse Voltage   | -5.5 VDC            | -15.5 VDC           | -27.5 VDC           |
| Min. Turn-On Voltage   | 4.5 VDC             | 9.5 VDC             | 9.5 VDC             |
| Min. Turn-Off Voltage  | 1 VDC               | 2 VDC               | 2 VDC               |
| Input Current          | 12mA @ 5 VDC        | 12mA @ 12 VDC       | 12mA @ 24 VDC       |
| Input Connector        | 5.31 in lb (0.6 Nm) | 5.31 in lb (0.6 Nm) | 5.31 in lb (0.6 Nm) |

#### OUTPUT SPECIFICATIONS<sup>①</sup>

| Voltage suffix   | 12  |  | 24  |  |
|--|---|--|---|--|
|  | 100 - 120 VAC   |  | 208 - 240 VAC   |  |
| Operating Voltage (50/60Hz)                                |   |  |   |  |
| Maximum Off-State Leakage Current per channel <sup>②</sup> | 0.05 mA @ 120 VAC   |  | 0.06 mA @ 240 VAC   |  |
| Load Current suffix  | 40  |  | 50  |  |
| Maximum Load Current per Phase @ 40°C <sup>②</sup>         | 40 A Resistive  |  | 50 A Resistive  |  |
| Power terminals / wire range                               | Dual quick connect and Binder head screws / AWG#14 - AWG#8 18 in lbs (2.1 Nm) |  | Dual quick connect and Box lugs / AWG#14 - AWG#6 25 in lbs (2.9 Nm) |  |
| Screw torque requirements                                  |   |  |   |  |

#### GENERAL SPECIFICATIONS<sup>①</sup>

|   |                                 |
|---|---------------------------------|
| Input to Output Dielectric Isolation  | 4000 VAC                        |
| Input/Output to Ground Dielectric Isolation   | 2500 VAC                        |
| Contacts (Double Break) <sup>③</sup>  | Three Normally Open             |
| Ambient Operating Temperature Range <sup>④</sup>                                    | -20°C to 75°C                   |
| Ambient Storage Temperature Range   | -40°C to 100°C                  |
| Max. Turn-On Time   | 16.6 ms @ 60 Hz / 20 ms @ 50 Hz |
| Max. Turn-Off Time  | 32 ms @ 60 Hz / 40 ms @ 50 Hz   |
| Maximum Number of Operations per Minute   | 30 operations per min           |
| Lifetime @ Rated Load Current, 40°C ambient temp, 30 operations/min, Rated Vcontrol | > 2 Million operations          |
| Weight (typical)  | 540 grs (1.19 lb)               |


① Specifications @ 25°C unless otherwise noted.

② See Derating Curves for additional operational conditions.



③ The RHP includes a Solid-State Relay. Therefore, the output is never completely open.

④ The RHP includes an overtemperature protection for the Solid-State Module.

#### Part Number Nomenclature

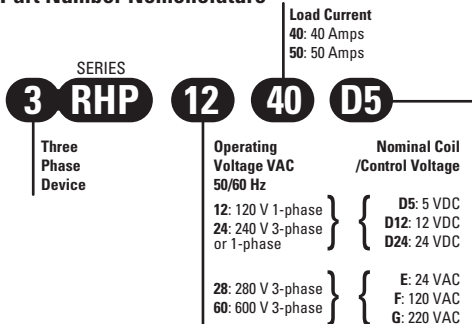


#### Derating Curves

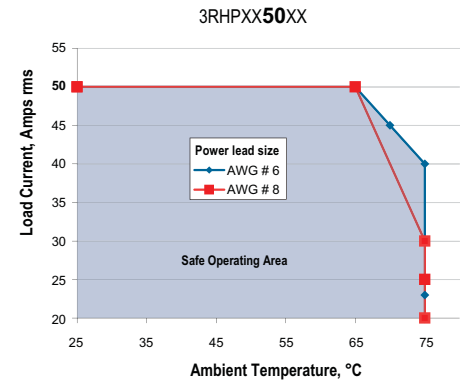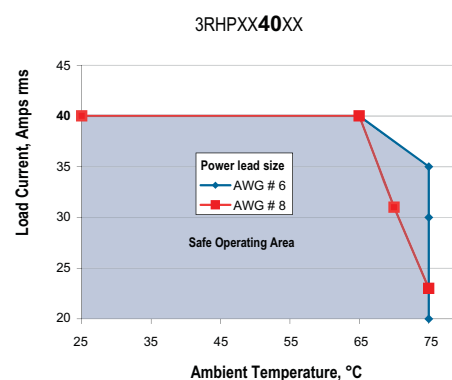

### Typical Electrical Connection for 3 Phase Applications<sup>Ⓞ</sup>




(For output voltage options 24, 28, 60)

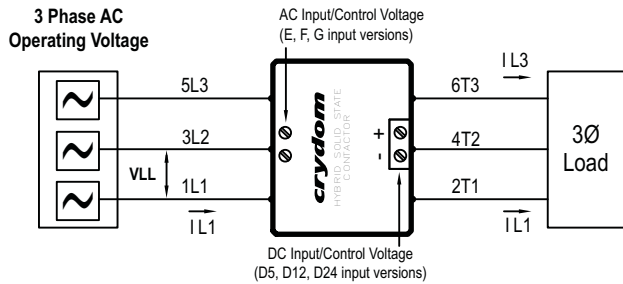

DO NOT apply any AC voltage to contactor coil connections, for DC versions only.

### Optional Electrical Connections for Single Phase Applications<sup>Ⓞ</sup>

(For output voltage options 12, 24, 28, 60)

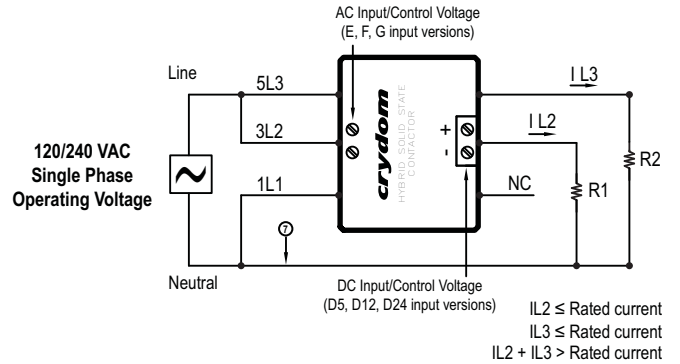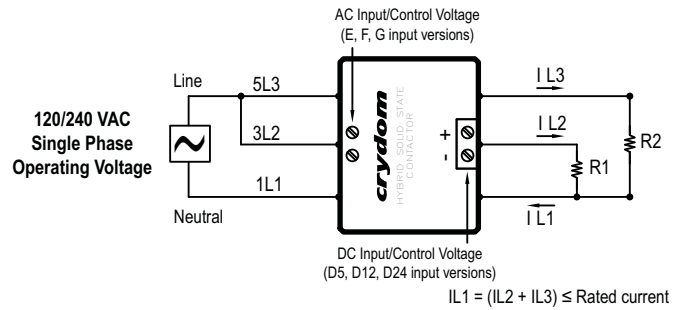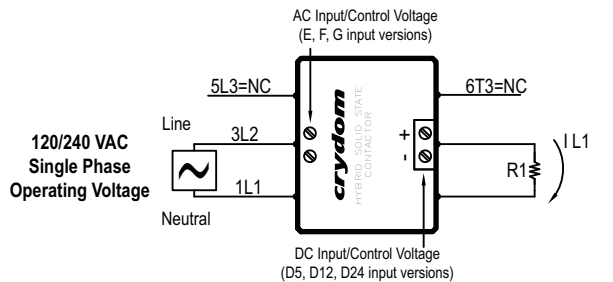

- Ⓞ Match VLL to voltage suffixes 28 & 60 for options E, F & G and 12 & 24 for options DX.
- Ⓞ The single phase supply voltage must be wired to terminal 1L1 and 3L2 for proper single phase operation.
- Ⓞ In applications switching two single phase loads (R1 and R2) where the combined load current exceeds the contactor's rating (40 or 50 Amps) the return/neutral lead must not be wired through the contactor (see above drawing).

## ⚠ DANGER / PELIGRO / DANGER /GEFAHR / PERICOLO / PERIGO

### HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH.

- Disconnect all power before installing or working with this equipment.
- Verify all connections and replace all covers before turning on power.

Failure to follow these instructions will result in death or serious injury.

### RIESGO DE DESCARGA ELECTRICA O EXPLOSION.

- Desconectar todos los suministros de energia a este equipo antes de trabajar con este equipo.
- Verificar todas las conexiones y colocar todas las tapas antes de energizar el equipo.

El incumplimiento de estas instrucciones puede provocar la muerte o lesiones serias.

### RISQUE DE DESCARGE ELECTRIQUE OU EXPLOSION

- Eteindre toutes les sources d'énergie de cet appareil avant de travailler dessus de cet appareil
- Vérifier tous connections, et remettre tous couverts en place avant de mettre sous

De non-suivi de ces instructions provoquera la mort ou des lésions sérieuses.

### GEFAHR EINES ELEKTRISCHE N SCHLAGES ODER EINER EXPLOSION.

- Stellen Sie jeglichen Strom ab, der dieses Gerät versorgt, bevor Sie an dem Gerät Arbeiten durchführen
- Vor der Inbetriebnahme alle Anschlüsse überprüfen und alle Gehäuseteile montieren.

Unterlassung dieser Anweisungen können zum Tode oder zu schweren Verletzungen führen.

### RISCHIO DI SCOSSA ELETTRICA O DELL'ESPLOSIONE.

- Spenga tutta l'alimentazione e che fornisce questa apparecchiatura prima del lavorare a questa apparecchiatura
- Verificare tutti i collegamenti e sostituire tutte le coperture prima della rotazione sull'alimentazione

L'omissione di seguire queste istruzioni provocherà la morte o di lesioni serie

### RISCO DE DESCARGA ELÉTRICA OU EXPLOÇÃO

- Desconectar o equipamento de toda a energia antes de instalar ou trabalhar com este equipamento
- Verificar todas as conexões e recolocar todas as tampas antes de religar o equipamento

O não cumprimento destas instruções pode levar a morte ou lesões sérias.