


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
F	LN	DESCRIPTION	DATE	BY
BD	0			
	AB	REVISED PER ECO-09-015488	06/JUL/09	HMR GS

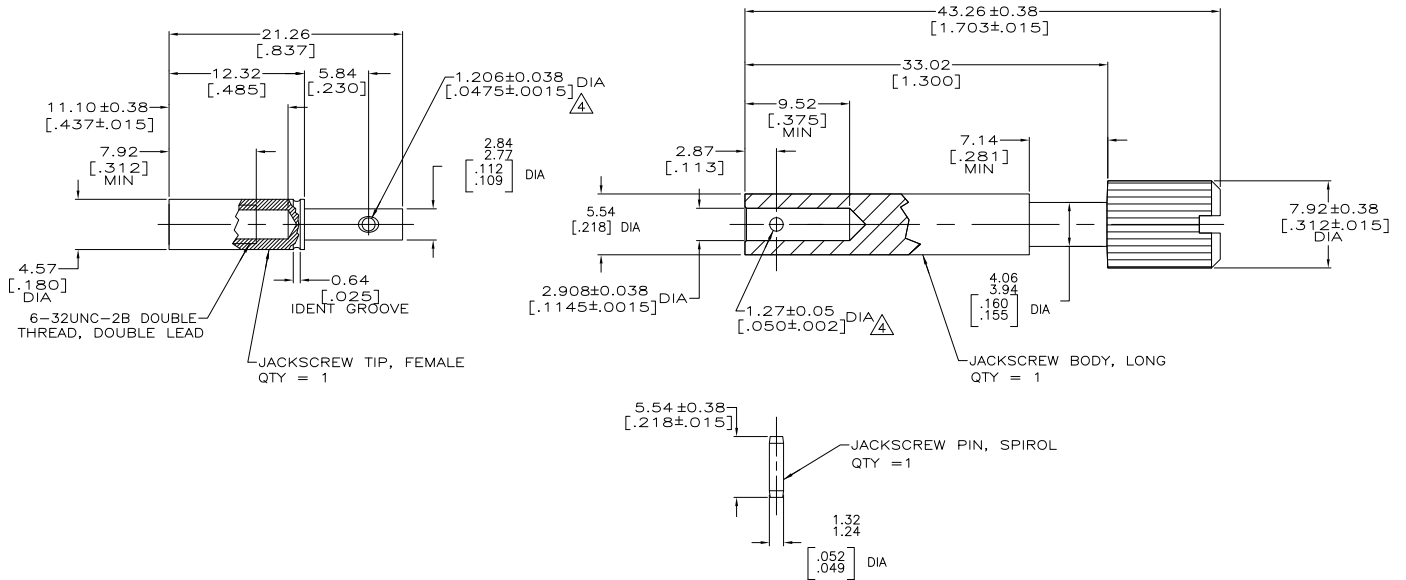

- 1 ZINC.
- 2 STAINLESS STEEL.
- 3 TO ASSEMBLE JACKSCREW REFER TO INSTRUCTION SHEET #1189.
- 4 HOLE CENTRALLY LOCATED WITHIN ±.007[.003] OF THE 5.54[.218] DIA AND THE 2.77/2.84 [.109/.112] DIA CENTER LINES.
- 5 CHROMATE CONVERSION, CLEAR.
- 6 NON-HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.

NOTES	PART NUMBER
1	1-200867-1
2	200867-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW: K. KOLTZ 06/19/04	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK: R. STONE 06/16/04	JACKSCREW KIT, UNASSEMBLED, FEMALE, M SERIES	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD: -	RESTRICTED TO	
0 PLG	±	PRODUCT SPEC	SIZE	CAGE CODE
1 PLG	±	APPLICATION SPEC	A2	00779
2 PLG	±	WEIGHT	C=	200867
3 PLG	± 0.13 (.005)	CUSTOMER DRAWING	SCALE	4:1
4 PLG	±		SHEET	1 of 1
ANGLES	±		REV	AB
MATERIAL: JACKSCREW BODY: 2	FINISH: JACKSCREW BODY: 5			
JACKSCREW TIP: 1	JACKSCREW PIN: 3			

AMP 1471-9 REV 31MM2000

200867

A