

4


3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
H	-	F	LR	DESCRIPTION	DATE	BY	APPD
		F		ECR-05-005975	30-JUN-04	BM	JB
		G		ECR-10-019054	15SEP10	DP	MQW

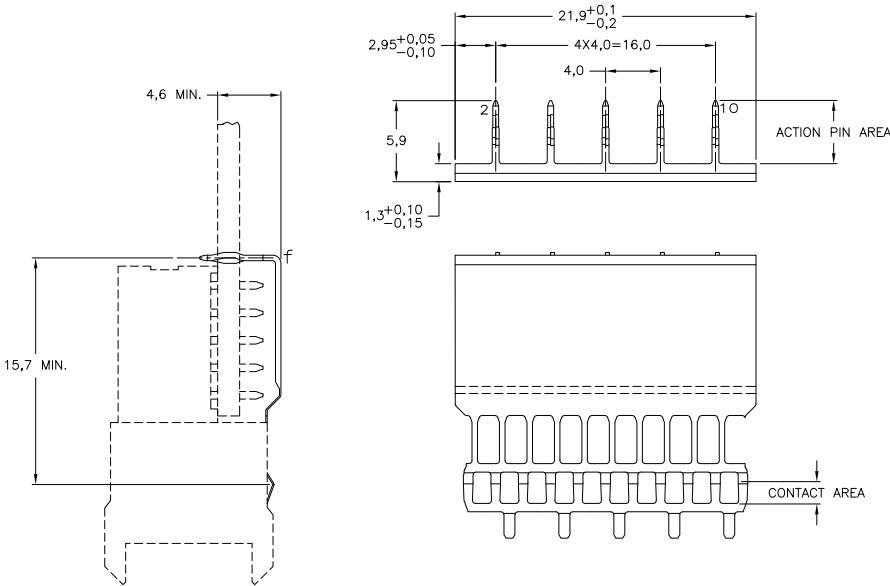

NOTES:

- ⚠ PLATING:
 CONTACT AREA: 0,76µm Au MIN. OVER 1,27µm Ni MIN.
 ACTION PIN : 0,5µm SnPb MIN.
 REMAINDER : Ni
- ⚠ MATERIAL: PHOSPHORBRONZE.
- ⚠ ROW "f" 5 PLATED THROUGH HOLES FOR LOWERSHIELD.
- ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE C WITH
 UPPERSHIELD, 55+6 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 5 MAX. BOARD THICKNESS 3,5 mm.
- ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
 TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.

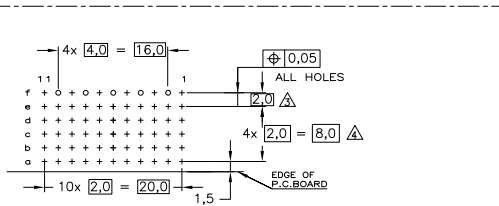

COMPONENT SIDE AS SHOWN
 RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
 FOR DETAILS SEE
 APPLICATION SPECIFICATION

FINISH	MATERIAL	PARTNUMBER
⚠	⚠	352112-9
⚠	⚠	352112-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR D. TRUJEN	28-11-98	Tyco Electronics Corporation	
DIMENSIONS: mm		CHK v.d. HEIJDEN	28-11-98	's-Hertogenbosch, 5222AR-32	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APD F. v. KONINGSBRUGGE		Tyco Electronics	
0-PLD ±0,2		NAME		Z-PACK 2mm HM	
1-PLD ±0,2		PRODUCT SPEC	108-19082	GROUND RETURN LOWER SHIELD	
2-PLD ±0,2		APPLICATION SPEC	114-19029	TYPE C/M	
3-PLD ±0,2		SIZE	A2	QAGE CODE	DRAWING NO
4-PLD ±0,2		WEIGHT		C=352112	RESTRICTED TO
ANGLES		MATERIAL			
		FINISH			
		CUSTOMER DRAWING		SCALE	5:1 SHEET 1 of 1 REV G