

# PC905

## Long Creepage Distance Photocoupler with Built-in Voltage Detection Circuit

※ Lead forming type (I type) is also available. (PC905I)

※ TÜV (DIN-VDE0884) approved type is also available as an option.

### ■ Features

1. Built-in voltage deviation detection circuit

2. Long creepage distance type

(Creepage distance : 8mm or more)

3. Conforms to European Safety Standard

(Internal insulation distance : 0.5mm or more)

4. High collector-emitter voltage ( $V_{CEO}$  : 70V)

5. High isolation voltage between input and output ( $V_{iso}$  : 5 000V<sub>rms</sub>)

6. Recognized by UL, file No. E64380

Approved by BSI (BS415 : No. 6990, BS7002 : No. 7567)

Approved by SEMKO No. 963501101


Approved by DEMKO No. 392592

### ■ Applications

1. Switching power supplies

### ■ Outline Dimensions

(Unit : mm)

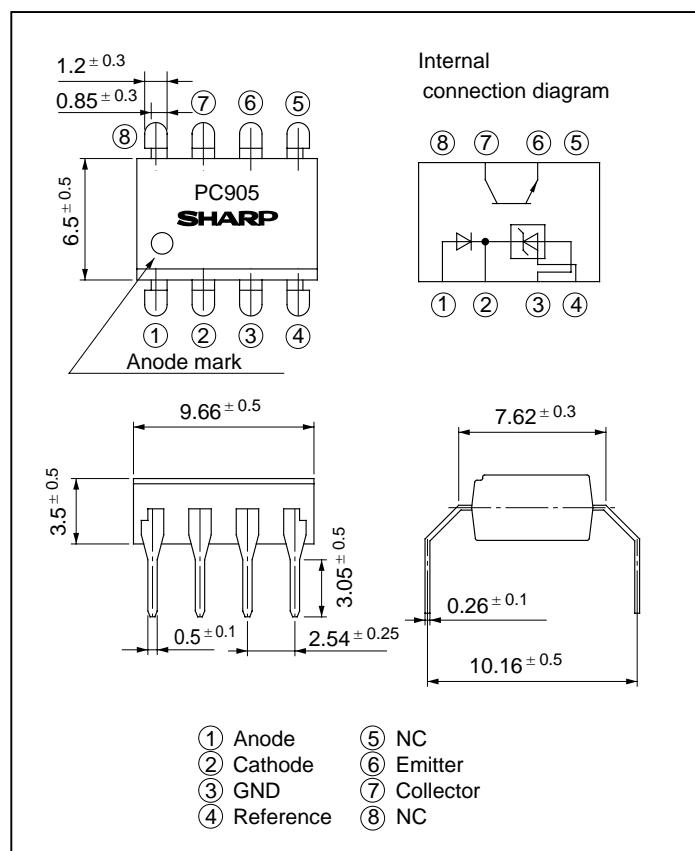

### ■ Absolute Maximum Ratings

(Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Anode current	I <sub>A</sub>	50	mA
	Anode voltage	V <sub>A</sub>	30	V
	Reference input current	I <sub>REF</sub>	10	mA
	Power dissipation	P	250	mW
Output	Collector-emitter voltage	V <sub>CEO</sub>	70	V
	Emitter-collector voltage	V <sub>ECO</sub>	6	V
	Collector current	I <sub>C</sub>	50	mA
	Collector power dissipation	P <sub>C</sub>	150	mW
Total power dissipation		P <sub>tot</sub>	350	mW
* <sup>1</sup> Isolation voltage		V <sub>iso</sub>	5 000	V <sub>rms</sub>
Operating temperature		T <sub>opr</sub>	- 25 to + 85	°C
Storage temperature		T <sub>stg</sub>	- 40 to + 125	°C
* <sup>2</sup> Soldering temperature		T <sub>sol</sub>	260	°C

\*1 40 to 60% RH, AC for 1 minute

\*2 For 10 seconds

## ■ Electro-optical Characteristics

( Ta = 25°C unless otherwise specified.)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	Fig.
Input	Reference voltage	V <sub>REF</sub>	V <sub>K</sub> = V <sub>REF</sub> , I <sub>A</sub> = 10mA	2.40	2.495	2.60	V 1
	*3 Temperature change in reference voltage	V <sub>REF</sub> (dev)	V <sub>K</sub> = V <sub>REF</sub> , I <sub>A</sub> = 10mA, Ta = - 25 to + 85°C	-	8	40	mV 1
	Voltage variation ratio in reference voltage	ΔV <sub>REF</sub> / ΔV <sub>A</sub>	I <sub>A</sub> = 10mA, ΔV <sub>A</sub> = 30V- V <sub>REF</sub>	-	- 1.4	- 5	mV/V 2
	Reference input current	I <sub>REF</sub>	I <sub>A</sub> = 10mA, R <sub>3</sub> = 10kΩ	-	2	10	μA 3
	*4 Temperature change in reference input current	I <sub>REF</sub> (dev)	I <sub>A</sub> = 10mA, R <sub>3</sub> = 10kΩ, Ta = - 25 to + 85°C	-	0.4	3	μA 3
	Minimum drive current	I <sub>MIN</sub>	V <sub>K</sub> = V <sub>REF</sub>	-	1	2	mA 1
	OFF-state anode current	I <sub>OFF</sub>	V <sub>A</sub> = 30V, V <sub>REF</sub> = GND	-	0.1	2	μA 4
	Anode-cathode forward voltage	V <sub>F</sub>	V <sub>K</sub> = V <sub>REF</sub> , I <sub>A</sub> = 10mA	-	1.2	1.4	V 1
Output	Collector dark current	I <sub>CEO</sub>	V <sub>CE</sub> = 20V	-	10 <sup>-9</sup>	10 <sup>-7</sup>	A 5
Transfer characteristics	*5 Current transfer ratio	CTR	V <sub>K</sub> = V <sub>REF</sub> , I <sub>A</sub> = 10mA, V <sub>CE</sub> = 5V	40	-	320	% 6
	Collector-emitter saturation voltage	V <sub>CE</sub> (sat)	V <sub>K</sub> = V <sub>REF</sub> , I <sub>A</sub> = 20mA, I <sub>C</sub> = 1mA	-	0.1	0.2	V 6
	Isolation resistance	R <sub>ISO</sub>	40 to 60% RH, DC500V	5 x 10 <sup>10</sup>	1 x 10 <sup>11</sup>	-	Ω -
	Floating capacitance	C <sub>f</sub>	V = 0, f = 1MHz	-	0.6	1.0	pF -


\*3 V<sub>REF</sub>(dev) = V<sub>REF</sub>(MAX.) - V<sub>REF</sub>(MIN.)

\*4 I<sub>REF</sub>(dev) = I<sub>REF</sub>(MAX.) - I<sub>REF</sub>(MIN.)

\*5 CTR = I<sub>C</sub> / I<sub>A</sub> x 100 (%)

## ■ Test Circuit


Fig. 1






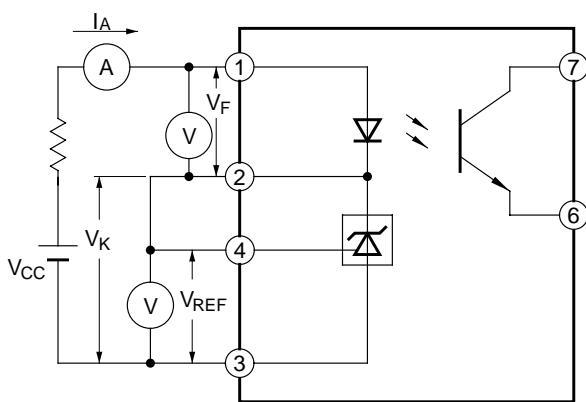


V<sub>K</sub> : Voltage between terminals ② and ③


V<sub>REF</sub> : Voltage between terminals ③ and ④

Fig. 2

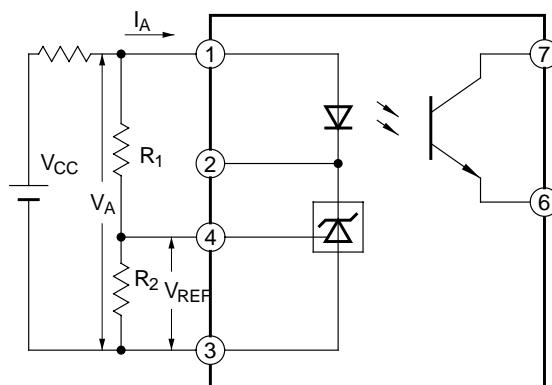


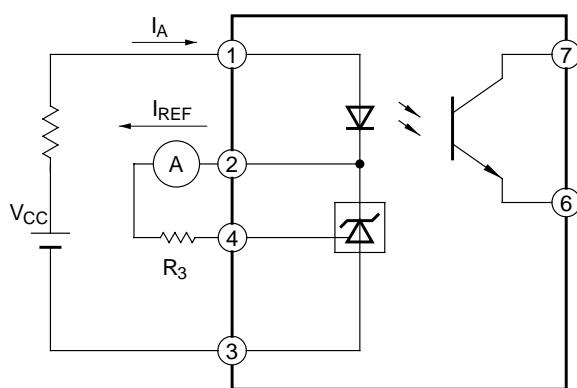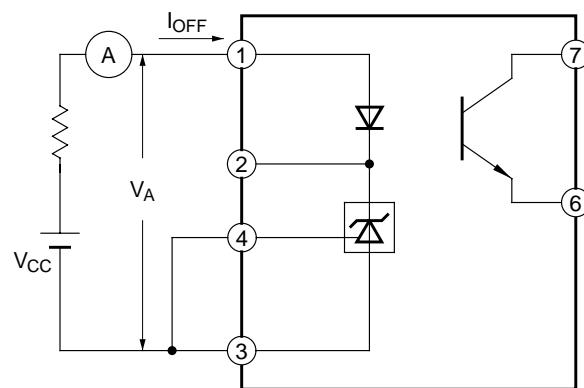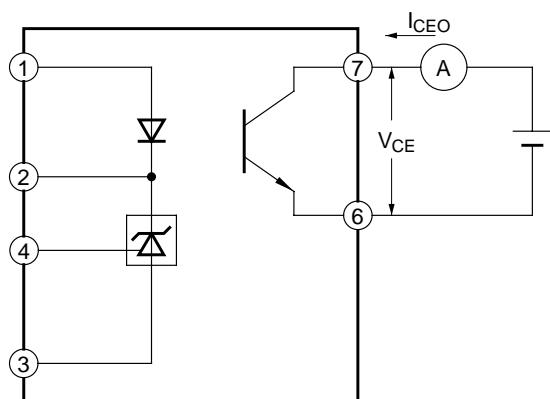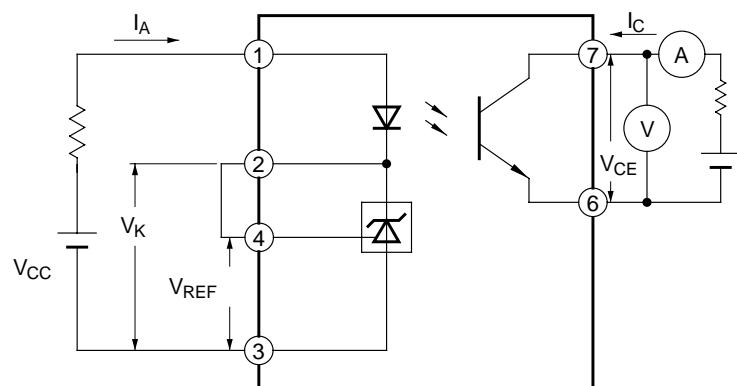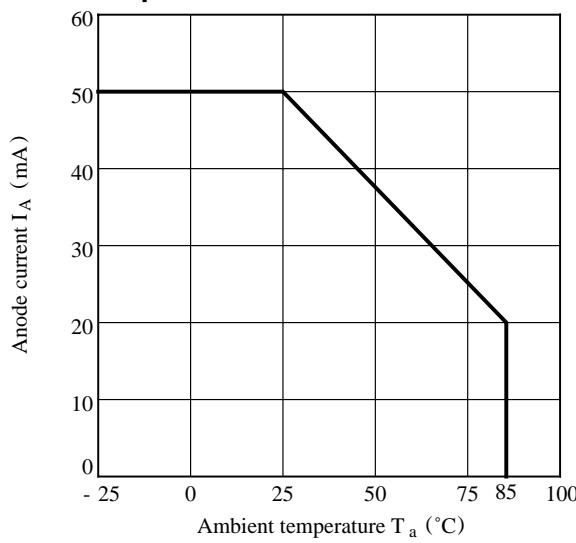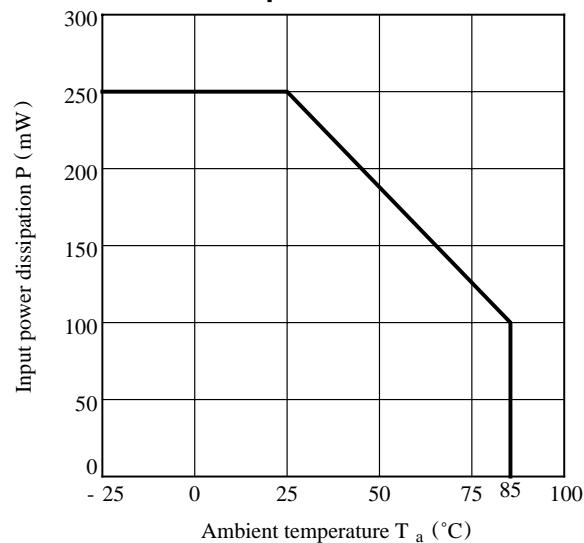**Fig. 3****Fig. 4****Fig. 5****Fig. 6****Fig. 7 Anode Current vs. Ambient Temperature****Fig. 8 Input Power Dissipation vs. Ambient Temperature**


**Fig. 9 Collector Power Dissipation vs. Ambient Temperature**

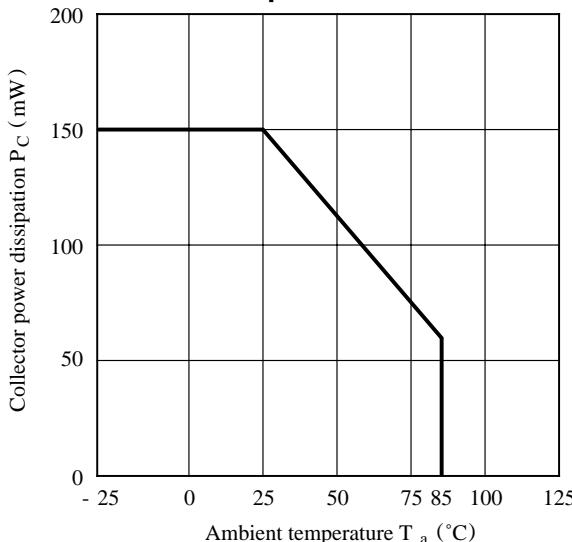


**Fig.10 Power Dissipation vs. Ambient Temperature**

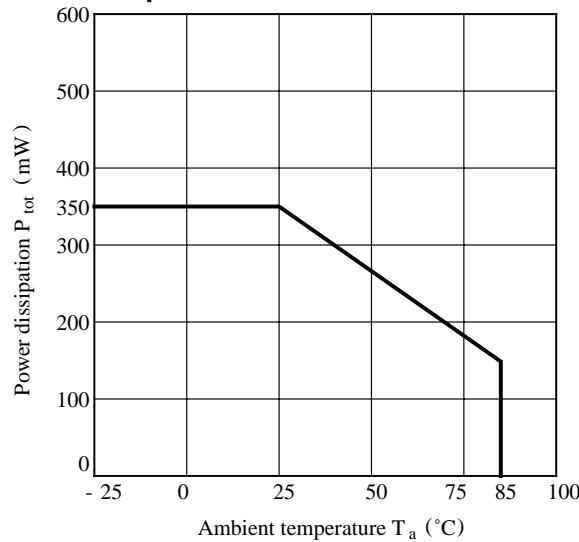


**Fig.11 Relative Current Transfer Ratio vs. Ambient Temperature**

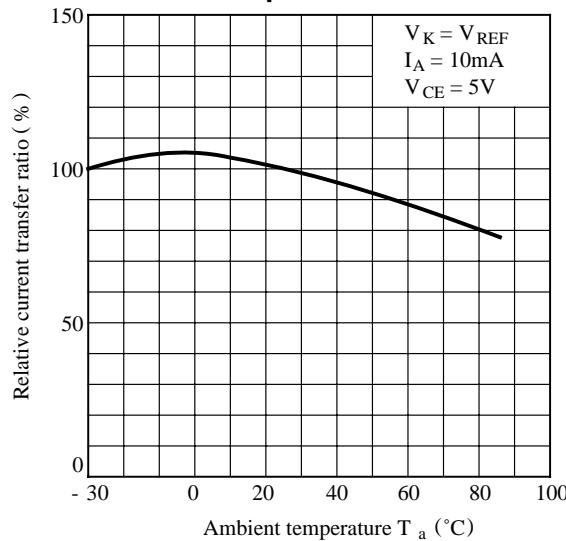


**Fig.12 Collector Dark Current vs. Ambient Temperature**

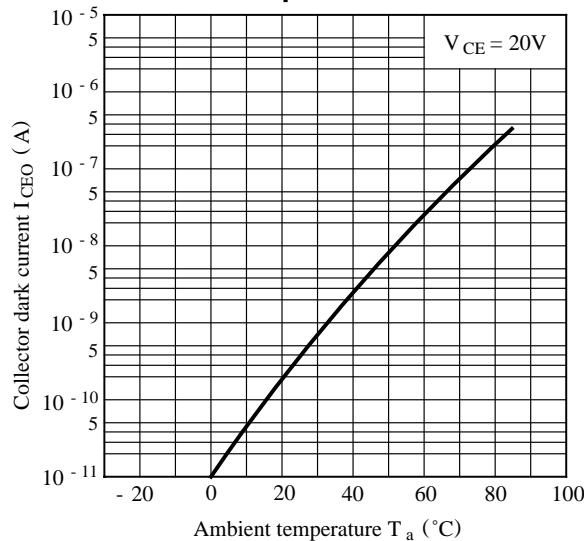


**Fig.13-a Anode Current vs. Reference Voltage**

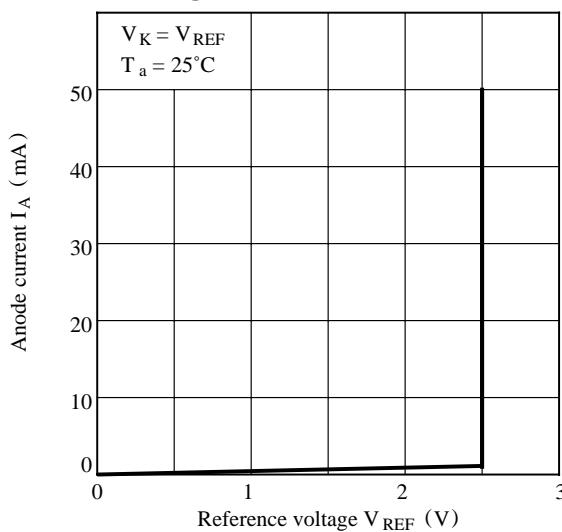


**Fig.13-b Anode Current vs. Reference Voltage**

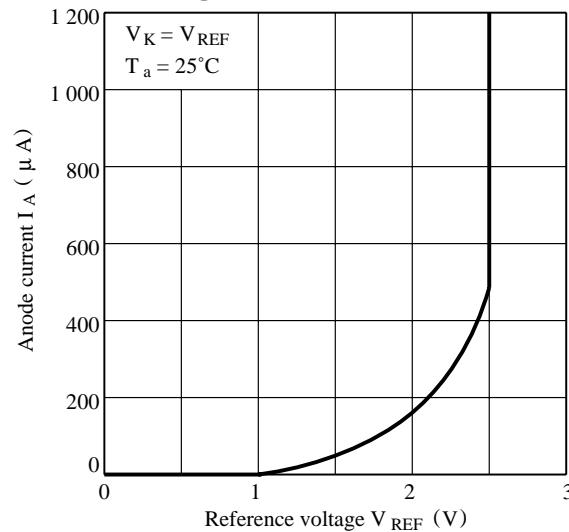


**Fig.14 OFF-state Anode Current vs. Ambient Temperature**

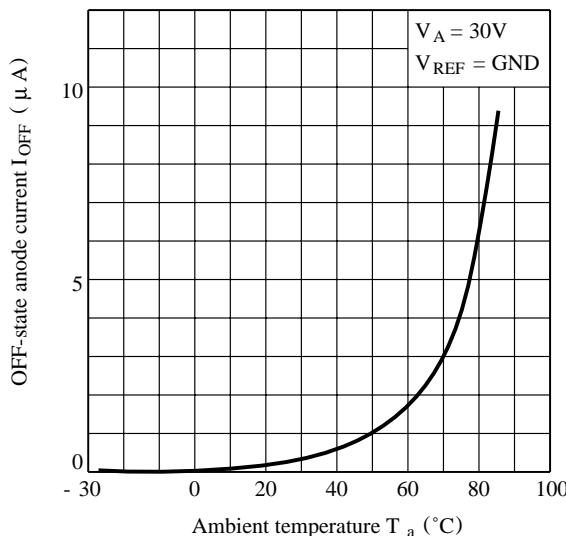


**Fig.15 Reference Voltage vs. Ambient Temperature**

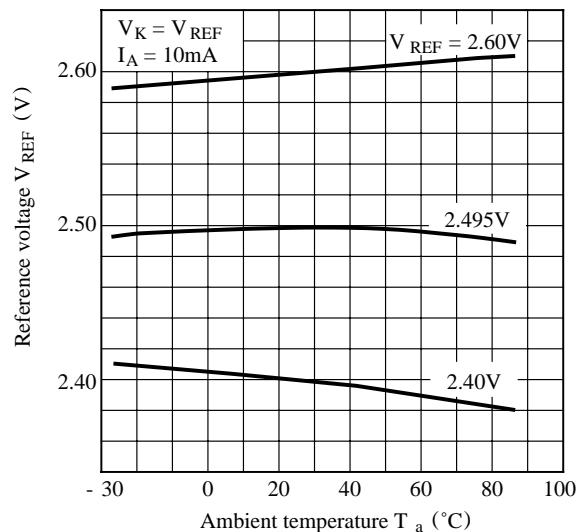


**Fig.16 Reference Input Current vs. Ambient Temperature**

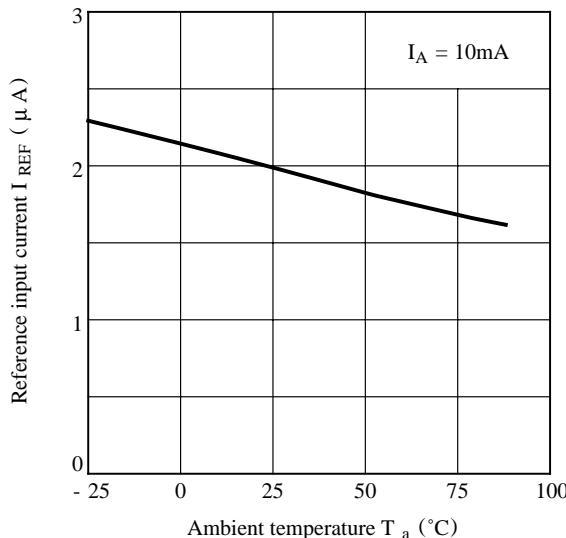


**Fig.17 Reference Voltage Change vs. Anode Voltage**






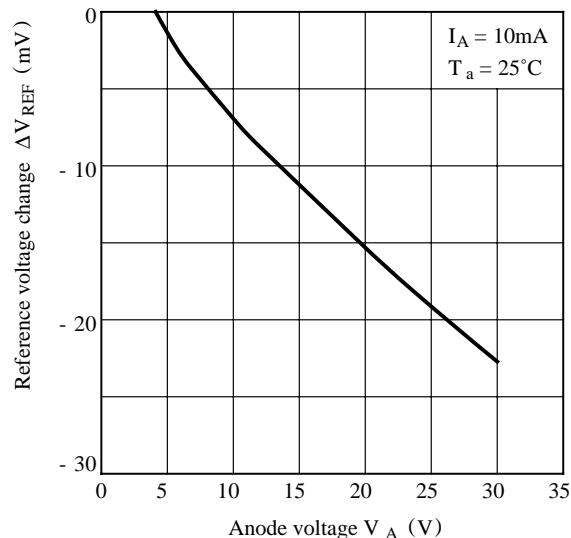


**Fig.18-a Voltage Gain (1) vs. Frequency**

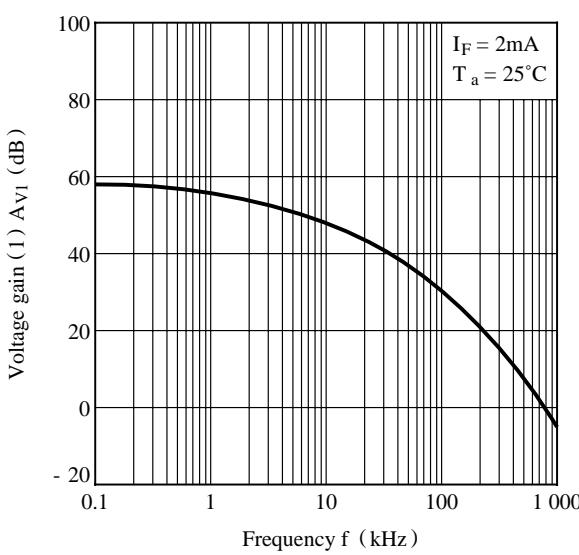

**Test Circuit for Voltage Gain (1) vs. Frequency**

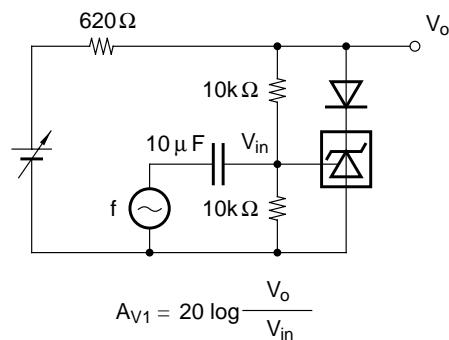

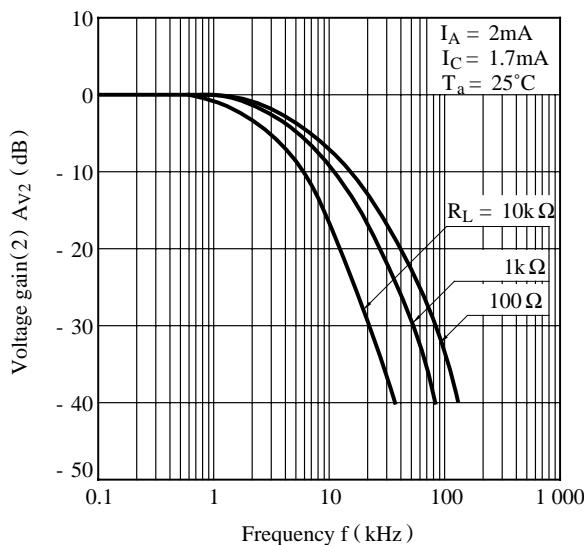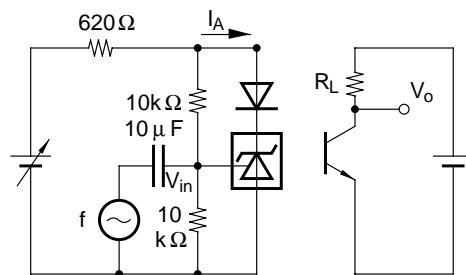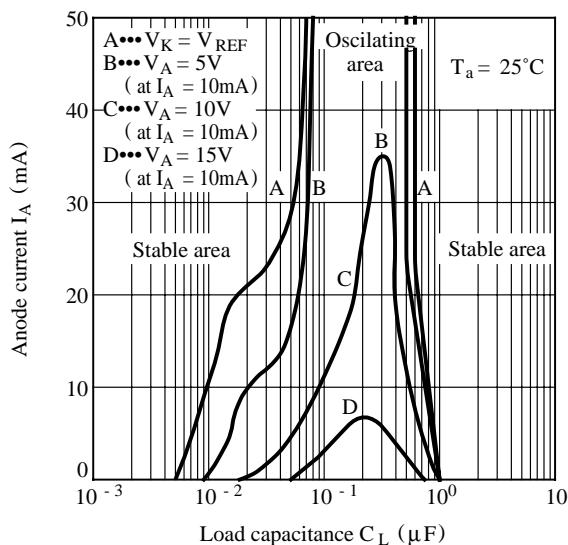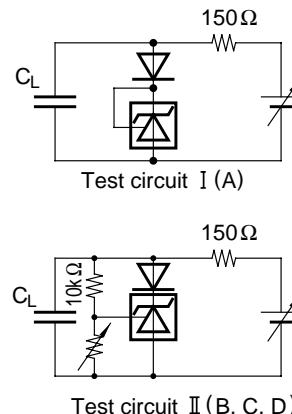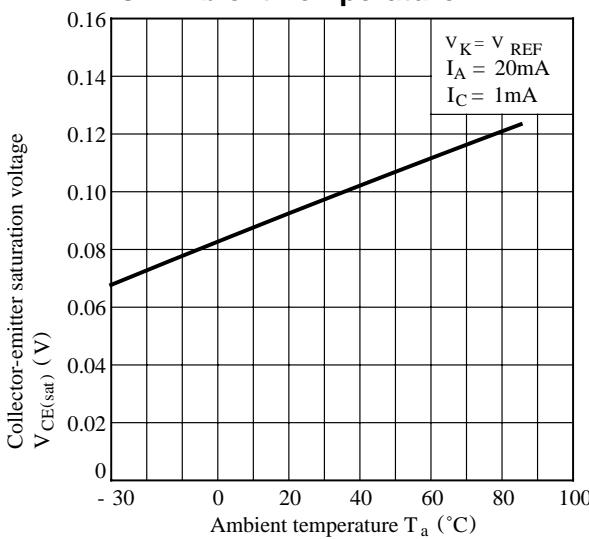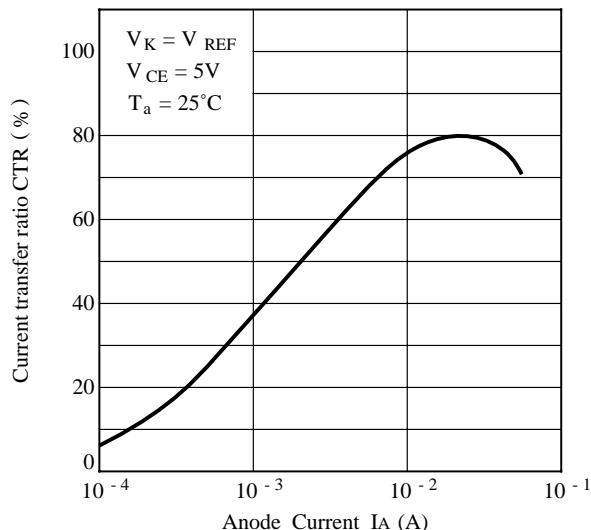**Fig.18-b Voltage Gain (2) vs. Frequency****Test Circuit for Voltage Gain (2) vs. Frequency****Fig.19 Anode Current vs. Load Capacitance****Test Circuit for Anode Current vs. Load Capacitance****Fig.20 Collector-emitter Saturation Voltage vs. Ambient Temperature****Fig.21 Current Transfer Ratio vs. Anode Current**

## ■ Precautions for Use

Handle this product the same as with other integrated circuits against static electricity.

- As for other general cautions, refer to the chapter "Precautions for Use"