



SAW Components

Data Sheet B7710





SAW Components

B7710

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet




Chip sized SAW package DCS6I

Features

- Low-loss RF filter for mobile telephone EGSM systems, receive path
- Low amplitude ripple
- Usable passband 35 MHz
- Unbalanced to balanced operation
- No external matching required
- Ceramic package for **Surface Mounted Technology (SMT)**

Terminals


- Ni, gold-plated

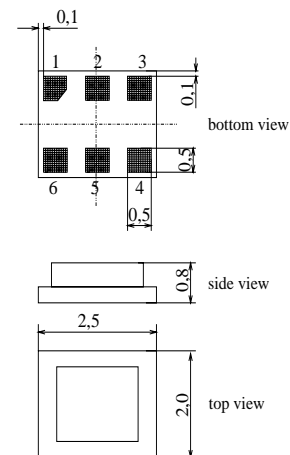

Dimensions in mm, approx. weight 0,014g

Pin configuration

- 2 Input, unbalanced
- 4, 6 Balanced outputs
- 1, 3, 5 To be grounded
- 1, 5 Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B7710	B39941-B7710-C610	C61157-A7-A76	F61074-V8112-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 10 / + 80	°C	
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	200	V	
Input power max.				>2000 hrs at 85°C
@ 880 ... 915 MHz	P_{IN}	13		
@ 1710...1785 MHz		13		
@ 1850...1910 MHz		13		
elsewhere		0		
				source and load impedance 50 Ω peak power of GSM signal, duty cycle 2 : 8, continuous wave



SAW Components

B7710

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = 25 \pm 2^\circ \text{C}$
Terminating source impedance: $Z_S = 50 \Omega$
Terminating load impedance: $Z_L = 50 \Omega$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	α_{\max}				
925,0 ... 960,0 MHz		—	3,0	3,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
925,0 ... 960,0 MHz		—	1,1	1,4	dB
VSWR					
925,0 ... 960,0 MHz		—	1,7	2,0	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)					
925,0 ... 960,0 MHz		-10	—	10	°
Output amplitude balance ($ S_{31}/S_{21} $)					
925,0 ... 960,0 MHz		-1,0	—	1,0	dB
Diff. to common mode suppression	S_{sc12}				
925,0 ... 960,0 MHz		20	25	—	dB
855,0 ... 995,0 MHz		20	25	—	dB
1710,0 ... 1990,0 MHz		20	54	—	dB
3420,0 ... 3980,0 MHz		20	40	—	dB
Attenuation	α				
0,0 ... 850,0 MHz		50	59	—	dB
850,0 ... 905,0 MHz		35	47	—	dB
905,0 ... 915,0 MHz		18	30	—	dB
980,0 ... 1000,0 MHz		23	30	—	dB
1000,0 ... 1050,0 MHz		30	40	—	dB
1050,0 ... 2000,0 MHz		40	45	—	dB
2000,0 ... 3000,0 MHz		30	35	—	dB
3000,0 ... 4000,0 MHz		20	28	—	dB
4000,0 ... 6000,0 MHz		15	22	—	dB



SAW Components

B7710

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = +10^{\circ}\text{C}$ to $+60^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\ \Omega$
Terminating load impedance: $Z_L = 50\ \Omega$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	α_{\max}				
925,0 ... 960,0 MHz		—	3,1	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
925,0 ... 960,0 MHz		—	1,2	1,6	dB
VSWR					
925,0 ... 960,0 MHz		—	1,7	2,0	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)					
925,0 ... 960,0 MHz		-10	—	10	$^{\circ}$
Output amplitude balance ($ S_{31}/S_{21} $)					
925,0 ... 960,0 MHz		-1,0	—	1,0	dB
Diff. to common mode suppression	S_{sc12}				
925,0 ... 960,0 MHz		20	25	—	dB
855,0 ... 995,0 MHz		20	25	—	dB
1710,0 ... 1990,0 MHz		20	54	—	dB
3420,0 ... 3980,0 MHz		20	40	—	dB
Attenuation	α				
0,0 ... 850,0 MHz		50	59	—	dB
850,0 ... 905,0 MHz		35	47	—	dB
905,0 ... 915,0 MHz		18	26	—	dB
980,0 ... 1000,0 MHz		20	31	—	dB
1000,0 ... 1050,0 MHz		30	40	—	dB
1050,0 ... 2000,0 MHz		40	45	—	dB
2000,0 ... 3000,0 MHz		30	35	—	dB
3000,0 ... 4000,0 MHz		20	28	—	dB
4000,0 ... 6000,0 MHz		15	22	—	dB



SAW Components

B7710

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -10^{\circ}\text{C}$ to $+80^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\ \Omega$
Terminating load impedance: $Z_L = 50\ \Omega$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	α_{\max}				
925,0 ... 960,0 MHz		—	3,2	3,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
925,0 ... 960,0 MHz		—	1,2	2,0	dB
VSWR					
925,0 ... 960,0 MHz		—	1,7	2,0	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)					
925,0 ... 960,0 MHz		-10	—	10	$^{\circ}$
Output amplitude balance ($ S_{31}/S_{21} $)					
925,0 ... 960,0 MHz		-1,0	—	1,0	dB
Diff. to common mode suppression	S_{sc12}				
925,0 ... 960,0 MHz		20	25	—	dB
855,0 ... 995,0 MHz		20	25	—	dB
1710,0 ... 1990,0 MHz		20	54	—	dB
3420,0 ... 3980,0 MHz		20	40	—	dB
Attenuation	α				
0,0 ... 850,0 MHz		50	59	—	dB
850,0 ... 905,0 MHz		35	47	—	dB
905,0 ... 915,0 MHz		18	26	—	dB
980,0 ... 1000,0 MHz		20	29	—	dB
1000,0 ... 1050,0 MHz		30	40	—	dB
1050,0 ... 2000,0 MHz		40	45	—	dB
2000,0 ... 3000,0 MHz		30	35	—	dB
3000,0 ... 4000,0 MHz		20	28	—	dB
4000,0 ... 6000,0 MHz		15	22	—	dB



SAW Components

B7710


Low-Loss Filter for Mobile Communication

942,5 MHz


Data Sheet





Transfer function (measurement)

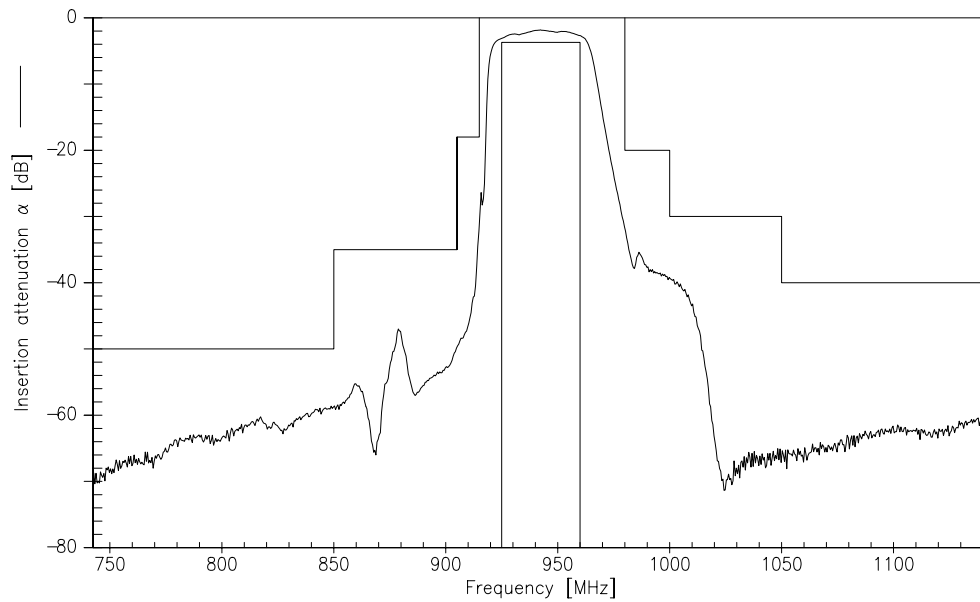

Transfer function (wideband measurement)

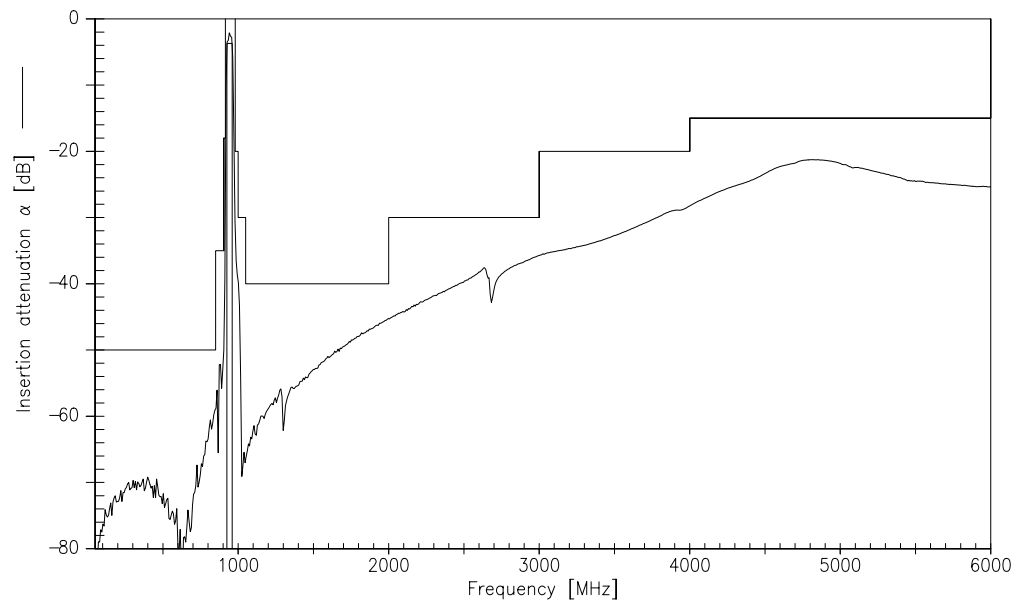

Matching (measurement)

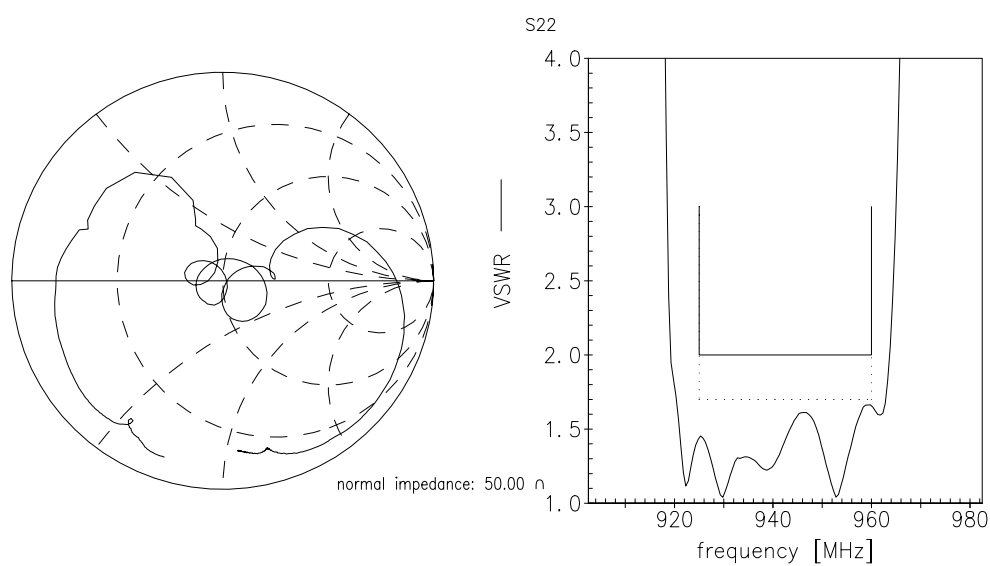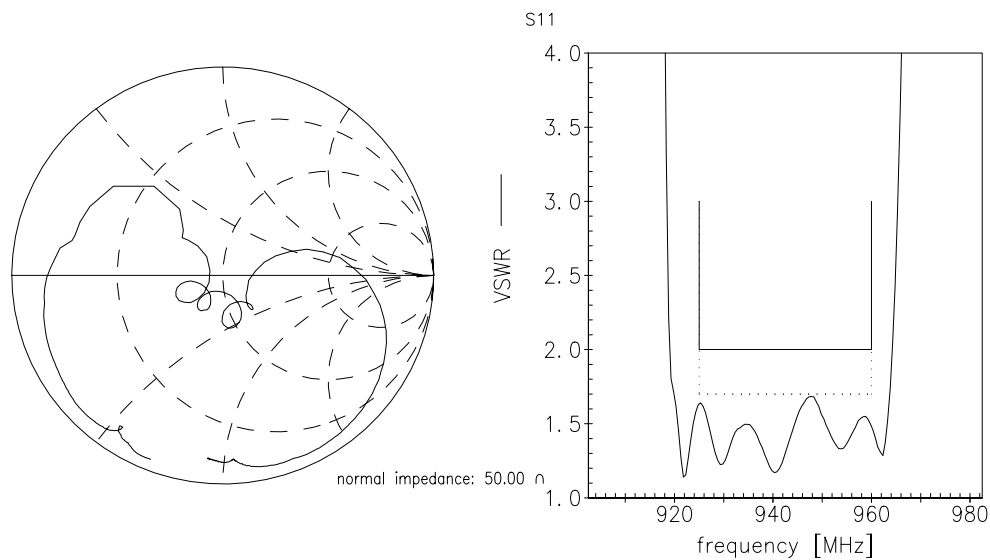



SAW Components	B7710
Low-Loss Filter for Mobile Communication	942,5 MHz
Data Sheet	SMD

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC WT
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.