REV.	DATE	DESCRIPTION
A	04/05/03	UPDATE DRAWING FORMAT

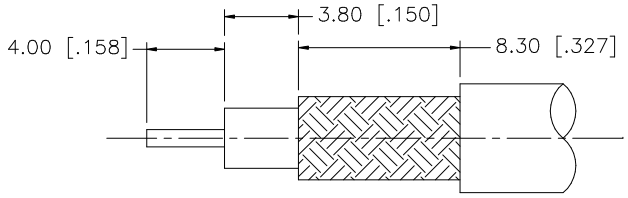

RECOMMENDED CABLE
STRIPPING DIM'S

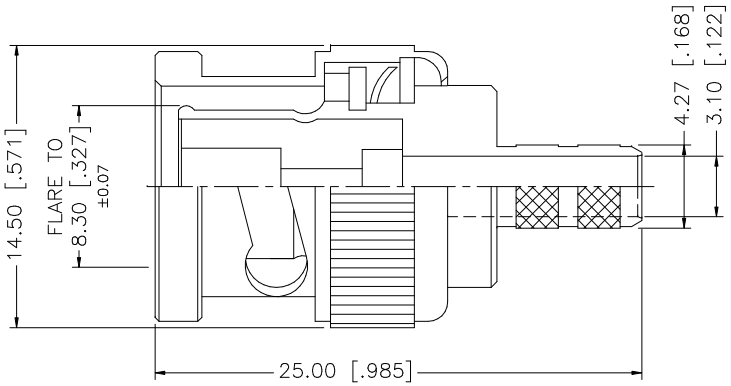

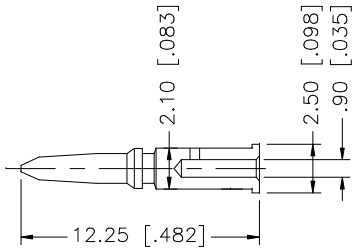

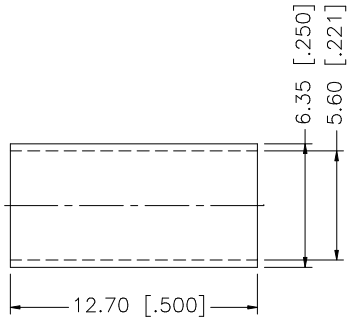

NOTE:

1. CRIMPED FERRULE
   HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
   HEX CRIMP SIZE .068"

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6	FERRULE	COPPER	NICKEL	1
5	GASKET	RUBBER	RED	1
4	CONTACT PIN	BRASS	GOLD	1
3	INSULATOR	DELRIN	NATURAL	1
2	BODY	BRASS	NICKEL	1
1	SHELL	ZINC DIE CAST	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	04/05/03
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/112/112514.DWG

Amphenol Connex

PART DESCRIPTION
BNC CRIMP PLUG
(FOR RG-55/U, 142A/U, 223/U, 400/U)

PART NO. 112514

DWG. NO.	REV.	SIZE	SCALE
112514.DWG	A	A	NA

Downloaded from Elcodis.com electronic components distributor