
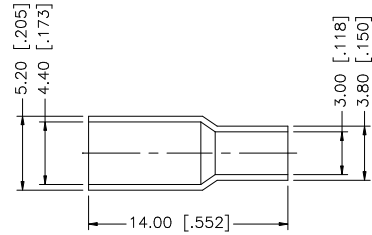


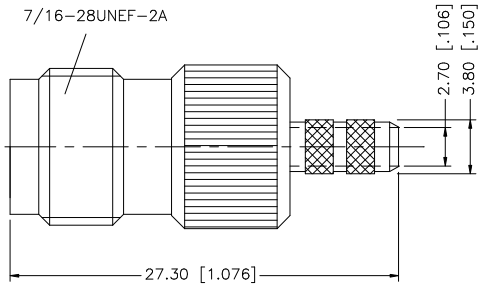


REV.	DATE	DESCRIPTION
NC	01/06/98	INITIAL RELEASE
A	02/19/07	UPDATE DRAWING FORMAT

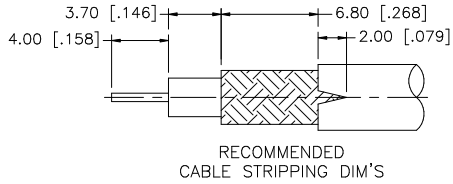

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex								
8				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	DRAWN	G.R.S.	02/19/07	PART DESCRIPTION TNC CRIMP JACK (FOR RG-174, 316 CABLE)							
7					CHECKED										
6					ISSUED			PART NO. 122138							
5					SHEET	1 OF 1									
4	FERRULE	BRASS	NICKEL	1	CAD FILE			DWG. NO.	122138.DWG	REV.	A	SIZE	A	SCALE	NA
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	C:/122/122138.DWG										
2	INSULATOR	DELTRIN	NATURAL	1											
1	BODY	BRASS	NICKEL	1											