
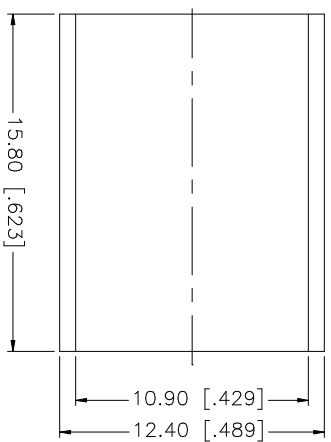
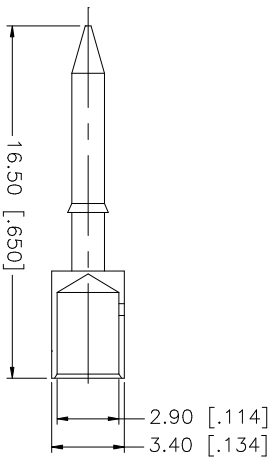
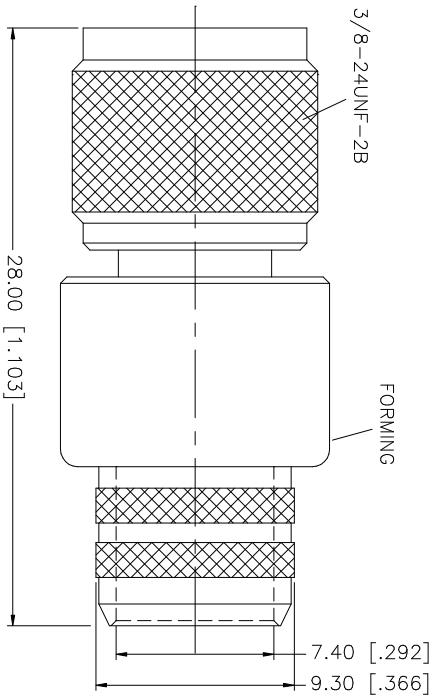


REV.	DATE	DESCRIPTION
NC	01/24/05	INITIAL RELEASE
A	01/19/06	UPDATE PART DESCRIPTION TO INCLUDE "LMR400"

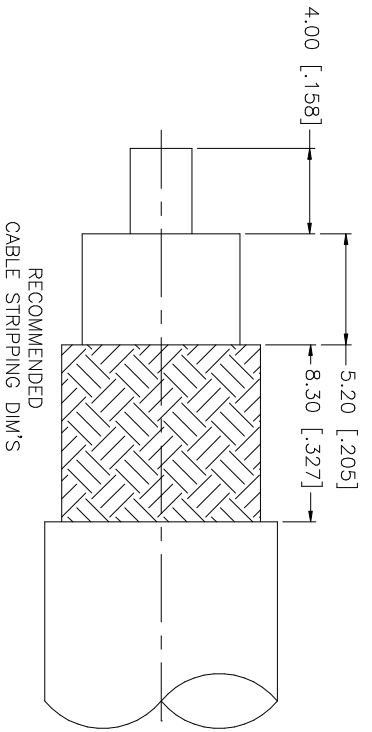

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
 2. CONTACT PIN TO SOLDER.

Amphenol Connex

MINI-UHF CRIMP PLUG
(FOR RG-8/U, LMR400 CABLE)

182337

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	PART DESCRIPTION	DWG. NO.	REV.	SIZE	SCALE	
1	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	CAD FILE C:/182/182337.DWG	G.R.S.	01/19/06	MINI-UHF CRIMP PLUG (FOR RG-8/U, LMR400 CABLE)	182337.DWG	A	A	NA
2	TEFLON	NATURAL	1									
3	BRASS	GOLD	1									
4	COPPER	NICKEL	1									
5												
6												
7												
8												