


REV.	DATE	DESCRIPTION
A	03/27/05	UPDATE DRAWING FORMAT

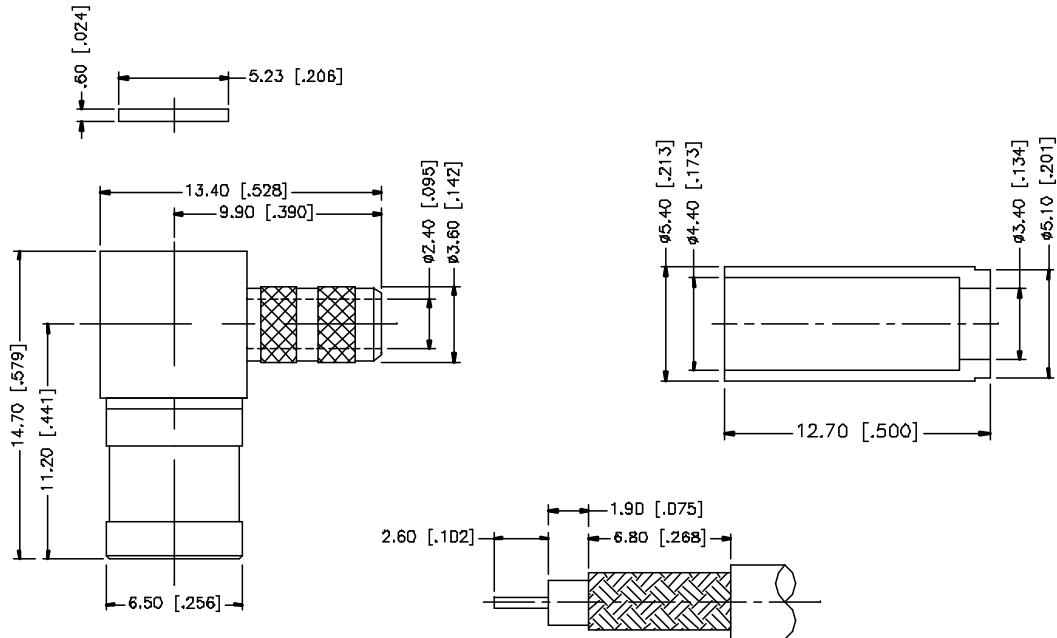

RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	DESCRIPTION
A	03/27/05	UPDATE DRAWING FORMAT

8																			
7																			
6																			
5																			
4	FERRULE	BRASS	GOLD	1															
3	CONTACT PIN	BER. COPPER	GOLD	1															
2	INSULATOR	TEFLON	NATURAL	1															
1	BODY	BRASS	GOLD	1															
	DESCRIPTION	MATERIAL	FINISH	QTY															

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS	DATE	<h1 style="color: blue; margin: 0;">Amphenol Connex</h1>	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm		DRAWN	G.R.S.		03/27/05
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"		CHECKED			
DO NOT SCALE DRAWING		ISSUED			
		SHEET	1 OF 1		
		CAD FILE	C:/142/142221-75.DWG		
		DWG. NO.	142221-75.DWG		
		REV.	A		
		SIZE	A		
		SCALE	NA		

PART DESCRIPTION		<h2 style="margin: 0;">MINI 75ohm SMB R/A CRIMP PLUG (FOR AT&T 735A CABLE)</h2>
PART NO.		
		142221-75