


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/30/00	-	INITIAL RELEASE
NC	04/30/08	100012	UPDATE DRAWING FORMAT

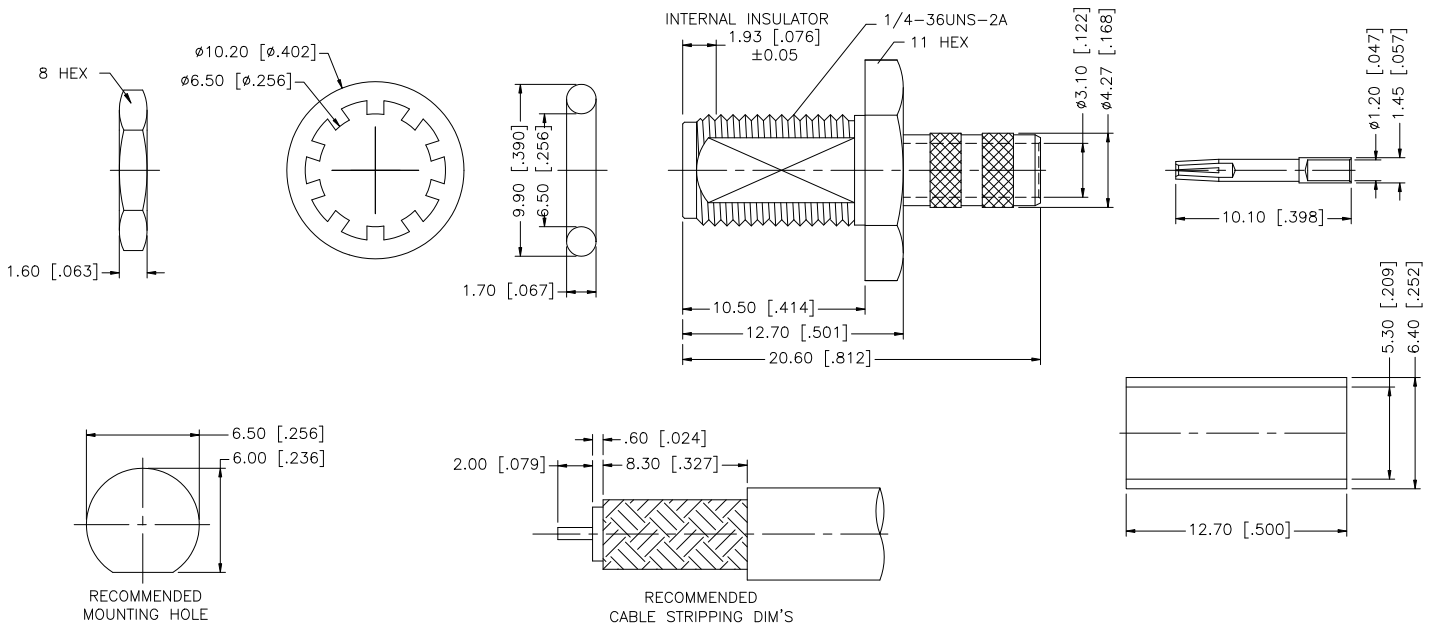

NOTES:  
1. CRIMPED FERRULE HEX CRIMP SIZE .213"

				APPROVALS	DATE	<b>Amphenol Connex</b>						
8										PART DESCRIPTION <b>SMA BULKHEAD CRIMP JACK O-RING SEAL (FOR RG-58C/U, 58/U CABLE)</b>		
7	FERRULE	COPPER	GOLD	1	DRAWN	GRS	04/30/08	PART NO. <b>132280</b>				
6	HEX NUT	BRASS	GOLD	1	CHECKED							DWG. NO. 132280.DWG
5	LOCK WASHER	BRASS	GOLD	1	ISSUED			REV. A SIZE A SCALE NA				
4	GASKET	SILICONE	RED	1	SHEET	1 OF 1						DO NOT SCALE DRAWING
3	CONTACT PIN	BER. COPPER	GOLD	1	CAD FILE	C:/132/132280.DWG						
2	INSULATOR	PTFE	NATURAL	1								
1	BODY	BRASS	GOLD	1								
	DESCRIPTION	MATERIAL	FINISH	QTY								

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.40mm  
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 = ± 0.007"  
.315 - 1.180 = ± 0.015"  
1.180 - 4.724 = ± 0.020"