



THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED.
 © 2007 BY TDS ELECTRONICS CORPORATION

REV	DATE	DESCRIPTION	BY	CHK
M1	2/6/2007	REV PER ECO 06-02805	DW	JL
M2		REVISED PER ECO-09-020889	02SEPO9	KK AEG

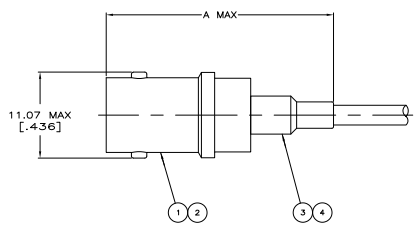

RECOMMENDED STRIP LENGTH

- 1. USE INSTRUCTION SHEET 9050
- △ USE HAND TOOL 354940-1
- △ THIS PART NUMBER IS RESTRICTED. SEE SEPARATE RESTRICTED CUSTOMER DRAWING
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

SUPERSEDED BY	RG-174/U,188/U & 316/U	220210-1	220009-5	30.48 [1.200]	21427-2	9-328666-0	2-221149-0	221455-3	9-228979-1
SUPERSEDED BY	RG-59/U,59A/U,59B/U,62/U,62A/U & 62B/U	220189-2	220187-2	30.48 [1.200]	--	9-50428-0	1-221149-3	221455-2	9-228979-0
OBsolete	BELDEN YR40862	220189-1	220187-1	30.48 [1.200]	--	9-50427-1	3-221149-6	221455-1	1-228979-7
SUPERSEDED BY	RG-179/U,179A/U,179B/U,187/U & 187A/U	220210-1	220009-5	30.48 [1.200]	21427-2	9-328666-0	3-221149-1	221455-3	1-228979-6
SUPERSEDED BY	BELDEN 9907	220189-1	220187-1	30.48 [1.200]	--	9-50427-1	2-221149-6	221455-5	1-228979-3
SUPERSEDED BY	BELDEN 8281	--	220189-6	38.10 [1.500]	--	9-331256-0	221149-6	221455-4	228979-8
OBsolete	RG-174/U,188/U & 316/U	220210-1	220009-5	30.48 [1.200]	21427-2	9-328666-0	2-221149-0	221455-3	228979-7
OBsolete	RG-59/U,59A/U,59B/U,62/U,62A/U & 62B/U	220189-2	220187-2	30.48 [1.200]	--	9-50428-0	1-221149-3	221455-2	228979-6
OBsolete	RG-59/U,59A/U,59B/U,59C/U,141/U & 141A/U	220189-1	220187-1	30.48 [1.200]	--	9-50427-1	221149-6	221455-1	228979-5
	FOR USE WITH CABLE	DIE SET	CRIMP TOOL	A	④ BUSHING QTY = 1	③ FERRULE QTY = 1	② CONTACT QTY = 1	① JACK ASSY QTY = 1	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE: 11/17/02
 BY: E. SUTTI
 CHECKED: M. HOFFELBAUGH
 PART NO: 108-12047

THIS DRAWING IS RESTRICTED TO THE USE OF THE CUSTOMER DRAWING.

DATE: 00779
 QTY: 228979

DATE: 2.1