

4

3



2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION NOV. 2005.
 © COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
C		ECR-05-016219	26NOV05	JMS	FWK

- NOTES:
- ⚠ PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - ⚠ 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - ⚠ Ag PLATING
- 4 ELECTRICAL CHARACTERISTICS
- FREQUENCY RANGE: DC - 2 GHz
 - NOMINAL IMPEDANCE: 75 Ohm
 - INSULATION RESISTANCE: 5000 MOhm
 - WORKING VOLTAGE: 500 Volts RMS at Sea Level
 - DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
 - CONTACT RESISTANCE: 1.50 mOhm Max
 - CENTRE CONTACT: 0.20 mOhm Max
 - OUTER CONTACT: N/A
 - VSWR @ xGHz: N/A
 - INSERTION LOSS xdb: N/A
- 5 MECHANICAL CHARACTERISTICS
- COUPLING RETENTION FORCE: N/A
 - CABLE RETENTION FORCE: N/A
 - DURABILITY: 500 Cycles Min
- 6 ENVIRONMENTAL CHARACTERISTICS
- OPERATING TEMPERATURE: -65 to +165 DegC

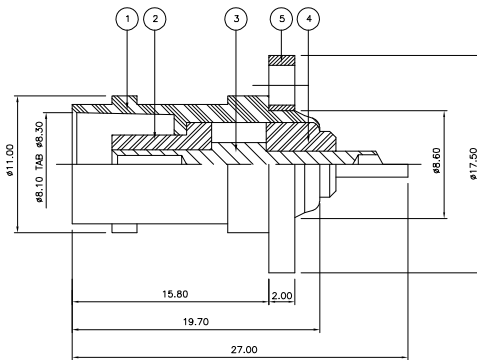

QTY	QTY PER ASSY	PARTS LIST	ITEM
1	1	BRASS	5
1	1	PTFE	4
1	1	BRASS	3
1	1	PTFE	2
1	1	BRASS	1
6--0	1--0	MATERIAL	DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SANDWELL 26NOV05	Tyco Electronics Corporation	
DIMENSIONS: mm		CHK S.PARLOW 26NOV05	Bideford EX39 4HE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.WHEELER-KING 26NOV05	NAME BNC PANEL SOCKET 50 OHM & 75 OHM	
0 PLC ± -		PRODUCT SPEC 108-3435	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1 PLC ± -		APPLICATION SPEC	A3 00779 C-1337446	
2 PLC ± -		WEIGHT -	CUSTOMER DRAWING	
3 PLC ± -		FINISH -	SCALE NTS SHEET 1 OF 1 REV C	
4 PLC ± -				
ANGLES ± -				
MATERIAL SEE TABLE				