

4

3



2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION FEB .2006.
 © COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
C		ECR-06-001518	01FEB06	JMS	FWK

- NOTES:**
- 1. PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - 2. 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - 3. Au PLATING
 - 4. Ni PLATING
 - 5. THIS ITEM MUST BE WHITE
 - 6. HAND TOOL : 9-1478240-0
 - 7. DIE SET : 9-1478245-0
 - 8. **ELECTRICAL CHARACTERISTICS**
 - FREQUENCY RANGE: DC - 4 GHz
 - NOMINAL IMPEDANCE: 50 Ohm
 - INSULATION RESISTANCE: 5000 MOhm
 - WORKING VOLTAGE: 500 Volts RMS at Sea Level
 - DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
 - CONTACT RESISTANCE:
 - CENTRE CONTACT: 1.50 mOhm Max
 - OUTER CONTACT: 0.20 mOhm Max
 - VSWR @ 4GHz: 1.30:1 Max
 - INSERTION LOSS dB @ x 3 GHz: 0.20 Max
 - 9. **MECHANICAL CHARACTERISTICS**
 - COUPLING NUT RETENTION FORCE: N/A
 - CABLE RETENTION FORCE: 85N Min
 - MOUNT NUT RECOMMENDED TORQUE: 4N
 - DURABILITY: 500 Cycles Min
 - 10. **ENVIRONMENTAL CHARACTERISTICS**
 - OPERATING TEMPERATURE: -65 to +165 DegC

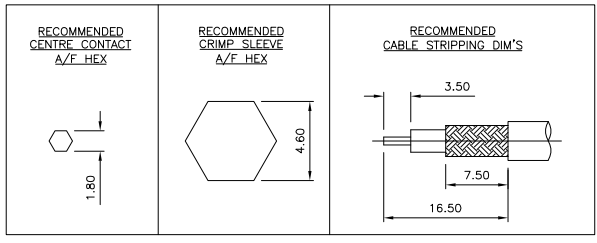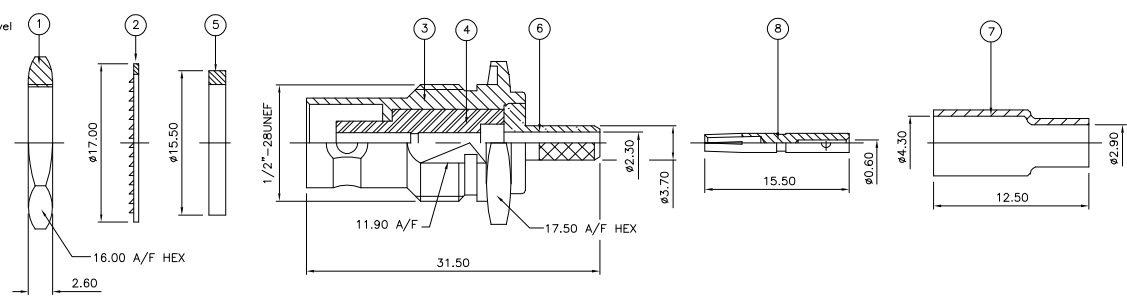

QTY	UNIT	MATERIAL	DESCRIPTION	ITEM
1	1	BRASS	CONTACT	8
1	1	BRASS	FERRULE	7
1	1	BRASS	CHASSIS	6
1	1	SILICONE RUBBER	GASKET	5
1	1	PTFE	INSULATION	4
1	1	BRASS	BODY	3
1	1	STEEL	LOCKWASHER	2
1	1	BRASS	HEX NUT	1
6--0	1--0	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	J.SANDWELL	01FEB06
CHK	S.PARLOW	01FEB06
APVD	F.WHEELER-KING	01FEB06
PRODUCT SPEC		
APPLICATION SPEC		
411-3247		
WEIGHT		

Tyco Electronics Corporation
Bideford EX39 4HE

NAME: BNC BULKHEAD JACK REAR MOUNT CRIMP 50 OHM RG174A/U, 188A/U, 316/U, URM95, KX3B, KX22A

SIZE: A3 CAGE CODE: 00779 DRAWING NO: 1337548 RESTRICTED TO: -

CUSTOMER DRAWING SCALE: NTS SHEET 1 OF 1 REV C