




THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 COPYRIGHT © BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
		REV	DESCRIPTION	DATE	BY
AJ	16	0	REV PER EC-0514-0496-04	31JAN2005	GA JL

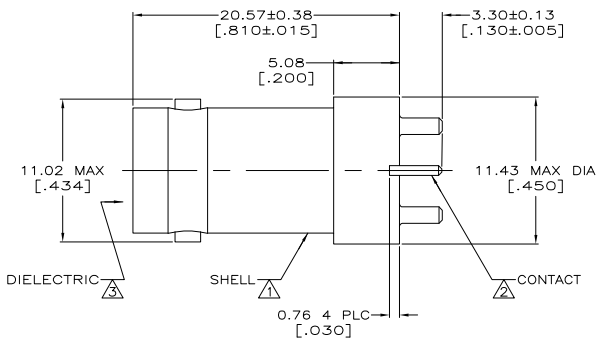

- △ ZINC PER QQ-Z-363.
- △ BERYLLIUM COPPER PER ASTM-B-196.
- △ PTFE PER MIL-P-19468.
- △ TIN PLATE PER ASTM-B-545, 3.05 μm [.000120] MINIMUM THICK.
- △ GOLD PLATE PER MIL-G-45204 0.76 μm [.000030] MINIMUM THICK.
- 6. SEE INSTRUCTION SHEET 408-9889.

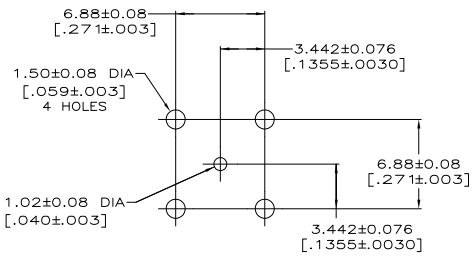

PCB CONFIGURATION

CONTACT FINISH	SHELL FINISH	5413969-2
		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: G. ATTADIA - DOCKS 31JAN2005	DATE	31JAN2005
DIMENSIONS: mm [INCHES]		DR: J. HAVENER 31JAN2005	NAME	Tyco Electronics Corporation Harrisburg, PA 17105-3608
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR: J. LIPPERT 31JAN2005	PRODUCT SPEC	JACK, VERTICAL, PCB, 50 OHM, COMMERCIAL BNC
0 PLC	± .005	PRODUCT SPEC	108-1207B	APPLICATION SPEC
1 PLC	± .008	SIZE	A2	00779
2 PLC	± .010	SCALE	5:1	SHEET 1 of 1
3 PLC	± .015	RESTRICTED TO		REV 0
4 PLC	± .020			
ANGLES	± .005			
FINISH				
MATERIAL: SEE NOTES 1-3	FINISH: SEE NOTES 4-6	WEIGHT		
		CUSTOMER DRAWING		