


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
--	REVISED	9/8/94	<i>BB</i>
01 ₃	REVISED PER ECN 99-0001	DN 5/19/99	<i>PN</i> 1/24/99

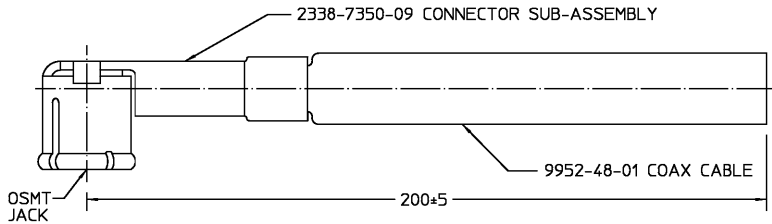

OUTLINE, -50 AND B/M MUST CARRY THE SAME REVISION LEVEL

OUTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
CENTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
DIELECTRIC	POLYPROPYLENE, GF	N/A
CABLE JACKET	FLUORINATED ETHYLENE-PROPYLENE	N/A
SHIELD	SILVER COATED COPPER WIRE, 38 AWG	N/A
DIELECTRIC	PERFLUOROALKOXY OR POLYTETRAFLUOROETHYLENE	N/A
CENTER CONDUCTOR	SILVER COATED COPPER CLAD STEEL	N/A

ELECTRICAL

Frequency DC - 6 GHz
 Nominal Impedance 50 ohms
 Voltage Rating 250 Volts (VRMS Max.)
 VSWR 1.20:1 Max. @ 2GHz
 1.40:1 Max. @ 6GHz
 Insulation Resistance 1000 Megohms Minimum
 Dielectric Withstanding Voltage 500 Volts (VRMS Minimum)
 @ Sea Level

MECHANICAL

Connector Durability 100 mating cycles

ENVIRONMENTAL

Temperature Rating -55°C (-67°F) To +150°C (302°F)

COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		
TOLERANCE ON		
FRAC.	DEC.	ANGLES
+ .164	+ .005	+ °
DRAWN BY <i>BB</i>	DATE 10/9/92	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
CHECKED BY		
APPROVED BY <i>ADavis</i>	10/12/92	
USE ASSY PROCEDURE	TITLE OSMT RIGHT ANGLE JACK CABLE PIGTAIL, HIGH TEMPERATURE	
NO. A.P. N/A	SIZE B	CODE IDENT NO. 26805
	SCALE 10:1	9952-2200-23
		REV 01 ₃
		SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1064473-1
 SHEET 1 OF 1 REV A