

**PM4319**

**OCTLIU-SH**

**Octal Short-Haul  
E1/T1/J1 Line Interface Device**

**Data Sheet**

**Proprietary and Confidential**

**Released**

**Issue No. 3: May 2002**

## Legal Information

### Copyright

Copyright 2002 PMC-Sierra, Inc. All rights reserved.

The information in this document is proprietary and confidential to PMC-Sierra, Inc., and for its customers' internal use. In any event, no part of this document may be reproduced or redistributed in any form without the express written consent of PMC-Sierra, Inc.

PMC-2012568 (R3), PMC-2020247, R2

### Disclaimer

None of the information contained in this document constitutes an express or implied warranty by PMC-Sierra, Inc. as to the sufficiency, fitness or suitability for a particular purpose of any such information or the fitness, or suitability for a particular purpose, merchantability, performance, compatibility with other parts or systems, of any of the products of PMC-Sierra, Inc., or any portion thereof, referred to in this document. PMC-Sierra, Inc. expressly disclaims all representations and warranties of any kind regarding the contents or use of the information, including, but not limited to, express and implied warranties of accuracy, completeness, merchantability, fitness for a particular use, or non-infringement.

In no event will PMC-Sierra, Inc. be liable for any direct, indirect, special, incidental or consequential damages, including, but not limited to, lost profits, lost business or lost data resulting from any use of or reliance upon the information, whether or not PMC-Sierra, Inc. has been advised of the possibility of such damage.

### Trademarks

[AALigator-32, SBI, TE-32, TEMAP-84 and PMC-Sierra are trademarks](#) of PMC-Sierra Inc.

Other product and company names mentioned herein may be the trademarks of their respective owners.

### Patents

#### Granted

The technology discussed in this document is protected by one or more of the following patent grants:

[U.S. Application No. US5973977. Canadian Application No. CA2242152.](#)

[Other relevant patent grants may also exist.](#)

## Contacting PMC-Sierra

PMC-Sierra  
8555 Baxter Place  
Burnaby, BC  
Canada V5A 4V7

Tel: +1 (604) 415-6000  
Fax: +1 (604) 415-6200

Document Information: [document@pmc-sierra.com](mailto:document@pmc-sierra.com)  
Corporate Information: [info@pmc-sierra.com](mailto:info@pmc-sierra.com)  
Technical Support: [apps@pmc-sierra.com](mailto:apps@pmc-sierra.com)  
Web Site: <http://www.pmc-sierra.com>

## Revision History

Issue No.	Issue Date	Details of Change
3	May 2002	Changes for Production Release. Moved document to new template. Change bars relative to issue 2.
<a href="#">2</a>	April 2002	Preliminary version.
<a href="#">1</a>	February 2002	Preview created from OCTLIU engineering document (PMC-2000964) issue 6.

## Table of Contents

Legal Information .....	2
Copyright .....	2
Disclaimer .....	2
Trademarks .....	2
Patents .....	2
Contacting PMC-Sierra .....	3
Revision History .....	4
Table of Contents .....	5
List of Registers .....	8
List of Figures .....	12
List of Tables .....	14
1 Features .....	16
1.1 Each Receiver Section Features .....	16
1.2 Each Transmitter Section Features .....	17
2 Applications .....	19
3 References .....	20
4 Application Examples .....	22
5 Block Diagram .....	23
6 Description .....	24
7 Pin Diagram .....	25
8 Pin Description .....	27
9 Functional Description .....	38
9.1 Octants .....	38
9.2 Receive Interface .....	38
9.3 Clock and Data Recovery (CDRC) .....	38
9.4 Receive Jitter Attenuator (RJAT) .....	40
9.5 T1 Inband Loopback Code Detector (IBCD) .....	41
9.6 T1 Pulse Density Violation Detector (PDVD) .....	41
9.7 Performance Monitor Counters (PMON) .....	41
9.8 Pseudo Random Binary Sequence Generation and Detection (PRBS) .....	41
9.9 T1 Inband Loopback Code Generator (XIBC) .....	42
9.10 Pulse Density Enforcer (XPDE) .....	42
9.11 Transmit Jitter Attenuator (TJAT) .....	42

9.12	Line Transmitter .....	47
9.13	Timing Options (TOPS) .....	47
9.14	External Analogue Interface Circuits .....	48
9.15	Scaleable Bandwidth Interconnect (SBI) Interface.....	49
9.16	SBI Extracter and PISO .....	49
9.17	SBI Inserter and SIPO .....	50
9.18	JTAG Test Access Port .....	50
9.19	Microprocessor Interface .....	50
10	Normal Mode Register Description .....	51
10.1	Normal Mode Register Memory Map .....	51
11	Test Features Description.....	164
11.1	JTAG Test Port.....	164
12	Operation.....	168
12.1	Configuring the OCTLIU-SH from Reset .....	168
12.2	Servicing Interrupts.....	168
12.3	Using the Performance Monitoring Features.....	169
12.4	Using the Transmit Line Pulse Generator .....	169
12.5	Using the Line Receiver .....	185
12.6	Using the PRBS Generator and Detector.....	192
12.7	Loopback Modes .....	193
12.8	Initialization of the RJAT and TJAT.....	194
12.9	Configuring the SBI Bus .....	194
12.10	JTAG Support .....	195
13	Functional Timing .....	202
13.1	SBI BUS Interface Timing.....	202
13.2	Line Code Violation Insertion.....	203
13.3	Alarm Interface .....	206
14	Absolute Maximum Ratings.....	207
15	D.C. Characteristics .....	208
16	Microprocessor Interface Timing Characteristics .....	211
17	OCTLIU-SH Timing Characteristics .....	215
17.1	RSTB Timing (Figure 28).....	215
17.2	XCLK Input Timing (Figure 29).....	215
17.3	SBI Interface (Figure 30 to Figure 32).....	216
17.4	Alarm Interface (Figure 33).....	218

---

17.5 JTAG Port Interface (Figure 34) .....	218
18 Ordering and Thermal Information .....	221
19 Mechanical Information .....	222
Notes.....	223

Downloaded by ahmed metwaly of siliconexpert on Monday, 06 January, 2003 06:07:43 AM

## List of Registers

Register 000H: Reset / Revision ID / Device ID .....	58
Register 001H: Global Configuration / Clock Monitor.....	59
Register 002H: Master Interrupt Source #1 .....	61
Register 003H: Master Interrupt Source #2.....	62
Register 004H: Master Test Control #1 .....	63
Register 005H: Master Test Control #2 .....	64
Register 006H: CSU Configuration.....	65
Register 008H, 088H, 108H, 188H, 208H, 288H, 308H, 388H: Receive Line Interface Configuration #1.....	67
Register 009H, 089H, 109H, 189H, 209H, 289H, 309H, 389H: Receive Line Interface Configuration #2.....	69
Register 00AH, 08AH, 10AH, 18AH, 20AH, 28AH, 30AH, 38AH: Transmit Line Interface Configuration.....	71
Register 00BH, 08BH, 10BH, 18BH, 20BH, 28BH, 30BH, 38BH: Transmit Timing Options / Clock Monitor / Pulse Template Selection.....	73
Register 00CH, 08CH, 10CH, 18CH, 20CH, 28CH, 30CH, 38CH: Line Interface Interrupt Source #1 / PMON Update.....	75
Register 00DH, 08DH, 10DH, 18DH, 20DH, 28DH, 30DH, 38DH: Line Interface Interrupt Source #2 .....	76
Register 00EH, 08EH, 10EH, 18EH, 20EH, 28EH, 30EH, 38EH: Line Interface Diagnostics .....	77
Register 00FH, 08FH, 10FH, 18FH, 20FH, 28FH, 30FH, 38FH: Line Interface PRBS Position .....	79
Register 310H: INSBI Control.....	80
Register 311H: INSBI FIFO Underrun Interrupt Status .....	82
Register 312H: INSBI FIFO Overrun Interrupt Status .....	83
Register 313H – 31AH: INSBI Page A Octant to Tributary Mapping #1 - #8 .....	84
Register 31BH – 322H: INSBI Page B Octant to Tributary Mapping #1 - #8 .....	85
Register 323H: INSBI Link Enable.....	86
Register 324H: INSBI Link Enable Busy.....	87
Register 325H – 32CH: INSBI Tributary Control #1 – #8 .....	88
Register 32DH: INSBI Minimum Depth.....	89
Register 32EH: INSBI FIFO Thresholds.....	90
Register 331H: INSBI Depth Check Interrupt Status.....	91
Register 332H: INSBI Master Interrupt Status.....	92
Register 390H: EXSBI Control.....	93



Register 391H: EXSBI FIFO Underrun Interrupt Status .....	95
Register 392H: EXSBI FIFO Overrun Interrupt Status .....	96
Register 393H: EXSBI Parity Error Interrupt Reason .....	97
Register 394H: EXSBI Depth Check Interrupt Status.....	98
Register 395H: EXSBI Master Interrupt Status .....	99
Register 396H: EXSBI Minimum Depth .....	100
Register 397H: EXSBI FIFO Thresholds .....	101
Register 398H: EXSBI Link Enable .....	102
Register 399H: EXSBI Link Enable Busy .....	103
Register 3A0H – 3A7H: EXSBI Tributary Control #1 – #8.....	104
Register 3A8H – 3AFH: EXSBI Page A Octant to Tributary Mapping #1 - #8.....	105
Register 3B0H to 3B7H: EXSBI Page B Octant to Tributary Mapping #1 - #8.....	106
Register 043H, 0C3H, 143H, 1C3H, 243H, 2C3H, 343H, 3C3H: T1 PDVD Interrupt Enable/Status .....	107
Register 045H, 0C5H, 145H, 1C5H, 245H, 2C5H, 345H, 3C5H: T1 XPDE Interrupt Enable/Status .....	108
Register 046H, 0C6H, 146H, 1C6H, 246H, 2C6H, 346H, 3C6H: T1 XIBC Control.....	110
Register 047H, 0C7H, 147H, 1C7H, 247H, 2C7H, 347H, 3C7H: T1 XIBC Loopback Code .....	111
Register 048H, 0C8H, 148H, 1C8H, 248H, 2C8H, 348H, 3C8H: RJAT Interrupt Status .....	112
Register 049H, 0C9H, 149H, 1C9H, 249H, 2C9H, 349H, 3C9H: RJAT Reference Clock Divisor (N1) Control.....	113
Register 04AH, 0CAH, 14AH, 1CAH, 24AH, 2CAH, 34AH, 3CAH: RJAT Output Clock Divisor (N2) Control .....	114
Register 04BH, 0CBH, 14BH, 1CBH, 24BH, 2CBH, 34BH, 3CBH: RJAT Configuration.....	115
Register 04CH, 0CCH, 14CH, 1CCH, 24CH, 2CCH, 34CH, 3CCH: TJAT Interrupt Status .....	117
Register 04DH, 0CDH, 14DH, 1CDH, 24DH, 2CDH, 34DH, 3CDH: TJAT Reference Clock Divisor (N1) Control.....	118
Register 04EH, 0CEH, 14EH, 1CEH, 24EH, 2CEH, 34EH, 3CEH: TJAT Output Clock Divisor (N2) Control .....	119
Register 04FH, 0CFH, 14FH, 1CFH, 24FH, 2CFH, 34FH, 3CFH: TJAT Configuration.....	120
Register 050H, 0D0H, 150H, 1D0H, 250H, 2D0H, 350H, 3D0H: IBCD Configuration.....	122
Register 051H, 0D1H, 151H, 1D1H, 251H, 2D1H, 351H, 3D1H: IBCD Interrupt Enable/Status.....	123

Register 052H, 0D2H, 152H, 1D2H, 252H, 2D2H, 352H, 3D2H: IBCD Activate Code.....	125
Register 053H, 0D3H, 153H, 1D3H, 253H, 2D3H, 353H, 3D3H: IBCD Deactivate Code .....	126
Register 054H, 0D4H, 154H, 1D4H, 254H, 2D4H, 354H, 3D4H: CDRC Configuration.....	127
Register 055H, 0D5H, 155H, 1D5H, 255H, 2D5H, 355H, 3D5H: CDRC Interrupt Control.....	129
Register 056H, 0D6H, 156H, 1D6H, 256H, 2D6H, 356H, 3D6H: CDRC Interrupt Status .....	130
Register 057H, 0D7H, 157H, 1D7H, 257H, 2D7H, 357H, 3D7H: CDRC Alternate Loss of Signal Status.....	131
Register 058H, 0D8H, 158H, 1D8H, 258H, 2D8H, 358H, 3D8H: PMON Interrupt Enable/Status.....	132
Register 05EH, 0DEH, 15EH, 1DEH, 25EH, 2DEH, 35EH, 3DEH: PMON LCV Count (LSB) .....	133
Register 05FH, 0DFH, 15FH, 1DFH, 25FH, 2DFH, 35FH, 3DFH: PMON LCV Count (MSB) .....	134
Register 060H, 0E0H, 160H, 1E0H, 260H, 2E0H, 360H, 3E0H: PRBS Generator/Checker Control.....	135
Register 061H, 0E1H, 161H, 1E1H, 261H, 2E1H, 361H, 3E1H: PRBS Checker Interrupt Enable/Status .....	137
Register 062H, 0E2H, 162H, 1E2H, 262H, 2E2H, 362H, 3E2H: PRBS Pattern Select .....	139
Register 064H, 0E4H, 164H, 1E4H, 264H, 2E4H, 364H, 3E4H: PRBS Error Count #1.....	140
Register 065H, 0E5H, 165H, 1E5H, 265H, 2E5H, 365H, 3E5H: PRBS Error Count #2.....	141
Register 066H, 0E6H, 166H, 1E6H, 266H, 2E6H, 366H, 3E6H: PRBS Error Count #3.....	142
Register 068H, 0E8H, 168H, 1E8H, 268H, 2E8H, 368H, 3E8H: XLPG Control/Status .....	143
Register 069H, 0E9H, 169H, 1E9H, 269H, 2E9H, 369H, 3E9H: XLPG Pulse Waveform Scale.....	144
Register 06AH, 0EAH, 16AH, 1EAH, 26AH, 2EAH, 36AH, 3EAH: XLPG Pulse Waveform Storage Write Address #1 .....	145
Register 06BH, 0EBH, 16BH, 1EBH, 26BH, 2EBH, 36BH, 3EBH: XLPG Pulse Waveform Storage Write Address #2 .....	146
Register 06CH, 0ECH, 16CH, 1ECH, 26CH, 2ECH, 36CH, 3ECH: XLPG Pulse Waveform Storage Data .....	147
Register 06DH, 0EDH, 16DH, 1EDH, 26DH, 2EDH, 36DH, 3EDH: XLPG Fuse Control.....	148

Register 070H, 0F0H, 170H, 1F0H, 270H, 2F0H, 370H, 3F0H: RLPS Configuration and Status .....	149
Register 071H, 0F1H, 171H, 1F1H, 271H, 2F1H, 371H, 3F1H: RLPS ALOS Detection/Clearance Threshold .....	151
Register 072H, 0F2H, 172H, 1F2H, 272H, 2F2H, 372H, 3F2H: RLPS ALOS Detection Period .....	152
Register 073H, 0F3H, 173H, 1F3H, 273H, 2F3H, 373H, 3F3H: RLPS ALOS Clearance Period .....	153
Register 074H, 0F4H, 174H, 1F4H, 274H, 2F4H, 374H, 3F4H: RLPS Equalization Indirect Address .....	154
Register 075H, 0F5H, 175H, 1F5H, 275H, 2F5H, 375H, 3F5H: RLPS Equalization Read/WriteB Select.....	155
Register 076H, 0F6H, 176H, 1F6H, 276H, 2F6H, 376H, 3F6H: RLPS Equalizer Loop Status and Control .....	156
Register 077H, 0F7H, 177H, 1F7H, 277H, 2F7H, 377H, 3F7H: RLPS Equalizer Configuration.....	157
Register 078H, 0F8H, 178H, 1F8H, 278H, 2F8H, 378H, 3F8H: RLPS Equalization Indirect Data.....	158
Register 079H, 0F9H, 179H, 1F9H, 279H, 2F9H, 379H, 3F9H: RLPS Equalization Indirect Data.....	159
Register 07AH, 0FAH, 17AH, 1FAH, 27AH, 2FAH, 37AH, 3FAH: RLPS Equalization Indirect Data.....	160
Register 07BH, 0FBH, 17BH, 1FBH, 27BH, 2FBH, 37BH, 3FBH: RLPS Equalization Indirect Data.....	161
Register 07CH, 0FCH, 17CH, 1FCH, 27CH, 2FCH, 37CH, 3FCH: RLPS Equalizer Voltage Thresholds #1 .....	162
Register 07DH, 0FDH, 17DH, 1FDH, 27DH, 2FDH, 37DH, 3FDH: RLPS Equalizer Voltage Thresholds #2.....	163

## List of Figures

Figure 1	High Density T1/E1 Framer/Transceiver Application .....	22
Figure 2	High Density Leased Line Circuit Emulation Application .....	22
Figure 3	Metro Optical Access Equipment .....	22
Figure 4	OCTLIU-SH Block Diagram.....	23
Figure 5	Pin Diagram (Bottom View) .....	25
Figure 6	T1 Jitter Tolerance.....	39
Figure 7	Compliance with ITU-T Specification G.823 for E1 Input Jitter .....	40
Figure 8	TJAT Jitter Tolerance .....	44
Figure 9	TJAT Minimum Jitter Tolerance vs. XCLK Accuracy.....	45
Figure 10	TJAT Jitter Transfer.....	46
Figure 11	External Analogue Interface Circuits .....	48
Figure 12	Transmit Timing Options .....	74
Figure 13	Line Loopback .....	193
Figure 14	Diagnostic Digital Loopback .....	194
Figure 15	Boundary Scan Architecture.....	195
Figure 16	TAP Controller Finite State Machine .....	197
Figure 17	Input Observation Cell (IN_CELL).....	200
Figure 18	Output Cell (OUT_CELL) or Enable Cell (ENABLE) .....	200
Figure 19	Bidirectional Cell (IO_CELL).....	201
Figure 20	Layout of Output Enable and Bidirectional Cells.....	201
Figure 21	SBI BUS Functional Timing.....	202
Figure 22	B8ZS Line Code Violation Insertion .....	203
Figure 23	HDB3 Line Code Violation Insertion.....	204
Figure 24	AMI Line Code Violation Insertion .....	205
Figure 25	LOS Alarm Serial Output.....	206
Figure 26	Microprocessor Interface Read Timing .....	212
Figure 27	Microprocessor Interface Write Timing.....	213
Figure 28	RSTB Timing .....	215
Figure 29	XCLK Input Timing .....	215
Figure 30	SBI Frame Pulse Timing.....	216
Figure 31	SBI ADD BUS Timing .....	217
Figure 32	SBI DROP BUS Timing .....	217
Figure 33	Alarm Interface Timing .....	218

---

Figure 34 JTAG Port Interface Timing .....219

Downloaded by ahmed metwaly of siliconexpert on Monday, 06 January, 2003 06:07:43 AM

## List of Tables

Table 1	External Component Descriptions .....	48
Table 2	Normal Mode Register Memory Map.....	51
Table 3	Clock Synthesis Mode .....	65
Table 4	TJAT FIFO Output Clock Source.....	73
Table 5	TJAT PLL Source .....	73
Table 6	EXSBI Clock Generation Options.....	104
Table 7	Transmit In-band Code Length.....	110
Table 8	Recommended N1/N2 values.....	114
Table 9	Recommended N1/N2 values.....	119
Table 10	Loopback Code Configurations .....	122
Table 11	Loss of Signal Thresholds .....	128
Table 12	Transmit Output Amplitude.....	144
Table 13	ALOS Detection/Clearance Thresholds.....	151
Table 14	Boundary Scan Register.....	165
Table 15	Default Settings .....	168
Table 16	T1.102 Transmit Waveform Values for T1 Short Haul (0 – 110 ft.).....	171
Table 17	T1.102 Transmit Waveform Values for T1 Short Haul (110 – 220 ft.).....	172
Table 18	T1.102 Transmit Waveform Values for T1 Short Haul (220 – 330 ft.).....	173
Table 19	T1.102 Transmit Waveform Values for T1 Short Haul (330 – 440 ft.).....	174
Table 20	T1.102 Transmit Waveform Values for T1 Short Haul (440 – 550 ft.).....	175
Table 21	T1.102 Transmit Waveform Values for T1 Short Haul (550 – 660 ft.).....	176
Table 22	TR62411 Transmit Waveform Values for T1 Short Haul (0 – 110 ft.).....	177
Table 23	TR62411 Transmit Waveform Values for T1 Short Haul (110 – 220 ft.).....	178
Table 24	TR62411 Transmit Waveform Values for T1 Short Haul (220 – 330 ft.).....	179
Table 25	TR62411 Transmit Waveform Values for T1 Short Haul (330 – 440 ft.).....	180
Table 26	TR62411 Transmit Waveform Values for T1 Short Haul (440 – 550 ft.).....	181
Table 27	TR62411 Transmit Waveform Values for T1 Short Haul (550 – 660 ft.).....	182
Table 28	Transmit Waveform Values for E1 120 Ohm.....	183
Table 29	Transmit Waveform Values for E1 75 Ohm.....	184
Table 30	RLPS Register Programming .....	185

Table 31	RLPS Equalizer RAM Table (T1 mode).....	186
Table 32	RLPS Equalizer RAM Table (E1 mode) .....	189
Table 33	Absolute Maximum Ratings .....	207
Table 34	D.C. Characteristics.....	208
Table 35	Microprocessor Interface Read Access.....	211
Table 36	Microprocessor Interface Write Access .....	213
Table 37	RTSB Timing .....	215
Table 38	XCLK Input Timing.....	215
Table 39	Clocks and SBI Frame Pulse.....	216
Table 40	SBI ADD BUS .....	216
Table 41	SBI DROP BUS .....	217
Table 42	Alarm Interface .....	218
Table 43	JTAG Port Interface.....	218
Table 44	Ordering Information.....	221
Table 45	OCTLIU-SH Theta Jc.....	221
Table 46	OCTLIU-SH Junction Temperature .....	221
Table 47	OCTLIU-SH Theta Ja vs. Airflow .....	221

## 1 Features

- Monolithic device which integrates eight T1/J1 or E1 short haul line interface circuits.
- Software switchable between T1/J1 and E1 operation on a per-device basis.
- Meets or exceeds T1/J1 and E1 short haul network access specifications including ANSI T1.102, T1.403, T1.408, AT&T TR 62411, ITU-T G.703, G.704 as well as ETSI 300-011, CTR-4, CTR-12 and CTR-13.
- Provides encoding and decoding of B8ZS, HDB3 and AMI line codes.
- Provides receive equalization, clock recovery and line performance monitoring.
- Provides transmit and receive jitter attenuation.
- Provides digitally programmable short haul transmit templates.
- Provides a selectable, per channel independent de-jittered T1 or E1 recovered clock for system timing and redundancy.
- Provides PRBS generators and detectors on each tributary for error testing at DS1 and E1 rates as recommended in ITU-T O.151.
- Provides parallel Scaleable Bandwidth Interconnect (SBI) interfaces on the system side.
- Provides an 8-bit microprocessor bus interface for configuration, control, and status monitoring.
- Uses line rate system clock.
- Provides an IEEE 1149.1 (JTAG) compliant Test Access Port (TAP) and controller for boundary scan test.
- Implemented in a low power 3.3 V tolerant 1.8/3.3 V CMOS technology.
- Available in a high density 288-pin Tape-SBGA (23 mm by 23 mm) package.
- Provides a -40°C to +85°C Industrial temperature operating range.

### 1.1 Each Receiver Section Features

- Supports T1 signal reception for distances with up to 12 dB of cable attenuation at nominal conditions using PIC 22 gauge cable emulation.
- Supports E1 signal reception for distances with up to 12 dB of cable attenuation at nominal conditions using PIC 22 gauge cable emulation.
- Supports G.772 compliant non-intrusive protected monitoring points.
- Recovers clock and data using a digital phase locked loop for high jitter tolerance.
- Tolerates more than 0.4 UI peak-to-peak; high frequency jitter as required by AT&T TR 62411 and Bellcore TR-TSY-000170.
- Outputs parallel data in SBI bus format.



- Performs B8ZS or AMI decoding when processing a bipolar DS-1 signal and HDB3 or AMI decoding when processing a bipolar E1 signal.
- Detects line code violations (LCVs), B8ZS/HDB3 line code signatures, and 4 (E1), 8 (T1+B8ZS) or 16 (T1 AMI) successive zeros.
- Accumulates up to 8191 line code violations (LCVs), for performance monitoring purposes, over accumulation intervals defined by the period between software write accesses to the LCV register.
- Detects loss of signal (LOS), which is defined as 10, 15, 31, 63, or 175 successive zeros.
- Detects programmable inband loopback activate and deactivate code sequences received in the DS-1 data stream when they are present for 5.1 seconds. Optionally, enters loopback mode automatically on detection of an inband loopback code.
- Detects violations of the ANSI T1.403 12.5% pulse density rule over a moving 192-bit window.
- A pseudo-random sequence user selectable from  $2^{11} - 1$ ,  $2^{15} - 1$  or  $2^{20} - 1$ , may be detected in the T1/E1 stream in either the receive or transmit directions. The detector counts pattern errors using a 24-bit saturating PRBS error counter.

## 1.2 Each Transmitter Section Features

- Supports transfer of transmitted single rail PCM and signaling data from 1.544 Mbit/s and 2.048 Mbit/s backplane buses.
- Generates DSX-1 shorthaul pulses with programmable pulse shape compatible with AT&T, ANSI and ITU requirements.
- Generates E1 pulses compliant to G.703 recommendations.
- Provides a digitally programmable pulse shape extending up to 5 transmitted bit periods for custom short haul pulse shaping applications.
- Provides line outputs that are current limited and may be tristated for protection or in redundant applications.
- Provides a digital phase locked loop for generation of a low jitter transmit clock complying with all jitter attenuation, jitter transfer and residual jitter specifications of AT&T TR 62411 and ETSI TBR 12 and TBR 13.
- Provides a FIFO buffer for jitter attenuation and rate conversion in the transmit path.
- Allows bipolar violation (BPV) transparent operation for error restoring regenerator applications.
- Allows bipolar violation (BPV) insertion for diagnostic testing purposes.
- Supports all ones transmission for alarm indication signal (AIS) generation.
- Accepts parallel data from the SBI interface.
- Performs B8ZS or AMI encoding when processing an SBI-sourced DS-1 signal and HDB3 or AMI encoding when processing an SBI-sourced E1 signal.

- A pseudo-random sequence user selectable from  $2^{11} - 1$ ,  $2^{15} - 1$  or  $2^{20} - 1$ , may be inserted into or detected from the T1 or E1 stream in either the receive or transmit directions.
- Detects violations of the ANSI T1.403 12.5% pulse density rule over a moving 192-bit window and optionally stuffs ones to maintain minimum ones density.
- Supports transmission of a programmable unframed inband loopback code sequence.

## 2 Applications

- Metro Optical Access Equipment.
- Edge Router Linecards.
- Multiservice ATM Switch Linecards.
- 3G Base Station Controllers (BSC).
- 3G Base Transceiver Stations (BTS).
- Digital Private Branch Exchanges (PBX).
- Digital Access Cross-Connect Systems (DACS) and Electronic DSX Cross-Connect Systems (EDSX).
- Test Equipment.

### 3 References

1. ANSI – T1.102-1993 – American National Standard for Telecommunications – Digital Hierarchy – Electrical Interfaces.
2. ANSI – T1.107-1995 – American National Standard for Telecommunications – Digital Hierarchy – Formats Specification.
3. ANSI – T1.403-1999 – American National Standard for Telecommunications – Carrier to Customer Installation – DS-1 Metallic Interface Specification.
4. ANSI – T1.408-1990 – American National Standard for Telecommunications – Integrated Services Digital Network (ISDN) Primary Rate – Customer Installation Metallic Interfaces Layer 1 Specification.
5. AT&T – TR 62411 – Accunet T1.5 – Service Description and Interface Specification, December 1990.
6. AT&T – TR 62411 – Accunet T1.5 – Service Description and Interface Specification, Addendum 1, March 1991.
7. AT&T – TR 62411 – Accunet T1.5 – Service Description and Interface Specification, Addendum 2, October 1992.
8. TR-TSY-000170 – Bellcore – Digital Cross-Connect System Requirements and Objectives, Issue 1, November 1985.
9. TR-N1WT-000233 – Bell Communications Research – Wideband and Broadband Digital Cross-Connect Systems Generic Criteria, Issue 3, November 1993.
10. TR-NWT-000303 – Bell Communications Research – Integrated Digital Loop Carrier Generic Requirements, Objectives, and Interface, Issue 2, December, 1992.
11. TR-TSY-000499 – Bell Communications Research – Transport Systems Generic Requirements (TSGR): Common Requirement, Issue 5, December, 1993.
12. ETSI – ETS 300 011 – ISDN Primary Rate User-Network Interface Specification and Test Principles, 1992.
13. ETSI – ETS 300 233 – Access Digital Section for ISDN Primary Rates.
14. ETSI – CTR 4 – Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN primary rate access, November 1995.
15. ETSI – CTR 12 – Business Telecommunications (BT); Open Network Provision (ONP) technical requirements; 2 048 kbit/s digital unstructured leased lines (D2048U) Attachment requirements for terminal equipment interface, December 1993.

16. ETSI – CTR 13 – Business Telecommunications (BTC); 2 048 kbit/s digital structured leased lines (D2048S); Attachment requirements for terminal equipment interface, January 1996.
17. FCC Rules – Part 68.308 – Signal Power Limitations.
18. ITU-T – Recommendation G.703 – Physical/Electrical Characteristics of Hierarchical Digital Interface, Geneva, 1998.
19. ITU-T – Recommendation G.704 – Synchronous Frame Structures Used at Primary Hierarchical Levels, July 1998.
20. ITU-T Recommendation G.772 – Protected Monitoring Points Provided on Digital Transmission Systems, 1992.
21. ITU-T – Recommendation G.775 – Loss of Signal (LOS), November 1998.
22. ITU-T Recommendation G.823, - The Control of Jitter and Wander Within Digital Networks Which are Based on the 2048 kbit/s Hierarchy, 1993.
23. ITU-T – Recommendation I.431 – Primary Rate User-Network Interface – Layer 1 Specification, 1993.
24. ITU-T Recommendation O.151, - Error Performance Measuring Equipment For Digital Systems at the Primary Bit Rate and Above, 1992.
25. TTC Standard JT-G703 – Physical/Electrical Characteristics of Hierarchical Digital Interfaces, 1995.
26. TTC Standard JT-G704 – Frame Structures on Primary and Secondary Hierarchical Digital Interfaces, 1995.
27. TTC Standard JT-I431 – ISDN Primary Rate User-Network Interface Layer 1 – Specification, 1995.
28. Nippon Telegraph and Telephone Corporation – Technical Reference for High-Speed Digital Leased Circuit Services, Third Edition, 1990.
29. ITU-T Recommendation G.824, The Control of Jitter and Wander within Digital Networks which are based on the 1544 kbit/s Hierarchy (March 1993).
30. [PMC-Sierra Application Note: "Configuring SBI Compatible Devices", PMC-2020180.](#)

## 4 Application Examples

Figure 1 High Density T1/E1 Framer/Transceiver Application

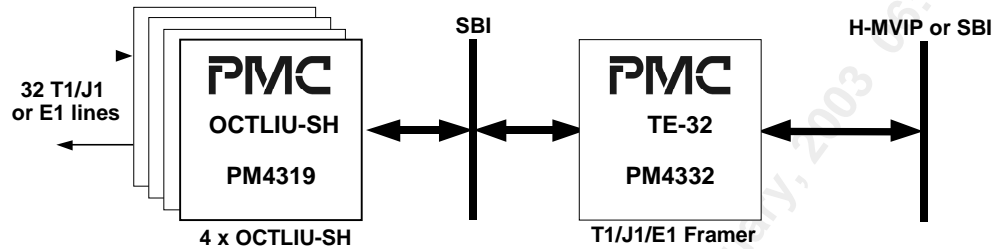


Figure 2 High Density Leased Line Circuit Emulation Application



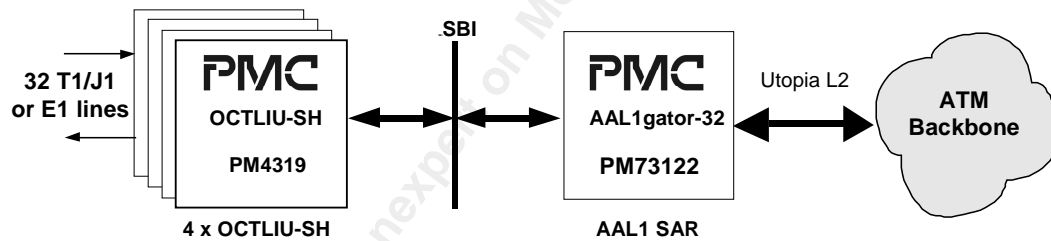


Figure 3 Metro Optical Access Equipment

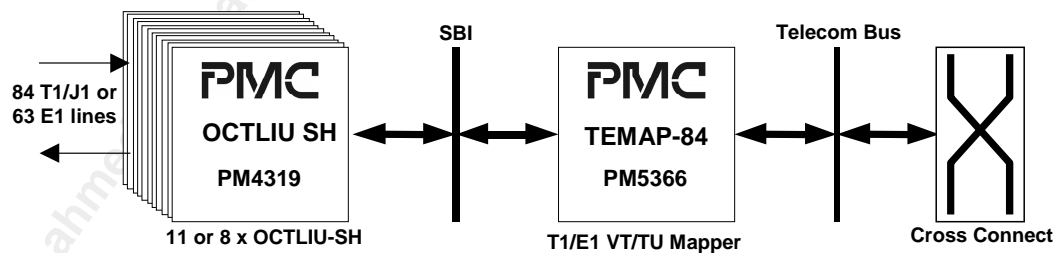

## 5 Block Diagram

Figure 4 OCTLIU-SH Block Diagram

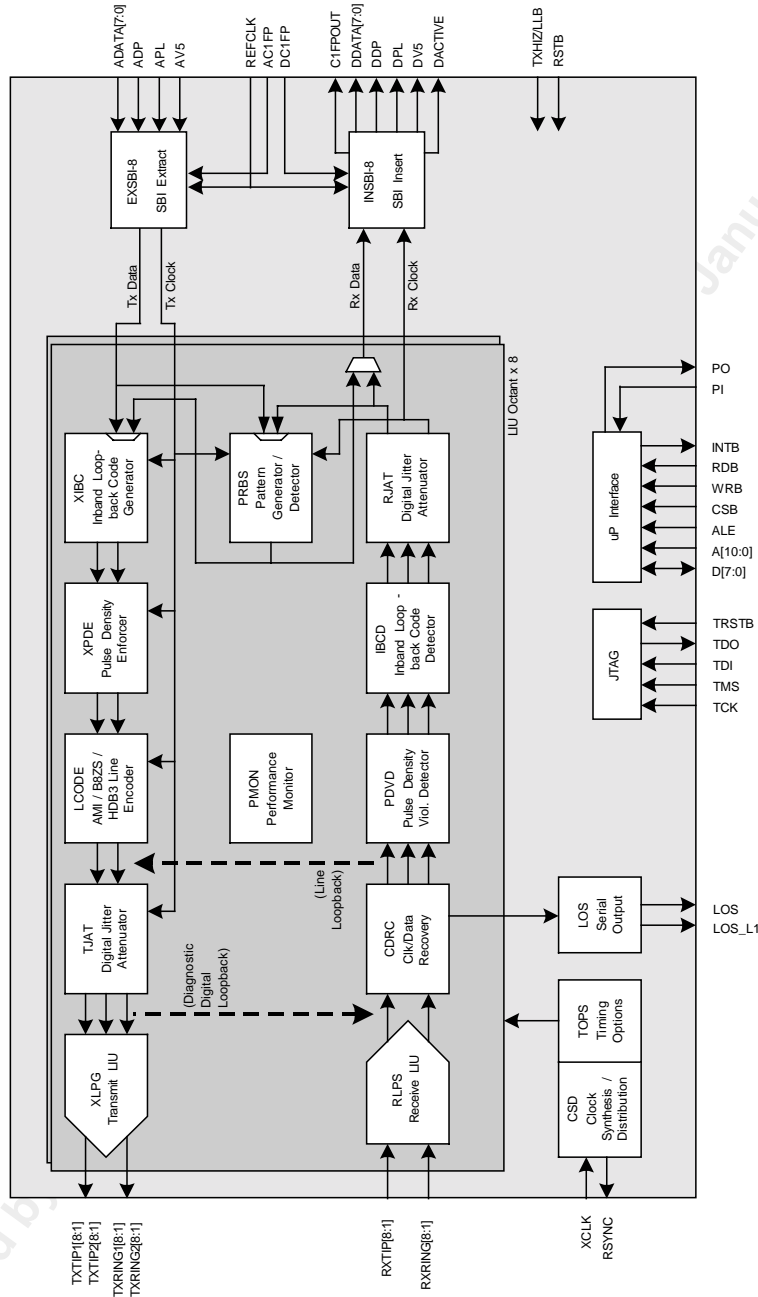

## 6 Description

The PM4319 Octal Short Haul E1/T1/J1 Line Interface Device (OCTLIU-SH) is a monolithic integrated circuit suitable for use in short haul T1, J1 and E1 systems with a minimum of external circuitry. The OCTLIU-SH is configurable via microprocessor control, allowing feature selection without changes to external wiring.

Analogue circuitry is provided to allow direct reception of short haul E1 and T1 compatible signals with up to 12 dB cable loss (at 1.024 MHz) in E1 mode or up to 12 dB cable loss (at 772 kHz) in T1 mode using a minimum of external components. Typically, only line protection, a transformer and a line termination resistor are required.

The OCTLIU-SH recovers clock and data from the line. Decoding of AMI, HDB3 and B8ZS line codes is supported. In T1 mode, the OCTLIU-SH also detects the presence of in-band loop back codes.

The OCTLIU-SH supports detection of loss of signal, pulse density violation and line code violation alarm conditions. Line code violations are accumulated for performance monitoring purposes.

Internal analogue circuitry allows direct transmission of short haul T1 and E1 compatible signals using a minimum of external components. Typically, only line protection, a transformer and an optional line termination resistor are required. Digitally programmable pulse shaping allows transmission of DSX-1 compatible signals up to 655 feet from the cross-connect, E1 short haul pulses into 120 ohm twisted pair or 75 ohm coaxial cable. In addition, the programmable pulse shape extending over 5-bit periods allows customization of short haul line interface circuits to application requirements.

Each channel of the OCTLIU-SH can generate a low jitter transmit clock from the input clock source and also provide jitter attenuation in the receive path. A low jitter recovered T1 clock can be routed outside the OCTLIU-SH for network timing applications.

The OCTLIU-SH supports an 8-bit parallel SBI interface for interfacing to high-density framers.

The OCTLIU-SH may be configured, controlled and monitored via a generic 8-bit microprocessor bus through which all internal registers are accessed.



## 7 Pin Diagram

The OCTLIU-SH is packaged in a 288-pin Tape-SBGA package having a body size of 23mm by 23mm.

**Figure 5 Pin Diagram (Bottom View)**

	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1			
A	ALE	VSS	D[1]	D[2]	D[4]	VSS	VDD1V8	TAVS2[1]	TXRING2 [1]	TXRING1 [1]	TX TIP1[1]	TX TIP2[1]	TX TIP2[8]	TX TIP1[8]	TXRING1 [8]	TXRING2 [8]	RSTB	LOS	RES_NC	RES_NC	VDD3V3	TDI	A		
B	VDD3V3	VDD3V3	CSB	D[0]	D[3]	D[6]	RES_1	QAVS[4]	RES_0	TAVD3[1]	TAVS3[8]	TAVD2[8]	QAVD[4]	VDD1V8	VDD3V3	RES_0	RES_0	RES_NC	PI	RES_0	TDO	RES_0	B		
C	A[8]	A[9]	A[10]	RDB	VDD3V3	VDD3V3	VSS	D[7]	CAVD	TAVD2[1]	TAVS3[1]	TAVD3[8]	TAVS2[8]	VSS	VSS	LOS_L1	RES_0	RES_NC	RES_NC	VSS	TCK	TXHZLLB	C		
D	A[4]	A[5]	A[6]	VSS	WRB	INTB	VSS	D[5]	CAVS	TAVS1[1]	TAVD1[1]	TAVD1[8]	TAVS1[8]	XCLK	RSYNC	VDD3V3	PO	VSS	NC	TMS	VDD3V3	RAVS1[8]	D		
E	A[0]	A[1]	A[2]	A[7]																	TRSTB	VSS	RAVD2[8]	RAVD2[7]	E
F	RAVS1[1]	RAVD2[1]	QAVD[1]	A[3]																	QAVS[3]	RES_0	RAVS2[7]	TXRING2 [7]	F
G	RAVD1[1]	RXTIP[1]	RAVS2[1]	VDD3V3																	RAVS2[8]	RXTIP[8]	RAVS1[7]	TXRING1 [7]	G
H	TXRING2 [2]	RAVD2[2]	RAVS2[2]	RXRING1 [1]																	RXRING8 [1]	RAVD1[8]	RAVD1[7]	TX TIP1[7]	H
J	TXRING1 [2]	RXTIP[2]	RAVS1[2]	RXRING2 [1]																	RXRING7 [1]	RXTIP[7]	TAVS2[7]	TX TIP2[7]	J
K	TX TIP1[2]	RAVD1[2]	TAVS2[2]	TAVS1[2]																	TAVS1[7]	TAVD2[7]	TAVD3[7]	TX TIP2[6]	K
L	TX TIP2[2]	TAVD2[2]	TAVD3[2]	TAVD1[2]																	TAVD1[7]	TAVS3[7]	TAVS3[6]	TX TIP1[6]	L
M	TX TIP2[3]	TAVS2[2]	TAVS3[3]	TAVD1[3]																	TAVD1[6]	TAVD3[6]	TAVD2[6]	TXRING1 [6]	M
N	TX TIP1[3]	TAVD3[3]	TAVD2[3]	TAVS1[3]																	TAVS1[6]	TAVS2[6]	RAVD1[6]	TXRING2 [6]	N
P	TXRING1 [3]	TAVS2[3]	RAVD1[3]	RXRING3 [1]																	RXRING6 [1]	RAVS1[6]	RAVD2[6]	RXTIP[6]	P
R	TXRING2 [3]	RXTIP[3]	RAVD2[3]	RXTIP[4]																	RXTIP[5]	RXRING5 [1]	RAVD1[5]	RAVS2[6]	R
T	RAVS1[3]	RAVS2[3]	RAVD1[4]	RAVS2[4]																	QAVD[3]	RAVS2[5]	RAVD2[5]	RAVS1[5]	T
U	RXRING4 [1]	RAVS1[4]	RAVD2[4]	RES_0																	RES_0	RES_0	ADATA[7]	VSS	U
V	RES_0	QAVS[1]	VSS	ADATA[1]																	AV5	RES_0	RES_0	RES_0	V
W	ADATA[0]	REFCLK	RES_0	VDD3V3	ADP	VDD3V3	VDD3V3	C1FP0UT	VSS	TAVS1[4]	TAVD1[4]	TAVD1[5]	TAVS1[5]	VDD1V8	DDATA[4]	RES_NC	RES_NC	DDATA[7]	NC	VDD3V3	RES_0	ADATA[6]	W		
Y	AC1FP	ADATA[2]	VDD3V3	ADATA[3]	VSS	DDATA[1]	RES_NC	VDD3V3	DDP	TAVS2[4]	TAVD3[4]	TAVS3[5]	TAVD2[5]	RES_0	DPL	VDD3V3	VSS	DDATA[6]	DACTIVE	VSS	ADATA[4]	ADATA[5]	Y		
AA	RES_0	DC1FP	VSS	RES_NC	RES_NC	VSS	VSS	RES_NC	VDD1V8	QAVD[2]	TAVD2[4]	TAVS3[4]	TAVD3[5]	TAVS2[5]	QAVS[2]	VSS	VSS	DDATA[5]	RES_NC	VDD3V3	VSS	APL	AA		
AB	VSS	VSS	VSS	DDATA[0]	RES_NC	RES_NC	DDATA[2]	DDATA[3]	TXRING2 [4]	TXRING1 [4]	TX TIP1[4]	TX TIP2[4]	TX TIP2[5]	TX TIP1[5]	TXRING1 [5]	TXRING2 [5]	RES_NC	DV5	VDD3V3	VSS	RES_NC	VDD3V3	AB		
	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1			

Downloaded by ahmed metwaly of siliconexpert on Monday, 06 January, 2003 06:07:44 AM

## 8 Pin Description

By convention, where a bus of eight pins indexed [8:1] is present, the index indicates to which octant the pin applies. With RXTIP[8:1], for example, RXTIP[1] applies to octant #1, RXTIP[2] applies to octant #2, etc.

Pin Name	Type	Pin No.	Function
<b>SBI System Side Interface</b>			
REFCLK	Input	W21	The SBI reference clock signal (REFCLK) provides reference timing for the SBI ADD and DROP busses. REFCLK is nominally a 50% duty cycle clock of frequency 19.44 MHz $\pm$ 50ppm.
AC1FP	Input	Y22	The SBI ADD bus C1 octet frame pulse signal (AC1FP) provides frame synchronisation for devices connected via an SBI interface. AC1FP must be asserted for 1 REFCLK cycle every 500 $\mu$ s or multiples thereof (i.e. every 9720 n REFCLK cycles, where n is a positive integer). All devices connected to the SBI ADD bus must be synchronised to a AC1FP signal from a single source. AC1FP is sampled on the rising edge of REFCLK.
DC1FP	Input	AA21	The SBI DROP bus C1 octet frame pulse signal (DC1FP) provides frame synchronisation for devices connected via an SBI interface. DC1FP must be asserted for 1 REFCLK cycle every 500 $\mu$ s or multiples thereof (i.e. every 9720 n REFCLK cycles, where n is a positive integer). All devices connected to the SBI DROP bus must be synchronised to a DC1FP signal from a single source. DC1FP is sampled on the rising edge of REFCLK.
C1FPOUT	Output	W15	The C1 octet frame pulse output signal (C1FPOUT) may be used to provide frame synchronisation for devices interconnected via an SBI interface. C1FPOUT is asserted for 1 REFCLK cycle every 500 $\mu$ s (i.e. every 9720 REFCLK cycles). If C1FPOUT is used for synchronisation, it must be connected to the A/DC1FP inputs of all the devices connected to the SBI ADD or DROP bus. C1FPOUT is updated on the rising edge of REFCLK.
ADATA[0] ADATA[1] ADATA[2] ADATA[3] ADATA[4] ADATA[5] ADATA[6] ADATA[7]	Input	W22 V19 Y21 Y19 Y2 Y1 W1 U2	The SBI ADD bus data signals (ADATA[7:0]) contain time division multiplexed transmit data from up to 84 independently timed links. Link data is transported as T1 or E1 tributaries within the SBI TDM bus structure. The OCTLIU-SH may be configured to extract data from up to 8 tributaries within the structure. ADATA[7:0] are sampled on the rising edge of REFCLK.

Pin Name	Type	Pin No.	Function
ADP	Input	W18	<p>The SBI ADD bus parity signal (ADP) carries the even or odd parity for the ADD bus signals. The parity calculation encompasses the ADATA[7:0], APL and AV5 signals.</p> <p>Multiple devices can drive the SBI ADD bus at uniquely assigned tributary column positions. This parity signal is intended to detect accidental driver clashes in the column assignment.</p> <p>ADP is sampled on the rising edge of REFCLK.</p>
APL	Input	AA1	<p>The SBI ADD bus payload signal (APL) indicates valid data within the SBI TDM bus structure. This signal is asserted during all octets making up a tributary. This signal may be asserted during the V3 octet within a tributary to accommodate negative timing adjustments between the tributary rate and the fixed TDM bus structure. This signal may be deasserted during the octet following the V3 octet within a tributary to accommodate positive timing adjustments between the tributary rate and the fixed TDM bus structure.</p> <p>APL is sampled on the rising edge of REFCLK.</p>
AV5	Input	V4	<p>The SBI ADD bus payload indicator signal (AV5) locates the position of the floating payloads for each tributary within the SBI TDM bus structure. Timing differences between the port timing and the TDM bus timing are indicated by adjustments of this payload indicator relative to the fixed TDM bus structure. All movements indicated by this signal must be accompanied by appropriate adjustments in the APL signal.</p> <p>AV5 is sampled on the rising edge of REFCLK.</p>
DDATA[0] DDATA[1] DDATA[2] DDATA[3] DDATA[4] DDATA[5] DDATA[6] DDATA[7]	Tristate Output	AB19 Y17 AB16 AB15 W8 AA5 Y5 W5	<p>The SBI DROP bus data signals (DDATA[7:0]) contain time division multiplexed receive data from up to 84 independently timed links. Link data is transported as T1 or E1 tributaries within the SBI TDM bus structure. The OCTLIU-SH may be configured to insert data into up to 8 tributaries within the structure. Multiple LIU devices can drive the SBI DROP bus at uniquely assigned tributary column positions. DDATA[7:0] are tristated when the OCTLIU-SH is not outputting data on a particular tributary column.</p> <p>DDATA[7:0] are updated on the rising edge of REFCLK.</p>
DDP	Tristate Output	Y14	<p>The SBI DROP bus parity signal (DDP) carries the even or odd parity for the DROP bus signals. The parity calculation encompasses the DDATA[7:0], DPL and DV5 signals.</p> <p>Multiple LIU devices can drive this signal at uniquely assigned tributary column positions. DDP is tristated when the OCTLIU-SH is not outputting data on a particular tributary column. This parity signal is intended to detect accidental source clashes in the column assignment.</p> <p>DDP is updated on the rising edge of REFCLK.</p>

Pin Name	Type	Pin No.	Function
DPL	Tristate Output	Y8	<p>The SBI DROP bus payload signal (DPL) indicates valid data within the SBI TDM bus structure. This signal is asserted during all octets making up a tributary. This signal may be asserted during the V3 octet within a tributary to accommodate negative timing adjustments between the tributary rate and the fixed TDM bus structure. This signal may be deasserted during the octet following the V3 octet within a tributary to accommodate positive timing adjustments between the tributary rate and the fixed TDM bus structure.</p> <p>Multiple LIU devices can drive this signal at uniquely assigned tributary column positions. DPL is tristated when the OCTLIU-SH is not outputting data on a particular tributary column.</p> <p>DPL is updated on the rising edge of REFCLK.</p>
DV5	Tristate output	AB5	<p>The SBI DROP bus payload indicator signal (DV5) locates the position of the floating payloads for each tributary within the SBI TDM bus structure. Timing differences between the port timing and the TDM bus timing are indicated by adjustments of this payload indicator relative to the fixed TDM bus structure.</p> <p>Multiple LIU devices can drive this signal at uniquely assigned tributary column positions. DV5 is tristated when the OCTLIU-SH is not outputting data on a particular tributary column.</p> <p>DV5 is updated on the rising edge of REFCLK.</p>
DACTIVE	Output	Y4	<p>The SBI DROP bus active indicator signal (DACTIVE) is asserted whenever the OCTLIU-SH is driving the SBI DROP bus signals, DDATA[7:0], DDP, DPL and DV5.</p> <p>DACTIVE is updated on the rising edge of REFCLK.</p>
<b>Transmit Line Interface</b>			
TXTIP1[1] TXTIP1[2] TXTIP1[3] TXTIP1[4] TXTIP1[5] TXTIP1[6] TXTIP1[7] TXTIP1[8]  TXTIP2[1] TXTIP2[2] TXTIP2[3] TXTIP2[4] TXTIP2[5] TXTIP2[6] TXTIP2[7] TXTIP2[8]	Analogue Output	A12 K22 N22 AB12 AB9 L1 H1 A9  A11 L22 M22 AB11 AB10 K1 J1 A10	<p>Transmit Analogue Positive Pulse (TXTIP1[8:1] and TXTIP2[8:1]). When the transmit analogue line interface is enabled, the TXTIP1[x] and TXTIP2[x] analogue outputs drive the transmit line pulse signal through an external matching transformer. Both TXTIP1[x] and TXTIP2[x] are normally connected to the positive lead of the transformer primary. Two outputs are provided for better signal integrity and must be shorted together on the board.</p> <p>After a reset, TXTIP1[x] and TXTIP2[x] are high impedance. The HIGHZ bit of the octant's XLPG Line Driver Configuration register must be programmed to logic 0 to remove the high impedance state.</p>

Pin Name	Type	Pin No.	Function
TXRING1[1] TXRING1[2] TXRING1[3] TXRING1[4] TXRING1[5] TXRING1[6] TXRING1[7] TXRING1[8]  TXRING2[1] TXRING2[2] TXRING2[3] TXRING2[4] TXRING2[5] TXRING2[6] TXRING2[7] TXRING2[8]	Analogue Output	A13 J22 P22 AB13 AB8 M1 G1 A8  A14 H22 R22 AB14 AB7 N1 F1 A7	Transmit Analogue Negative Pulse (TXRING1[8:1] and TXRING2[8:1]). When the transmit analogue line interface is enabled, the TXRING1[x] and TXRING2[x] analogue outputs drive the transmit line pulse signal through an external matching transformer. Both TXRING1[x] and TXRING2[x] are normally connected to the negative lead of the transformer primary. Two outputs are provided for better signal integrity and must be shorted together on the board.  After a reset, TXRING1[x] and TXRING2[x] are high impedance. The HIGHZ bit of the octant's XLPG Line Driver Configuration register must be programmed to logic 0 to remove the high impedance state.
<b>Receive Line Interface</b>			
RXTIP[1] RXTIP[2] RXTIP[3] RXTIP[4] RXTIP[5] RXTIP[6] RXTIP[7] RXTIP[8]	Analogue Input	G21 J21 R21 R19 R4 P1 J3 G3	Receive Analogue Positive Pulse (RXTIP[8:1]). When the analogue receive line interface is enabled, RXTIP[x] samples the received line pulse signal from an external isolation transformer. RXTIP[x] is normally connected directly to the positive lead of the receive transformer secondary.
RXRING[1] RXRING[2] RXRING[3] RXRING[4] RXRING[5] RXRING[6] RXRING[7] RXRING[8]	Analogue Input	H19 J19 P19 U22 R3 P4 J4 H4	Receive Analogue Negative Pulse (RXRING[8:1]). When the analogue receive line interface is enabled, RXRING[x] samples the received line pulse signal from an external isolation transformer. RXRING[x] is normally connected directly to the negative lead of the receive transformer secondary.
<b>Timing Options Control</b>			
XCLK	Input	D9	Crystal Clock Input (XCLK). This signal provides a stable, global timing reference for the OCTLIU-SH internal circuitry via an internal clock synthesizer. XCLK is a nominally jitter free clock at 1.544 MHz in T1 mode and 2.048 MHz in E1 mode.  In T1 mode, a 2.048 MHz clock may be used as a reference. When used in this way, however, the jitter transfer specifications in AT&T TR62411 may not be met.
RSYNC	Output	D8	Recovered Clock Synchronization Signal (RSYNC). This output signal is the recovered, jitter attenuated, receiver line rate clock (1.544 or 2.048 MHz) of one of the eight T1 or E1 channels or, optionally, the recovered, jitter attenuated clock synchronously divided by 193 (T1 mode) or 256 (E1 mode) to create a 8 kHz timing reference signal. The default is to source RSYNC from octant #1.  When the OCTLIU-SH is in a loss of signal state, RSYNC is derived from the XCLK input or, optionally, is held high.

Pin Name	Type	Pin No.	Function
<b>Alarm Interface</b>			
LOS	Output	A5	Loss of Signal Alarm (LOS). This signal outputs the LOS status of the 8 LIU octants in a serial format which repeats every 8 XCLK cycles. The presence of the LOS status for LIU #1 on this output is indicated by the LOS_L1 output pulsing high. On the following XCLK cycle, the LOS status for LIU #2 is output, then LIU #3, and so on.  When the microprocessor interface is enabled, the status of the LOS alarm can also be determined by reading the LOSV bit in the CDRC Interrupt Status register.  LOS is updated on the falling edge of XCLK.
LOS_L1	Output	C7	Loss of Signal LIU #1 indicator (LOS_L1). This signal is pulsed high for one XCLK cycle every 8 XCLK cycles and indicates that the LOS status for LIU #1 is being output on LOS.  LOS_L1 is updated on the falling edge of XCLK.
<b>Misc. Control Signals</b>			
RSTB	Input	A6	Active Low Reset (RSTB). This signal provides an asynchronous OCTLIU-SH reset. RSTB is a Schmidt triggered input with an internal pull up resistor.
TXHIZ/LLB	Input	C1	Transmitter tri-state enable (TXHIZ) or Line Loopback enable (LLB). The mode of TXHIZ/LLB is controlled by register 005H, bit 3 (TXHIZ_LLB_EN). If this bit (TXHIZ_LLB_EN) is set to logic 0, setting TXHIZ/LLB=1 forces each of the transmitters into a high impedance state (i.e. TXTIP1[8:1], TXTIP2[8:1], TXRING1[8:1] and TXRING2[8:1]). Optionally, if TXHIZ_LLB_EN is set to logic 1, setting TXHIZ/LLB=1 forces each of the LIU's into line loopback. When line loopback is enabled the recovered data is internally directed to the digital inputs of the transmit jitter attenuator.
<b>Microprocessor Interface</b>			
A[0] A[1] A[2] A[3] A[4] A[5] A[6] A[7] A[8] A[9] A[10]	Input	E22 E21 E20 F19 D22 D21 D20 E19 C22 C21 C20	Address Bus (A[10:0]). This bus selects specific registers during OCTLIU-SH register accesses.  Signal A[10] selects between normal mode and test mode register access. A[10] has an internal pull down resistor.
ALE	Input	A22	Address Latch Enable (ALE). This signal is active high and latches the address bus contents, A[10:0], when low. When ALE is high, the internal address latches are transparent. ALE allows the OCTLIU-SH to interface to a multiplexed address/data bus. The ALE input has an internal pull up resistor.

Pin Name	Type	Pin No.	Function
WRB	Input	D18	Active Low Write Strobe (WRB). This signal is low during a OCTLIU-SH register write access. The D[7:0] bus contents are clocked into the addressed register on the rising WRB edge while CSB is low. <u>Alternatively, the D[7:0] bus contents are clocked into the addressed register on the rising CSB edge while WRB is low.</u>
RDB	Input	C19	Active Low Read Enable (RDB). This signal is low during OCTLIU-SH register read accesses. The OCTLIU-SH drives the D[7:0] bus with the contents of the addressed register while RDB and CSB are low.
CSB	Input	B20	Active Low Chip Select (CSB). CSB must be low to enable OCTLIU-SH register accesses. CSB must go high at least once after power up to clear internal test modes. If CSB is not used, it should be tied to an inverted version of RSTB, in which case, RDB and WRB determine register accesses.
INTB	Open-drain Output	D17	Active low Open-Drain Interrupt (INTB). This signal goes low when an unmasked interrupt event is detected on any of the internal interrupt sources. Note that INTB will remain low until all active, unmasked interrupt sources are acknowledged at their source at which time, INTB will tristate.
D[0] D[1] D[2] D[3] D[4] D[5] D[6] D[7]	I/O	B19 A20 A19 B18 A18 D15 B17 C15	<u>Bidirectional</u> <u>Bi-directional</u> Data Bus (D[7:0]). This bus provides OCTLIU-SH register read and write accesses.
PO	Output	D6	Programmable Output pin (PO). The programmable output pin is controlled by register 00EH, bit 7 (PO_EN). When PO_EN is set to logic 1, PO is set to logic 1. Otherwise when PO_EN is set to logic 0 PO is set to logic 0.
PI	Input	B4	Programmable Input pin (PI). The status programmable input pin is observed via register 00EH, bit 6 (PI_S). Reading the PI_S register latches the state of the PI input.
<b>Reserved Pins</b>			
RES_0[1]	Input	B7	This pin must be tied low for normal operation.
RES_0[2] RES_0[3] RES_0[4] RES_0[5]	Analogue I/O	V22 Y9 F3 B14	These pins must be connected to an analogue ground for normal operation.
RES_0[6]	Input	B6	This pin must be tied to ground for normal operation.



Pin Name	Type	Pin No.	Function
RES_0[7] RES_0[8] RES_0[9] RES_0[10] RES_0[11] RES_0[12] RES_0[13] RES_0[14] RES_0[15] RES_0[16] RES_0[17] RES_0[18] RES_0[19]	Input	B1 B3 C6 U3 U4 U19 V1 V2 V3 W2 W20 AA20 AA22	These pins must be tied low for normal operation.
RES_1[1]	Input	B16	This pin must be tied high for normal operation.
RES_NC[1] RES_NC[2] RES_NC[3] RES_NC[4] RES_NC[5] RES_NC[6] RES_NC[7] RES_NC[8] RES_NC[9] RES_NC[10] RES_NC[11] RES_NC[12] RES_NC[13] RES_NC[14] RES_NC[15] RES_NC[16]	Output	A3 A4 B5 C4 C5 W6 W7 Y16 AA4 AA15 AA18 AA19 AB2 AB6 AB17 AB18	These pins must be left unconnected for normal operation.
<b>JTAG Interface</b>			
TDO	Tristate Output	B2	Test Data Output (TDO). This signal carries test data out of the OCTLIU-SH via the IEEE 1149.1 test access port. TDO is updated on the falling edge of TCK. TDO is a tristate output that is tri-stated except when scanning of data is in progress.
TDI	Input	A1	Test Data Input (TDI). This signal carries test data into the OCTLIU-SH via the IEEE 1149.1 test access port. TDI is sampled on the rising edge of TCK. TDI has an internal pull up resistor.
TCK	Input	C2	Test Clock (TCK). This signal provides timing for test operations that can be carried out using the IEEE 1149.1 test access port.
TMS	Input	D3	Test Mode Select (TMS). This signal controls the test operations that can be carried out using the IEEE 1149.1 test access port. TMS is sampled on the rising edge of TCK. TMS has an internal pull up resistor.

Pin Name	Type	Pin No.	Function
TRSTB	Input	E4	Active low Test Reset (TRSTB). This signal provides an asynchronous OCTLIU-SH test access port reset via the IEEE 1149.1 test access port. TRSTB is a Schmidt triggered input with an internal pull up resistor. TRSTB must be asserted during the power up sequence.  Note that if not used, TRSTB should be connected to the RSTB input.
<b>Analogue Power and Ground Pins</b>			
TAVD1[1] TAVD1[2] TAVD1[3] TAVD1[4] TAVD1[5] TAVD1[6] TAVD1[7] TAVD1[8]	Analogue Power	D12 L19 M19 W12 W11 M4 L4 D11	Transmit Analogue Power (TAVD1[8:1]). TAVD1[8:1] provide power for the transmit LIU analogue circuitry. TAVD1[8:1] should be connected to analogue +3.3 V.
TAVD2[1] TAVD2[2] TAVD2[3] TAVD2[4] TAVD2[5] TAVD2[6] TAVD2[7] TAVD2[8]  TAVD3[1] TAVD3[2] TAVD3[3] TAVD3[4] TAVD3[5] TAVD3[6] TAVD3[7] TAVD3[8]	Analogue Power	C13 L21 N20 AA12 Y10 M2 K3 B11  B13 L20 N21 Y12 AA10 M3 K2 C11	Transmit Analogue Power (TAVD2[8:1], TAVD3[8:1]). TAVD2[8:1] and TAVD3[8:1] supply power for the transmit LIU current DACs. They should be connected to analogue +3.3 V.
CAVD	Analogue Power	C14	Clock Synthesis Unit Analogue Power (CAVD). CAVD supplies power for the transmit clock synthesis unit. CAVD should be connected to analogue +3.3 V.
TAVS1[1] TAVS1[2] TAVS1[3] TAVS1[4] TAVS1[5] TAVS1[6] TAVS1[7] TAVS1[8]	Analogue Ground	D13 K19 N19 W13 W10 N4 K4 D10	Transmit Analogue Ground (TAVS1[8:1]). TAVS1[8:1] provide ground for the transmit LIU analogue circuitry. TAVS1[8:1] should be connected to analogue GND.

Pin Name	Type	Pin No.	Function
TAVS2[1] TAVS2[2] TAVS2[3] TAVS2[4] TAVS2[5] TAVS2[6] TAVS2[7] TAVS2[8]  TAVS3[1] TAVS3[2] TAVS3[3] TAVS3[4] TAVS3[5] TAVS3[6] TAVS3[7] TAVS3[8]	Analogue Ground	A15 K20 P21 Y13 AA9 N3 J2 C10  C12 M21 M20 AA11 Y11 L2 L3 B12	Transmit Analogue Ground (TAVS2[8:1], TAVS3[8:1]). TAVS2[8:1] and TAVS3[8:1] supply ground for the transmit LIU current DACs. They should be connected to analogue GND.
CAVS	Analogue Ground	D14	Clock Synthesis Unit Analogue Ground (CAVS). CAVS supplies ground for the transmit clock synthesis unit. CAVS should be connected to analogue GND.
RAVD1[1] RAVD1[2] RAVD1[3] RAVD1[4] RAVD1[5] RAVD1[6] RAVD1[7] RAVD1[8]	Analogue Power	G22 K21 P20 T20 R2 N2 H2 H3	Receive Analogue Power (RAVD1[8:1]). RAVD1[8:1] supplies power for the receive LIU input equalizer. RAVD1[8:1] should be connected to analogue +3.3 V.
RAVD2[1] RAVD2[2] RAVD2[3] RAVD2[4] RAVD2[5] RAVD2[6] RAVD2[7] RAVD2[8]	Analogue Power	F21 H21 R20 U20 T2 P2 E1 E2	Receive Analogue Power (RAVD2[8:1]). RAVD2[8:1] supplies power for the receive LIU peak detect and slicer. RAVD2[8:1] should be connected to analogue +3.3 V.
RAVS1[1] RAVS1[2] RAVS1[3] RAVS1[4] RAVS1[5] RAVS1[6] RAVS1[7] RAVS1[8]	Analogue Ground	F22 J20 T22 U21 T1 P3 G2 D1	Receive Analogue Ground (RAVS1[8:1]). RAVS1[8:1] supplies ground for the receive LIU input equalizer. RAVS1[8:1] should be connected to analogue GND.
RAVS2[1] RAVS2[2] RAVS2[3] RAVS2[4] RAVS2[5] RAVS2[6] RAVS2[7] RAVS2[8]	Analogue Ground	G20 H20 T21 T19 T3 R1 F2 G4	Receive Analogue Ground (RAVS2[8:1]). RAVS2[8:1] supplies ground for the receive LIU peak detect and slicer. RAVS2[8:1] should be connected to analogue GND.

Pin Name	Type	Pin No.	Function
QAVD[1] QAVD[2] QAVD[3] QAVD[4]	Analogue Power	F20 AA13 T4 B10	Quiet Analogue Power (QAVD[4:1]). QAVD[4:1] supplies power for the core analogue circuitry. QAVD[4:1] should be connected to analogue +3.3 V.
QAVS[1] QAVS[2] QAVS[3] QAVS[4]	Analogue Ground	V21 AA8 F4 B15	Quiet Analogue Ground (QAVS[4:1]). QAVS[4:1] supplies ground for the core analogue circuitry. QAVS[4:1] should be connected to analogue GND.
<b>Digital Power and Ground Pins</b>			
VDD1V8[1] VDD1V8[2] VDD1V8[3] VDD1V8[4]	Power	A16 B9 W9 AA14	Core Power (VDD1V8[4:1]). The VDD1V8[4:1] pins should be connected to a well decoupled +1.8V DC power supply.
VDD3V3[1] VDD3V3[2] VDD3V3[3] VDD3V3[4] VDD3V3[5] VDD3V3[6] VDD3V3[7] VDD3V3[8] VDD3V3[9] VDD3V3[10] VDD3V3[11] VDD3V3[12] VDD3V3[13] VDD3V3[14] VDD3V3[15] VDD3V3[16] VDD3V3[17] VDD3V3[18] VDD3V3[19]	Power	A2 B8 B21 B22 C17 C18 D2 D7 G19 W3 W16 W17 W19 Y7 Y15 Y20 AA3 AB1 AB4	I/O Power (VDD3V3[19:1]). The VDD3V3[19:1] pins should be connected to a well decoupled +3.3V DC power supply.

Pin Name	Type	Pin No.	Function
VSS[1] VSS[2] VSS[3] VSS[4] VSS[5] VSS[6] VSS[7] VSS[8] VSS[9] VSS[10] VSS[11] VSS[12] VSS[13] VSS[14] VSS[15] VSS[16] VSS[17] VSS[18] VSS[19] VSS[20] VSS[21] VSS[22] VSS[23] VSS[24] VSS[25]	Ground	A17 A21 C3 C8 C9 C16 D5 D16 D19 E3 U1 V20 W14 Y3 Y6 Y18 AA2 AA6 AA7 AA16 AA17 AB3 AB20 AB21 AB22	Ground (VSS [25:1]). The VSS[25:1] pins should be connected to Ground.
NC1 NC2	Open	D4 W4	These pins must be left unconnected.

**Notes on Pin Descriptions:**

- All OCTLIU-SH inputs and bi-directionals present minimum capacitive loading.
- All OCTLIU-SH inputs and bi-directionals, when configured as inputs, tolerate TTL logic levels.
- All OCTLIU-SH outputs and bi-directionals have at least 8 mA drive capability, except the LOS, LOS\_L1, TDO, which have at least 6 mA drive capability. The transmit analogue outputs (TXTIP and TXRING) have built-in short circuit current limiting.
- Inputs RSTB, ALE, TMS, TDI and TRSTB have internal pull-up resistors.
- Inputs A[10], RES\_0[1], and RES\_0[6] have internal pull-down resistors.
- All unused inputs should be connected to GROUND.
- The 3.3 Volt power pins (i.e., TAVD1, TAVD2, TAVD3, CAVD, RAVD1, RAVD2, QAVD, and VDD3V3) will be collectively referred to as VDDall33 in this document.
- Power to VDDall33 should be applied *before* power to the VDD1V8 pins is applied. Similarly, power to the VDD1V8 pins should be removed *before* power to VDDall33 is removed.
- The VDDall33 voltage level should not be allowed to drop below the VDD1V8 voltage level except when VDD1V8 is not powered.
- All analogue and digital ground pins (i.e. TAVS1, TAVS2, TAVS3, CAVS, QAVS, RAVS1, RAVS2 and VSS) must be connected to a common low impedance ground plane.

## 9 Functional Description

### 9.1 Octants

The OCTLIU-SH's eight E1/T1 line interface units operate independently and can be configured to operate uniquely. The octants do share a common XCLK clock input and internal clock synthesizer; hence only a single CSU Configuration register is present. Additionally, all octants share a common E1/T1B mode register bit to select between T1 and E1 operation.

### 9.2 Receive Interface

The analogue receive interface is configurable to operate in both E1 and T1 short-haul applications. Short-haul T1 is defined as transmission over less than 655 ft of cable. Short-haul E1 is defined as transmission on any cable that attenuates the signal by less than 6 dB, while short-haul T1 cable attenuation is less than 3dB.


For short-haul, the slicing threshold is set to a fraction of the input signal's peak amplitude, and adapts to changes in this amplitude. The slicing threshold is programmable, but is typically 50% for DSX-1 and E1 applications. Abnormally low input signals are detected when the input level is below a programmable threshold, which is typically 140 mV for E1 and 105 mV for T1.

### 9.3 Clock and Data Recovery (CDRC)

The Clock and Data Recovery function is provided by the Clock and Data Recovery (CDRC) block. The CDRC provides clock and PCM data recovery, B8ZS and HDB3 decoding, line code violation detection, and loss of signal detection. It recovers the clock from the incoming RZ data pulses using a digital phase-locked-loop and reconstructs the NRZ data. Loss of signal is indicated after a programmable threshold of consecutive bit periods of the absence of pulses on both the positive and negative line pulse inputs and is cleared after the occurrence of a single line pulse. An alternate loss of signal indication is provided which is cleared upon meeting **ana** 1-in-8 pulse density criteria for T1 and a 1-in-4 pulse density criteria for E1. If enabled, a microprocessor interrupt is generated when a loss of signal is detected and when the signal returns. A line code violation is defined as a bipolar violation (BPV) for AMI-coded signals, is defined as a BPV that is not part of a zero substitution code for B8ZS-coded signals, and is defined as a bipolar violation of the same polarity as the last bipolar violation for HDB3-coded signals.


In T1 mode, the input jitter tolerance of the OCTLIU-SH complies with the Bellcore Document TA-TSY-000170 and with the AT&T specification TR62411, as shown in Figure 6. The tolerance is measured with a QRSS sequence ( $2^{20}-1$  with 14 zero restriction).

**Figure 6 T1 Jitter Tolerance**

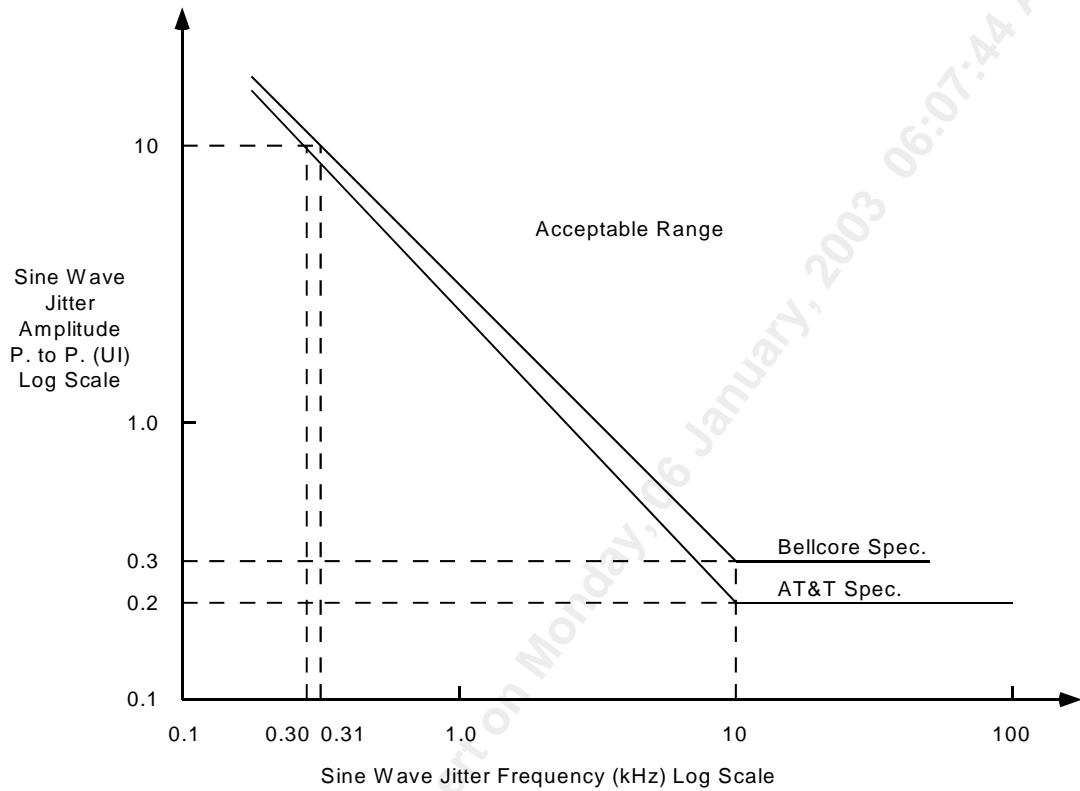

For E1 applications, the input jitter tolerance complies with the ITU-T Recommendation G.823 “The Control of Jitter and Wander Within Digital Networks Which are Based on the 2048 kbit/s Hierarchy.” Figure 7 illustrates this specification and the performance of the phase-locked loop.

**Figure 7 Compliance with ITU-T Specification G.823 for E1 Input Jitter**

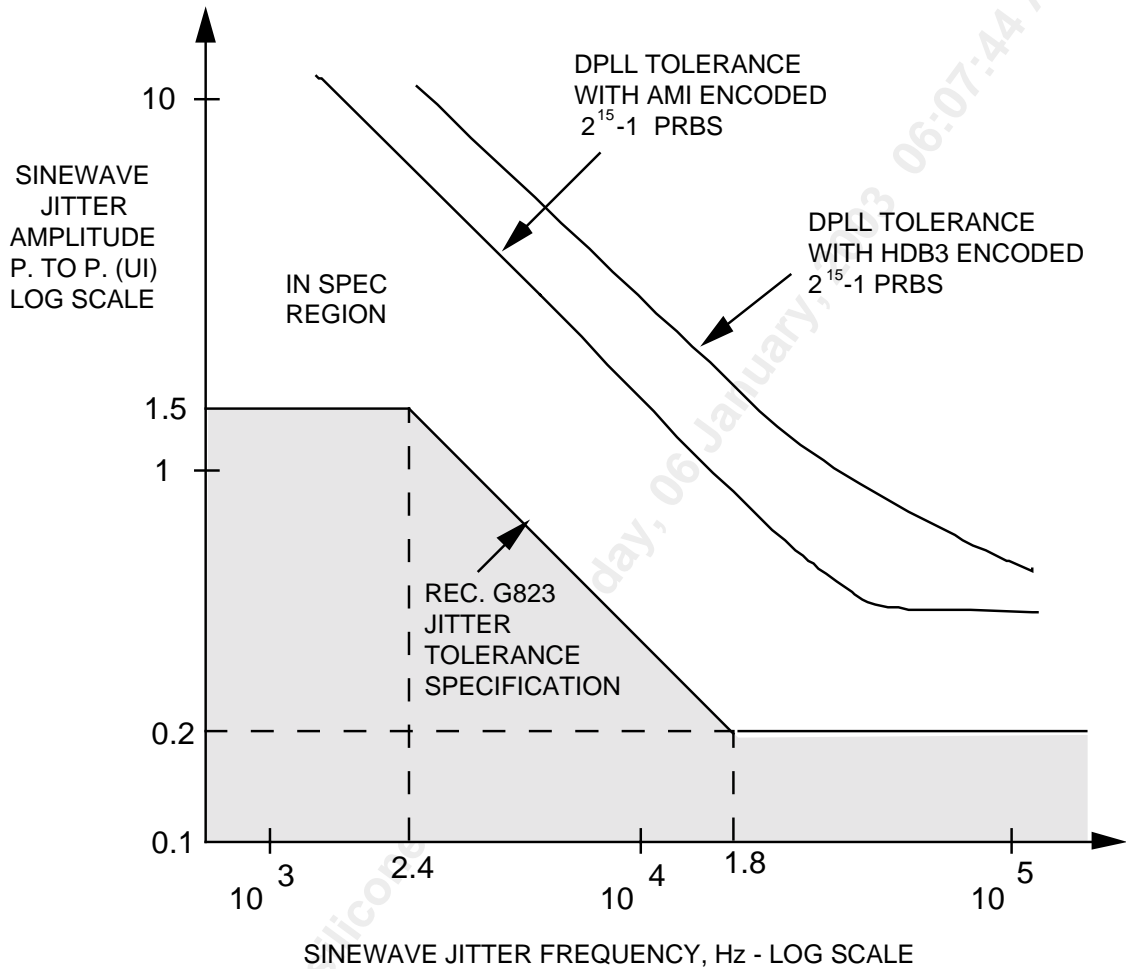

## 9.4 Receive Jitter Attenuator (RJAT)

The Receive Jitter Attenuator (RJAT) digital PLL attenuates the jitter present on the RXTIP/RXRING inputs. The attenuation is only performed when the RJATBYP register bit is a logic 0.

The jitter characteristics of the Receive Jitter Attenuator (RJAT) are the same as the Transmit Jitter Attenuator (TJAT).



## 9.5 T1 Inband Loopback Code Detector (IBCD)

The T1 Inband Loopback Code Detection function is provided by the IBCD block. This block detects the presence of either of two programmable INBAND LOOPBACK ACTIVATE and DEACTIVATE code sequences in the receive data stream. Each INBAND LOOPBACK code sequence is defined as the repetition of the programmed code in the PCM stream for at least 5.1 seconds. The detection algorithm tolerates more than the minimum number of discrepancy bits in order to detect framed PCM data in the presence of a  $10^{-2}$  bit error rate. The code sequence detection and timing is compatible with the specifications defined in T1.403-1993, TA-TSY-000312, and TR-TSY-000303. LOOPBACK ACTIVATE and DEACTIVATE code indication is provided through internal register bits. An interrupt is generated to indicate when either code status has changed.

## 9.6 T1 Pulse Density Violation Detector (PDVD)

The Pulse Density Violation Detection function is provided by the PDVD block. The block detects pulse density violations of the requirement that there be N ones in each and every time window of  $8(N+1)$  data bits (where N can equal 1 through 23). The PDVD also detects periods of 16 consecutive zeros in the incoming data. Pulse density violation detection is provided through an internal register bit. An interrupt is generated to signal a 16 consecutive zero event, and/or a change of state on the pulse density violation indication.

## 9.7 Performance Monitor Counters (PMON)

The Performance Monitor block accumulates line code violation events with a saturating counter over consecutive intervals as defined by the period between writes to trigger registers (typically 1 second). When the trigger is applied, the PMON transfers the counter value into holding registers and resets the counter to begin accumulating events for the interval. The counter is reset in such a manner that error events occurring during the reset are not missed.

Triggering a counter transfer within an octant is performed by writing to any counter register location within the octant or by writing to the "Line Interface Interrupt Source #1 / PMON Update" register.

## 9.8 Pseudo Random Binary Sequence Generation and Detection (PRBS)

The Pseudo Random Binary Sequence Generator/Detector (PRBS) block is a software selectable PRBS generator and checker for  $2^{11}-1$ ,  $2^{15}-1$  or  $2^{20}-1$  PRBS polynomials for use in the T1 and E1 links. PRBS patterns may be generated and detected in either the transmit or receive directions.

The PRBS block can perform an auto synchronization to the expected PRBS pattern and accumulates the total number of bit errors in two 24-bit counters. The error count accumulates over the interval defined by successive writes to the Line Interface Interrupt Source #1 / PMON Update register. When an accumulation is forced, the holding register is updated, and the counter reset to begin accumulating for the next interval. The counter is reset in such a way that no events are missed. The data is then available in the Error Count registers until the next accumulation.

## 9.9 T1 Inband Loopback Code Generator (XIBC)

The T1 Inband Loopback Code Generator (XIBC) block generates a stream of inband loopback codes (IBC) to be inserted into a T1 data stream. The IBC stream consists of continuous repetitions of a specific code. The contents of the code and its length are programmable from 3 to 8 bits.

## 9.10 Pulse Density Enforcer (XPDE)

The Pulse Density Enforcer function is provided by the XPDE block. Pulse density enforcement is enabled by a register bit within the XPDE.

This block monitors the digital output of the transmitter and detects when the stream is about to violate the ANSI T1.403 12.5% pulse density rule over a moving 192-bit window. If a density violation is detected, the block can be enabled to insert a logic 1 into the digital stream to ensure the resultant output no longer violates the pulse density requirement. When the XPDE is disabled from inserting logic 1s, the digital stream from the transmitter is passed through unaltered.

## 9.11 Transmit Jitter Attenuator (TJAT)

The Transmit Jitter Attenuation function is provided by a digital phase lock loop and 80-bit deep FIFO. The TJAT receives jittery, dual-rail data in NRZ format on two separate inputs, which allows bipolar violations to pass through the block uncorrected. The incoming data streams are stored in a FIFO timed to the transmit clock. The respective input data emerges from the FIFO timed to the jitter attenuated clock.

The jitter attenuator generates the jitter-free 1.544 MHz or 2.048 MHz Transmit clock output by adjusting the Transmit clock's phase in 1/96 UI increments to minimize the phase difference between the generated Transmit clock and input data clock to TJAT. Jitter fluctuations in the phase of the input data clock are attenuated by the phase-locked loop within TJAT so that the frequency of Transmit clock is equal to the average frequency of the input data clock. For T1 applications, to best fit the jitter attenuation transfer function recommended by TR 62411, phase fluctuations with a jitter frequency above 5.7 Hz are attenuated by 6 dB per octave of jitter frequency. Wandering phase fluctuations with frequencies below 5.7 Hz are tracked by the generated Transmit clock. In E1 applications, the corner frequency is 7.6 Hz. To provide a smooth flow of data out of TJAT, the Transmit clock is used to read data out of the FIFO.

If the FIFO read pointer (timed to the Transmit clock) comes within one bit of the write pointer (timed to the input data clock), TJAT will track the jitter of the input clock. This permits the phase jitter to pass through unattenuated, inhibiting the loss of data.

### Jitter Characteristics


The TJAT Block provides excellent jitter tolerance and jitter attenuation while generating minimal residual jitter. It can accommodate up to 61 Uipp of input jitter at jitter frequencies above 5.7 Hz (7.6 Hz for E1). For jitter frequencies below 5.7 Hz (7.6 Hz for E1), more correctly called wander, the tolerance increases 20 dB per decade. In most applications the TJAT Block will limit jitter tolerance at lower jitter frequencies only. For high frequency jitter, above 10 kHz for example, other factors such as clock and data recovery circuitry may limit jitter tolerance and must be considered. For low frequency wander, below 10 Hz for example, other factors such as slip buffer hysteresis may limit wander tolerance and must be considered. The TJAT block meets the stringent low frequency jitter tolerance requirements of AT&T TR 62411 and thus allows compliance with this standard and the other less stringent jitter tolerance standards cited in the references.

TJAT exhibits negligible jitter gain for jitter frequencies below 5.7 Hz (7.6 Hz for E1), and attenuates jitter at frequencies above 5.7 Hz (7.6 Hz for E1) by 20 dB per decade. In most applications, the TJAT block will determine jitter attenuation for higher jitter frequencies only. Wander, below 10 Hz for example, will essentially be passed unattenuated through TJAT. Jitter, above 10 Hz for example, will be attenuated as specified, however, outgoing jitter may be dominated by the generated residual jitter in cases where incoming jitter is insignificant. This generated residual jitter is directly related to the use of a 1/96 UI phase adjustment quantum. TJAT meets the jitter attenuation requirements of AT&T TR 62411. The block allows the implied jitter attenuation requirements for a TE or NT1 given in ANSI Standard T1.408, and the implied jitter attenuation requirements for a type II customer interface given in ANSI T1.403 to be met.

### Jitter Tolerance


Jitter tolerance is the maximum input phase jitter at a given jitter frequency that a device can accept without exceeding its linear operating range, or corrupting data. For TJAT, the input jitter tolerance is 61 Unit Intervals peak-to-peak (Uipp) with a worst case frequency offset of 354 Hz. It is 80 Uipp with no frequency offset. The frequency offset is the difference between the frequency of XCLK and that of the input data clock.

**Figure 8 TJAT Jitter Tolerance**

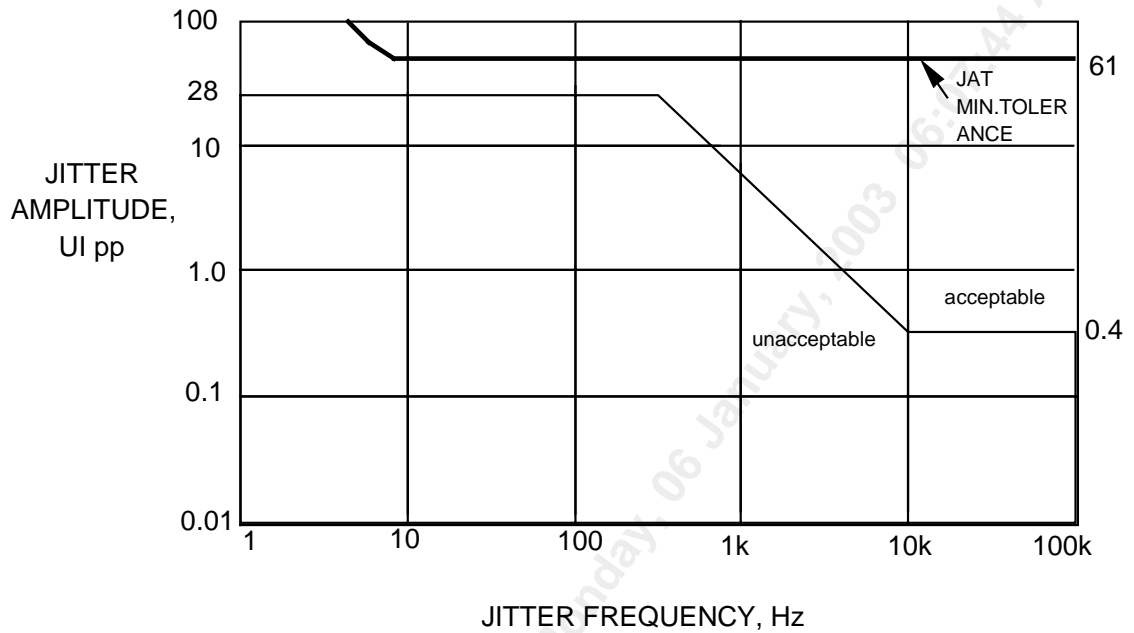

The accuracy of the XCLK frequency and that of the TJAT PLL reference input clock used to generate the jitter-free Transmit clock output have an effect on the minimum jitter tolerance. Given that the TJAT PLL reference clock accuracy can be  $\pm 200$  Hz and that the XCLK input accuracy can be  $\pm 50$  ppm, the minimum jitter tolerance for various differences between the frequency of PLL reference clock and XCLK are shown in Figure 9.


Figure 9 TJAT Minimum Jitter Tolerance vs. XCLK Accuracy

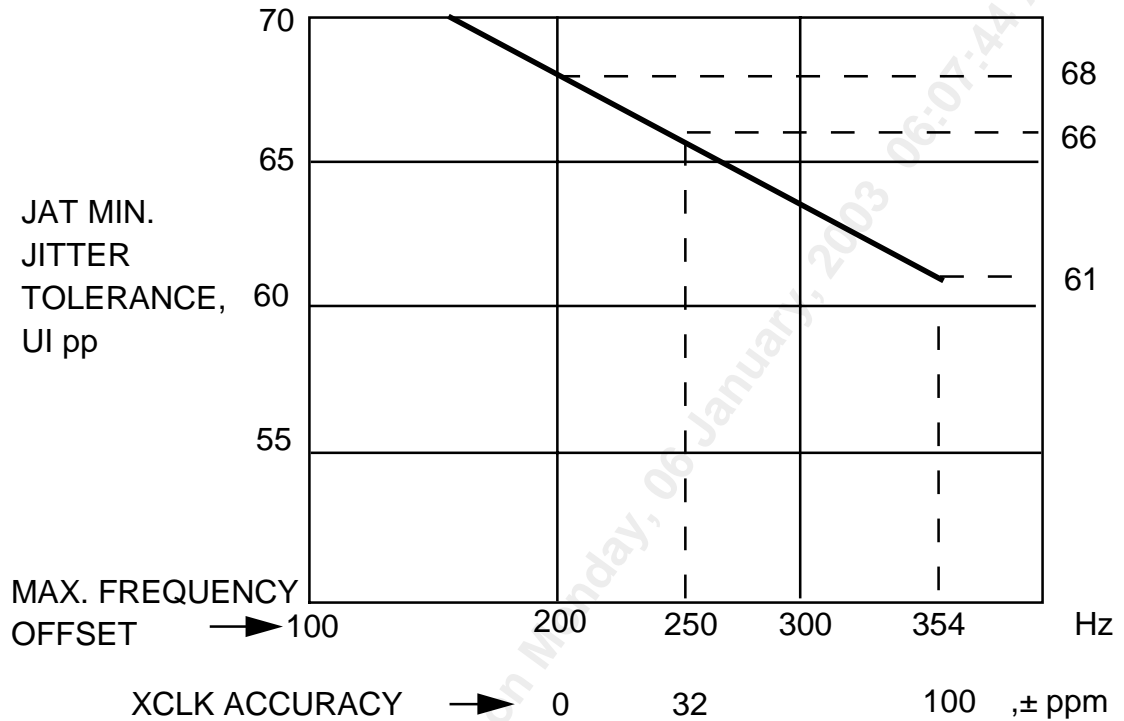

**Jitter Transfer**

For T1 applications, the output jitter for jitter frequencies from 0 to 1.075.7 Hz (1.427.6 Hz for E1) is no more than 0.1 dB greater than the input jitter, excluding residual jitter. Jitter frequencies above 1.075.7 Hz (1.427.6 Hz for E1) are attenuated at a level of 6 dB per octave, as shown in Figure 10. The figure is valid for the case where the N1 = F2FH in the TJAT Jitter Attenuator Divider N1 Control register and N2 = F2FH in the TJAT Divider N2 Control register.

Figure 10 TJAT Jitter Transfer

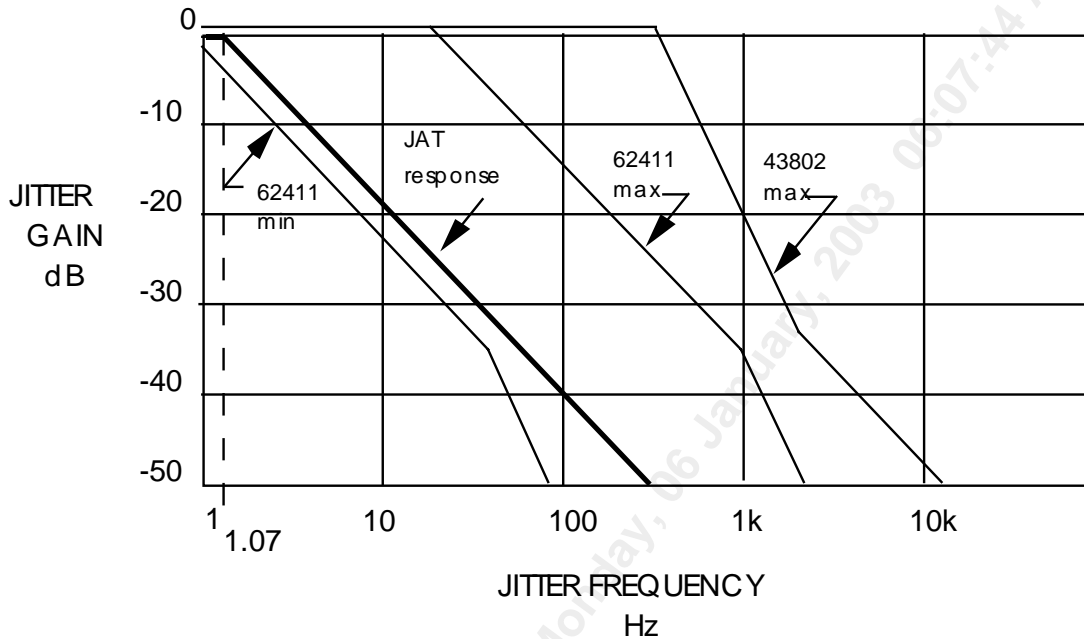

### T1

In the non-attenuating mode, when the FIFO is within one UI of overflowing or underflowing, the tracking range is 1.48 MHz to 1.608 MHz.

The guaranteed linear operating range for the jittered input clock is 1.544 MHz  $\pm$  200 Hz with worst case jitter (61 Uipp), and maximum system clock frequency offset ( $\pm$  50 ppm). The nominal range is 1.544 MHz  $\pm$  963 Hz with no jitter or system clock frequency offset.

### E1

In the non-attenuating mode, when the FIFO is within one UI of overflowing or underflowing, the tracking range is 2.13 MHz to 1.97 MHz.

The guaranteed linear operating range for the jittered input clock is 2.048 MHz  $\pm$  300 Hz with worst case jitter (61 Uipp), and maximum system clock frequency offset ( $\pm$  50 ppm). The nominal range is 2.048 MHz  $\pm$  1277 Hz with no jitter or system clock frequency offset.

### Jitter Generation

In the absence of input jitter, the output jitter shall be less than 0.025 Uipp. This complies with the AT&T TR 62411 requirement of less than 0.025 Uipp of jitter generation.

## 9.12 Line Transmitter

The line transmitter generates Alternate Mark Inversion (AMI) transmit pulses suitable for use in the DSX-1 (short haul T1), short haul E1 environments. The voltage pulses are produced by applying a current to a known termination (termination resistor plus line impedance). The use of current (instead of a voltage driver) simplifies transmit Input Return Loss (IRL), transmit short circuit protection (none needed) and transmit tri-stating.

The output pulse shape is synthesized digitally with current digital-to-analogue (DAC) converters, which produce 24 samples per symbol. The current DAC's produce differential bipolar outputs that directly drive the TXTIP1[x], TXTIP2[x], TXRING1[x] and TXRING2[x] pins. The current output is applied to a terminating resistor and line-coupling transformer in a differential manner, which when viewed from the line side of the transformer produce the output pulses at the required levels and ensures a small positive to negative pulse imbalance.

The pulse shape is user programmable. For T1 short haul, the cable length between the OCTLIU-SH and the cross-connect (where the pulse template specifications are given) greatly affects the resulting pulse shapes. Hence, the data applied to the converter must account for different cable lengths. For CEPT E1 applications the pulse template is specified at the transmitter, thus only one setting is required.

Refer to the Operation section for details on creating the synthesized pulse shape.

## 9.13 Timing Options (TOPS)

The Timing Options block provides a means of selecting the source of the internal input clock to the TJAT block, and the reference clock for the TJAT digital PLL.

## 9.14 External Analogue Interface Circuits

Figure 11 External Analogue Interface Circuits

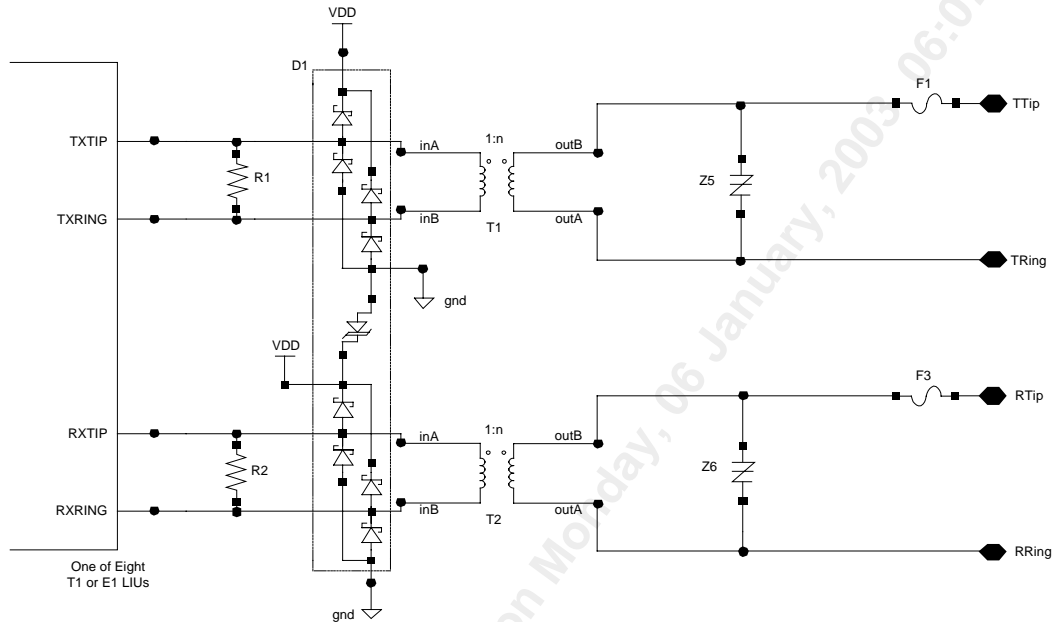


Figure 11 gives the recommended external protection circuitry for designs required to meet the intra-building line protection standards including Telcordia IntraBuilding Protection Requirements under GR-1089-CORE.

See Table 1 for the descriptions of components for Figure 11.

Table 1 External Component Descriptions

Component	Description	Part #	Source
R1	36.0Ω ±1%, 0.25W Resistor	ERJ-14NF36R0U	Panasonic
R2	27.0Ω ±1%, 0.25W Resistor	ERJ-14NF27R0U	Panasonic
D1	Surge Protector Diode Array	SRDA3.3-4	Semtech
T1 & T2	1:2 CT Transformers	T9023	Pulse
Z5 – Z6	Bi-directional Transient Surge Suppressors	P0720SC	Teccor
F1 & F3	Telecom/Time Lag Fuses	F1250T	Teccor

When operating in E1 mode with 75Ω cable, a 1:1.58 turns ratio transformer is specified in the above table. It is in fact also possible to use a 1:2 turns ratio transformer, in which case the value of R1 must be changed to 22.0Ω ±1% and the value of R2 must be changed to 18.0Ω ±1%.



## 9.15 Scaleable Bandwidth Interconnect (SBI) Interface

The Scaleable Bandwidth Interconnect is a synchronous, time-division multiplexed bus designed to transfer, in a pin-efficient manner, data belonging to a number of independently timed links of varying bandwidth. The bus is timed to a reference 19.44MHz clock and a 2 kHz (or fraction thereof) frame pulse. All sources and sinks of data on the bus are timed to the reference clock and frame pulse.

Timing is communicated across the Scaleable Bandwidth Interconnect by floating data structures. Payload indicator signals in the SBI control the position of the floating data structure and therefore the timing. When sources are running faster than the SBI the floating payload structure is advanced by an octet by passing an extra octet in the V3 octet locations (H3 octet for DS3 mappings which are not used by the OCTLIU-SH). When the source is slower than the SBI the floating payload is retarded by leaving the octet after the V3 or H3 octet unused. Both these rate adjustments are indicated by the SBI control signals.

The SBI multiplexing structure is modeled on the SONET/SDH standards. The SONET/SDH virtual tributary structure is used to carry T1/J1 and E1 links. Unchannelized DS3 payloads (not used by OCTLIU-SH) follow a byte synchronous structure modeled on the SONET/SDH format.

The SBI structure uses a locked SONET/SDH structure fixing the position of the TUG-3/TU-3 relative to the STS-3/STM-1 transport frame. The SBI is also of fixed frequency and alignment as determined by the reference clock (REFCLK) and frame indicator signal (C1FP). Frequency deviations are compensated by adjusting the location of the T1/J1/E1/DS3 channels using floating tributaries as determined by the V5 indicator and payload signals (DV5, AV5, DPL and APL). Note that the OCTLIU-SH always operates as a clock slave on the SBI ADD bus and as a clock master on the SBI DROP bus, i.e. it does not support the AJUST\_REQ and DJUST\_REQ timing adjustment request signals defined in the SBI bus specification.

The multiplexed links are separated into three Synchronous Payload Envelopes (SPE). Each envelope may be configured independently to carry up to 28 T1/J1s, 21 E1s or a DS3. The OCTLIU-SH may be configured to use any eight T1/J1 tributaries or any eight E1 tributaries from any of the three SPE's. The eight tributaries need not all be selected from the same SPE. A single OCTLIU-SH device cannot, however, use T1/J1 and E1 tributaries simultaneously.

If the AC1FP signal is not generated the downstream transmit path blocks are disabled, since no clock will be generated.

## 9.16 SBI Extractor and PISO

The SBI Extract block receives data from the SBI ADD BUS and converts it to serial bit streams for transmission. The SBI Extract block may be configured to enable or disable extraction of individual tributaries within the SBI ADD bus. It may also be configured to generate an all-1s output to the transmit LIU when an alarm indication is signalled for a particular tributary via the SBI bus.

---

## 9.17 SBI Inserter and SIPO

The SBI Insert block receives serial data from the LIU octants and inserts it on the SBI DROP BUS. The SBI Insert block may be configured to enable or disable transmission of individual tributaries on to the SBI DROP bus.

## 9.18 JTAG Test Access Port

The JTAG Test Access Port block provides JTAG support for boundary scan. The standard JTAG EXTEST, SAMPLE, BYPASS, IDCODE and STCTEST instructions are supported.

## 9.19 Microprocessor Interface

The Microprocessor Interface Block provides normal and test mode registers, the interrupt logic, and the logic required to connect to the Microprocessor Interface. The normal mode registers are required for normal operation, and test mode registers are used to enhance the testability of the OCTLIU-SH.

## 10 Normal Mode Register Description

Normal mode registers are used to configure and monitor the operation of the OCTLIU-SH. Normal mode registers (as opposed to test mode registers) are selected when A[10] is low.

The Register Memory Map in Table 2 below shows where the normal mode registers are accessed. The OCTLIU-SH contains 1 set of master configuration, SBI, and CSU registers and 8 sets of T1/E1 LIU registers. Where only 1 set is present, the registers apply to the entire device. Where 8 sets are present, each set of registers apply to a single octant of the OCTLIU-SH. By convention, where 8 sets of registers are present, address space 000H – 07FH applies to octant #1, 080H – 0FFH applies to octant #2, etc, up to 380H – 3FFH for octant #8.

On reset the OCTLIU-SH defaults to T1 mode. For proper operation some register configuration is expected. By default interrupts will not be enabled, and automatic alarm generation is disabled.

### Notes on Normal Mode Register Bits:

1. Writing values into unused register bits has no effect. Reading back unused bits can produce either a logic 1 or a logic 0; hence, unused register bits should be masked off by software when read.
2. All configuration bits that can be written into can also be read back. This allows the processor controlling the OCTLIU-SH to determine the programming state of the chip.
3. Writeable normal mode register bits are cleared to zero upon reset unless otherwise noted.
4. Writing into read-only normal mode register bit locations does not affect OCTLIU-SH operation unless otherwise noted.
5. Certain register bits are reserved. These bits are associated with functions that are unused in this application. To ensure that the OCTLIU-SH operates as intended, reserved register bits must only be written with their default values unless otherwise stated. Similarly, writing to reserved registers should be avoided unless otherwise stated.

### 10.1 Normal Mode Register Memory Map

**Table 2 Normal Mode Register Memory Map**

Addr	Register
000H	Reset / Revision ID / Device ID
080H, 100H, 180H, 200H, 280H, 300H, 380H	Reserved
001H	Global Configuration / Clock Monitor
081H, 101H, 181H, 201H, 281H, 301H, 381H	Reserved
002H	Master Interrupt Source #1
082H, 102H, 182H, 202H, 282H, 302H, 382H	Reserved
003H	Master Interrupt Source #2
083H, 103H, 183H, 203H, 283H, 303H, 383H	Reserved

Addr	Register
004H	Master Test Control #1
084H, 104H, 184H, 204H, 284H, 304H, 384H	Reserved
005H	Master Test Control #2
085H, 105H, 185H, 205H, 285H, 305H, 385H	Reserved
006H	CSU Configuration
086H, 106H, 186H, 206H, 286H, 306H, 386H	Reserved
007H	CSU Reserved
087H, 107H, 187H, 207H, 287H, 307H, 387H	Reserved
008H, 088H, 108H, 188H, 208H, 288H, 308H, 388H	Receive Line Interface Configuration #1
009H, 089H, 109H, 189H, 209H, 289H, 309H, 389H	Receive Line Interface Configuration #2
00AH, 08AH, 10AH, 18AH, 20AH, 28AH, 30AH, 38AH	Transmit Line Interface Configuration
00BH, 08BH, 10BH, 18BH, 20BH, 28BH, 30BH, 38BH	Transmit Line Interface Timing Options / Clock Monitor / Pulse Template Selection
00CH, 08CH, 10CH, 18CH, 20CH, 28CH, 30CH, 38CH	Line Interface Interrupt Source #1 / PMON Update
00DH, 08DH, 10DH, 18DH, 20DH, 28DH, 30DH, 38DH	Line Interface Interrupt Source #2
00EH, 08EH, 10EH, 18EH, 20EH, 28EH, 30EH, 38EH	Line Interface Diagnostics
00FH, 08FH, 10FH, 18FH, 20FH, 28FH, 30FH, 38FH	Line Interface PRBS Position
010H – 03FH	Reserved
090H – 0BFH	Reserved
110H – 13FH	Reserved
190H – 1BFH	Reserved
210H – 23FH	Reserved
290H – 2BFH	Reserved
310H	INSBI Control
311H	INSBI FIFO Underrun Interrupt Status
312H	INSBI FIFO Overrun Interrupt Status
313H	INSBI Page A Octant to Tributary Mapping #1
314H	INSBI Page A Octant to Tributary Mapping #2
315H	INSBI Page A Octant to Tributary Mapping #3
316H	INSBI Page A Octant to Tributary Mapping #4
317H	INSBI Page A Octant to Tributary Mapping #5
318H	INSBI Page A Octant to Tributary Mapping #6

Addr	Register
319H	INSBI Page A Octant to Tributary Mapping #7
31AH	INSBI Page A Octant to Tributary Mapping #8
31BH	INSBI Page B Octant to Tributary Mapping #1
31CH	INSBI Page B Octant to Tributary Mapping #2
31DH	INSBI Page B Octant to Tributary Mapping #3
31EH	INSBI Page B Octant to Tributary Mapping #4
31FH	INSBI Page B Octant to Tributary Mapping #5
320H	INSBI Page B Octant to Tributary Mapping #6
321H	INSBI Page B Octant to Tributary Mapping #7
322H	INSBI Page B Octant to Tributary Mapping #8
323H	INSBI Link Enable
324H	INSBI Link Enable Busy
325H	INSBI Tributary Control #1
326H	INSBI Tributary Control #2
327H	INSBI Tributary Control #3
328H	INSBI Tributary Control #4
329H	INSBI Tributary Control #5
32AH	INSBI Tributary Control #6
32BH	INSBI Tributary Control #7
32CH	INSBI Tributary Control #8
32DH	INSBI Minimum Depth
32EH	INSBI FIFO Thresholds
32FH – 330H	INSBI Reserved
331H	INSBI Depth Check Interrupt Status
332H	INSBI Master Interrupt Status
333H – 33FH	INSBI Reserved
390H	EXSBI Control
391H	EXSBI FIFO Underrun Interrupt Status
392H	EXSBI FIFO Overrun Interrupt Status
393H	EXSBI Parity Error Interrupt Reason
394H	EXSBI Depth Check Interrupt Status
395H	EXSBI Master Interrupt Status
396H	EXSBI Minimum Depth
397H	EXSBI FIFO Thresholds
398H	EXSBI Link Enable
399H	EXSBI Link Enable Busy
39AH – 39FH	EXSBI Reserved
3A0H	EXSBI Tributary Control #1
3A1H	EXSBI Tributary Control #2
3A2H	EXSBI Tributary Control #3

Addr	Register
3A3H	EXSBI Tributary Control #4
3A4H	EXSBI Tributary Control #5
3A5H	EXSBI Tributary Control #6
3A6H	EXSBI Tributary Control #7
3A7H	EXSBI Tributary Control #8
3A8H	EXSBI Page A Octant to Tributary Mapping #1
3A9H	EXSBI Page A Octant to Tributary Mapping #2
3AAH	EXSBI Page A Octant to Tributary Mapping #3
3ABH	EXSBI Page A Octant to Tributary Mapping #4
3ACH	EXSBI Page A Octant to Tributary Mapping #5
3ADH	EXSBI Page A Octant to Tributary Mapping #6
3AEH	EXSBI Page A Octant to Tributary Mapping #7
3AFH	EXSBI Page A Octant to Tributary Mapping #8
3B0H	EXSBI Page B Octant to Tributary Mapping #1
3B1H	EXSBI Page B Octant to Tributary Mapping #2
3B2H	EXSBI Page B Octant to Tributary Mapping #3
3B3H	EXSBI Page B Octant to Tributary Mapping #4
3B4H	EXSBI Page B Octant to Tributary Mapping #5
3B5H	EXSBI Page B Octant to Tributary Mapping #6
3B6H	EXSBI Page B Octant to Tributary Mapping #7
3B7H	EXSBI Page B Octant to Tributary Mapping #8
3B8H – 3BFH	EXSBI Reserved
040H, 0C0H, 140H, 1C0H, 240H, 2C0H, 340H, 3C0H	Reserved
041H, 0C1H, 141H, 1C1H, 241H, 2C1H, 341H, 3C1H	Reserved
042H, 0C2H, 142H, 1C2H, 242H, 2C2H, 342H, 3C2H	T1 PDVD Reserved
043H, 0C3H, 143H, 1C3H, 243H, 2C3H, 343H, 3C3H	T1 PDVD Interrupt Enable/Status
044H, 0C4H, 144H, 1C4H, 244H, 2C4H, 344H, 3C4H	T1 XPDE Reserved
045H, 0C5H, 145H, 1C5H, 245H, 2C5H, 345H, 3C5H	T1 XPDE Interrupt Enable/Status
046H, 0C6H, 146H, 1C6H, 246H, 2C6H, 346H, 3C6H	T1 XIBC Control
047H, 0C7H, 147H, 1C7H, 247H, 2C7H, 347H, 3C7H	T1 XIBC Loopback Code
048H, 0C8H, 148H, 1C8H, 248H, 2C8H, 348H, 3C8H	RJAT Interrupt Status
049H, 0C9H, 149H, 1C9H, 249H, 2C9H, 349H, 3C9H	RJAT Reference Clock Divisor (N1) Control

Addr	Register
04AH, 0CAH, 14AH, 1CAH, 24AH, 2CAH, 34AH, 3CAH	RJAT Output Clock Divisor (N2) Control
04BH, 0CBH, 14BH, 1CBH, 24BH, 2CBH, 34BH, 3CBH	RJAT Configuration
04CH, 0CCH, 14CH, 1CCH, 24CH, 2CCH, 34CH, 3CCH	TJAT Interrupt Status
04DH, 0CDH, 14DH, 1CDH, 24DH, 2CDH, 34DH, 3CDH	TJAT Reference Clock Divisor (N1) Control
04EH, 0CEH, 14EH, 1CEH, 24EH, 2CEH, 34EH, 3CEH	TJAT Output Clock Divisor (N2) Control
04FH, 0CFH, 14FH, 1CFH, 24FH, 2CFH, 34FH, 3CFH	TJAT Configuration
050H, 0D0H, 150H, 1D0H, 250H, 2D0H, 350H, 3D0H	IBCD Configuration
051H, 0D1H, 151H, 1D1H, 251H, 2D1H, 351H, 3D1H	IBCD Interrupt Enable/Status
052H, 0D2H, 152H, 1D2H, 252H, 2D2H, 352H, 3D2H	IBCD Activate Code
053H, 0D3H, 153H, 1D3H, 253H, 2D3H, 353H, 3D3H	IBCD Deactivate Code
054H, 0D4H, 154H, 1D4H, 254H, 2D4H, 354H, 3D4H	CDRC Configuration
055H, 0D5H, 155H, 1D5H, 255H, 2D5H, 355H, 3D5H	CDRC Interrupt Control
056H, 0D6H, 156H, 1D6H, 256H, 2D6H, 356H, 3D6H	CDRC Interrupt Status
057H, 0D7H, 157H, 1D7H, 257H, 2D7H, 357H, 3D7H	CDRC Alternate Loss of Signal
058H, 0D8H, 158H, 1D8H, 258H, 2D8H, 358H, 3D8H	PMON Interrupt Enable/Status
059H, 0D9H, 159H, 1D9H, 259H, 2D9H, 359H, 3D9H	PMON Reserved
05AH, 0DAH, 15AH, 1DAH, 25AH, 2DAH, 35AH, 3DAH	PMON Reserved
05BH, 0DBH, 15BH, 1DBH, 25BH, 2DBH, 35BH, 3DBH	PMON Reserved
05CH, 0DCH, 15CH, 1DCH, 25CH, 2DCH, 35CH, 3DCH	PMON Reserved
05DH, 0DDH, 15DH, 1DDH, 25DH, 2DDH, 35DH, 3DDH	PMON Reserved
05EH, 0DEH, 15EH, 1DEH, 25EH, 2DEH, 35EH, 3DEH	PMON LCV Count (LSB)
05FH, 0DFH, 15FH, 1DFH, 25FH, 2DFH, 35FH, 3DFH	PMON LCV Count (MSB)
060H, 0E0H, 160H, 1E0H, 260H, 2E0H, 360H, 3E0H	PRBS Generator/Checker Control

Addr	Register
061H, 0E1H, 161H, 1E1H, 261H, 2E1H, 361H, 3E1H	PRBS Checker Interrupt Enable/Status
062H, 0E2H, 162H, 1E2H, 262H, 2E2H, 362H, 3E2H	PRBS Pattern Select
063H, 0E3H, 163H, 1E3H, 263H, 2E3H, 363H, 3E3H	PRBS Reserved
064H, 0E4H, 164H, 1E4H, 264H, 2E4H, 364H, 3E4H	PRBS Error Count #1
065H, 0E5H, 165H, 1E5H, 265H, 2E5H, 365H, 3E5H	PRBS Error Count #2
066H, 0E6H, 166H, 1E6H, 266H, 2E6H, 366H, 3E6H	PRBS Error Count #3
067H, 0E7H, 167H, 1E7H, 267H, 2E7H, 367H, 3E7H	PRBS Reserved
068H, 0E8H, 168H, 1E8H, 268H, 2E8H, 368H, 3E8H	XLPG Control/Status
069H, 0E9H, 169H, 1E9H, 269H, 2E9H, 369H, 3E9H	XLPG Pulse Waveform Scale
06AH, 0EAH, 16AH, 1EAH, 26AH, 2EAH, 36AH, 3EAH	XLPG Pulse Waveform Storage Write Address #1
06BH, 0EBH, 16BH, 1EBH, 26BH, 2EBH, 36BH, 3EBH	XLPG Pulse Waveform Storage Write Address #2
06CH, 0ECH, 16CH, 1ECH, 26CH, 2ECH, 36CH, 3ECH	XLPG Pulse Waveform Storage Data
06DH, 0EDH, 16DH, 1EDH, 26DH, 2EDH, 36DH, 3EDH	XLPG Fuse Control
06EH, 0EEH, 16EH, 1EEH, 26EH, 2EEH, 36EH, 3EEH	XLPG Reserved
06FH, 0EFH, 16FH, 1EFH, 26FH, 2EFH, 36FH, 3EFH	XLPG Reserved
070H, 0F0H, 170H, 1F0H, 270H, 2F0H, 370H, 3F0H	RLPS Configuration and Status
071H, 0F1H, 171H, 1F1H, 271H, 2F1H, 371H, 3F1H	RLPS ALOS Detection/Clearance Threshold
072H, 0F2H, 172H, 1F2H, 272H, 2F2H, 372H, 3F2H	RLPS ALOS Detection Period
073H, 0F3H, 173H, 1F3H, 273H, 2F3H, 373H, 3F3H	RLPS ALOS Clearance Period
074H, 0F4H, 174H, 1F4H, 274H, 2F4H, 374H, 3F4H	RLPS Equalization Indirect Address
075H, 0F5H, 175H, 1F5H, 275H, 2F5H, 375H, 3F5H	RLPS Equalization Read/WriteB Select
076H, 0F6H, 176H, 1F6H, 276H, 2F6H, 376H, 3F6H	RLPS Equalizer Loop Status and Control
077H, 0F7H, 177H, 1F7H, 277H, 2F7H, 377H, 3F7H	RLPS Equalizer Configuration



Addr	Register
078H, 0F8H, 178H, 1F8H, 278H, 2F8H, 378H, 3F8H	RLPS Equalization Indirect Data Register
079H, 0F9H, 179H, 1F9H, 279H, 2F9H, 379H, 3F9H	RLPS Equalization Indirect Data Register
07AH, 0FAH, 17AH, 1FAH, 27AH, 2FAH, 37AH, 3FAH	RLPS Indirect Data Register
07BH, 0FBH, 17BH, 1FBH, 27BH, 2FBH, 37BH, 3FBH	RLPS Indirect Data Register
07CH, 0FCH, 17CH, 1FCH, 27CH, 2FCH, 37CH, 3FCH	RLPS Voltage Thresholds #1
07DH, 0FDH, 17DH, 1FDH, 27DH, 2FDH, 37DH, 3FDH	RLPS Voltage Thresholds #2
07EH, 0FEH, 17EH, 1FEH, 27EH, 2FEH, 37EH, 3FEH	RLPS Reserved
07FH, 0FFH, 17FH, 1FFH, 27FH, 2FFH, 37FH, 3FFH	RLPS Reserved
400H – 7FFH	Reserved for Test

**Register 000H: Reset / Revision ID / Device ID**

Bit	Type	Function	Default
Bit 7	R/W	RESET	0
Bit 6	R	TYPE[2]	1
Bit 5	R	TYPE[1]	0
Bit 4	R	TYPE[0]	0
Bit 3	R	ID[3]	0
Bit 2	R	ID[2]	0
Bit 1	R	ID[1]	0
Bit 0	R	ID[0]	1

**RESET**

The RESET bit implements a software reset. If the RESET bit is a logic 1, the OCTLIU-SH is held in reset. This bit is not self-clearing; therefore, a logic 0 must be written to bring the OCTLIU-SH out of reset. Holding the OCTLIU-SH in a reset state effectively puts it into a low-power, stand-by mode. A hardware reset clears the RESET bit, thus deasserting the software reset. The RESET bit must be set for at least 100ns.

**TYPE**

The device identification bits, TYPE[2:0], are set to a fixed value of “100” representing the OCTLIU-SH.

**ID**

The version identification bits, ID[3:0], are set to a fixed value representing the version number of the OCTLIU-SH.

**Register 001H: Global Configuration / Clock Monitor**

Bit	Type	Function	Default
Bit 7	R	XCLKA	X
Bit 6	R	REFCLKA	X
Bit 5	R/W	SIMUL_REGWR	0
Bit 4	R/W	Reserved	0
Bit 3	R/W	RSYNC_SEL[2]	0
Bit 2	R/W	RSYNC_SEL[1]	0
Bit 1	R/W	RSYNC_SEL[0]	0
Bit 0	R/W	E1/T1B	0

**XCLKA**

The XCLK active (XCLKA) bit detects low to high transitions on the XCLK input. XCLKA is set high on a rising edge of XCLK, and is set low when this register is read. A lack of transitions is indicated by the register bit reading low. This register bit may be read at periodic intervals to detect clock failures.

**REFCLKA**

The REFCLK active (REFCLKA) bit detects low to high transitions on the REFCLK input. REFCLKA is set high on a rising edge of REFCLK, and is set low when this register is read. A lack of transitions is indicated by the register bit reading low. This register bit may be read at periodic intervals to detect clock failures.

**SIMUL\_REGWR**

The Simultaneous Register Write (SIMUL\_REGWR) bit enables registers for all 8 octants to be written simultaneously. When SIMUL\_REGWR is set high, a write to an octant register will result in the same data also being written simultaneously to the corresponding registers belonging to the other 7 octants. When SIMUL\_REGWR is set low, a write to a register will result in the addressed register, and that register only, being written.

**Note:**

- SIMUL\_REGWR must be set low prior to reading any OCTLIU-SH register.

### RSYNC\_SEL[2:0]

The RSYNC Select register bits, RSYNC\_SEL[2:0], select the source of the RSYNC OCTLIU-SH output.

- When RSYNC\_SEL[2:0] = "000", octant #1 is selected as the source.
- When RSYNC\_SEL[2:0] = "001", octant #2 is selected as the source.
- When RSYNC\_SEL[2:0] = "010", octant #3 is selected as the source.
- When RSYNC\_SEL[2:0] = "011", octant #4 is selected as the source.
- When RSYNC\_SEL[2:0] = "100", octant #5 is selected as the source.
- When RSYNC\_SEL[2:0] = "101", octant #6 is selected as the source.
- When RSYNC\_SEL[2:0] = "110", octant #7 is selected as the source.
- When RSYNC\_SEL[2:0] = "111", octant #8 is selected as the source.

### E1/T1B

The global E1/T1B bit selects the operating mode of all eight of the OCTLIU-SH octants. If E1/T1B is logic 1, the 2.048 Mbit/s E1 mode is selected for all eight octants. If E1/T1B is logic 0, the 1.544 Mbit/s T1 mode is selected for all eight octants.

### RESERVED

The reserved bit must be set to the default value for normal operation.

**Register 002H: Master Interrupt Source #1**

Bit	Type	Function	Default
Bit 7	R	LIU[8]	X
Bit 6	R	LIU[7]	X
Bit 5	R	LIU[6]	X
Bit 4	R	LIU[5]	X
Bit 3	R	LIU[4]	X
Bit 2	R	LIU[3]	X
Bit 1	R	LIU[2]	X
Bit 0	R	LIU[1]	X

**LIU[8:1]**

The LIU[8:1] register bits allow software to determine which octant's LIU(s) is/are producing an interrupt on the INTB output pin. A logic 1 indicates an interrupt is being produced from the corresponding octant.

Reading this register does not remove the interrupt indication; within the corresponding octant, the corresponding block's interrupt status register must be read to remove the interrupt indication.

**Register 003H: Master Interrupt Source #2**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1	R	EXSBI	X
Bit 0	R	INSBI	X

**INSBI, EXSBI**

The INSBI and EXSBI register bits allow software to determine whether the INSBI and/or EXSBI blocks are producing an interrupt on the INTB output pin. A logic 1 indicates an interrupt is being produced from the corresponding block.

Reading this register does not remove the interrupt indication; the corresponding block's interrupt status register must be read to remove the interrupt indication.

**Register 004H: Master Test Control #1**

Bit	Type	Function	Default
Bit 7	W	Reserved	X
Bit 6	W	Reserved	X
Bit 5	W	Reserved	X
Bit 4	W	Reserved	X
Bit 3	W	Reserved	0
Bit 2	R/W	Reserved	0
Bit 1	W	HIZDATA	0
Bit 0	R/W	HIZIO	0

This register is used to select OCTLIU-SH test features. All bits, except for 7,6,5 and 4 are reset to zero by a hardware reset of the OCTLIU, a software reset of the OCTLIU does not affect the state of the bits in this register.

**HIZIO, HIZDATA**

The HIZIO and HIZDATA bits control the tri-state modes of the OCTLIU-SH. While the HIZIO bit is a logic 1, all digital output pins of the OCTLIU-SH except TDO and the data bus are held in a high-impedance state. The microprocessor interface is still active. While the HIZDATA bit is a logic 1, the data bus is held in a high-impedance state which inhibits microprocessor read cycles. Note that the HIZIO and HIZDATA have no affect on the analog transmit outputs (TXTIP1[1:8], TXTIP2[1:8], TXRING1[1:8] and TXRING2[1:8]).

**Register 005H: Master Test Control #2**

Bit	Type	Function	Default
Bit 7	R/W	Reserved	0
Bit 6	R/W	Reserved	0
Bit 5	R/W	Reserved	0
Bit 4	R/W	Reserved	0
Bit 3	R/W	TXHIZ_LLB_EN	0
Bit 2	R/W	Unused	X
Bit 1	R/W	Unused	X
Bit 0	R/W	Unused	X

**TXHIZ\_LLB\_EN**

Transmitter tri-state or line loopback pin enable. This register bit is used to control the functionality of the TXHIZ/LLB pin. If TXHIZ\_LLB\_EN set to logic 0, the TXHIZ/LLB pin can be used to force the analogue transmitter outputs (TXTIP1[1:8], TXTIP2[1:8], TXRING1[1:8] and TXRING2[1:8]) into a high impedance state. Otherwise, if set to logic 1 the TXHIZ/LLB pin may be used to force all 8 octants into line loopback mode.

**RESERVED**

These bits must be 0 for correct operation.



**Register 006H: CSU Configuration**

Bit	Type	Function	Default
Bit 7	R/W	CSU_RESET	0
Bit 6	R/W	IDDQ_EN	0
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3	R	CSU_LOCK	X
Bit 2	R/W	MODE[2]	0
Bit 1	R/W	MODE[1]	0
Bit 0	R/W	MODE[0]	0

**MODE[2:0]**

The MODE[2:0] selects the mode of the CSU. Table 3 indicates the required XCLK frequency, and output frequencies for each mode.

**Table 3 Clock Synthesis Mode**

MODE[2:0]	XCLK frequency	Transmit clock frequency
000	2.048 MHz	2.048 MHz
001	1.544 MHz	1.544 MHz
01X	Reserved	Reserved
10X	Reserved	Reserved
110	Reserved	Reserved
111	2.048 MHz	1.544 MHz

**CSU\_LOCK**

The CSU\_LOCK bit can be used to determine whether or not the embedded clock synthesis unit (CSU) has achieved phase and frequency lock to XCLK. If the CSU\_LOCK bit is polled repetitively and is persistently a logic 1, then the divided down synthesized clock frequency is within 244 ppm of the XCLK frequency. A persistent logic 0 may indicate a mismatch between the actual and expected XCLK frequency or a problem with the analogue supplies (CAVS and CAVD).

**IDDQ\_EN**

The IDDQ enable bit (IDDQ\_EN) is used to configure the embedded CSU for IDDQ tests. When IDDQ\_EN is a logic 1, or the IDDQEN bit in the Master Test Control #1 register is a logic 1, the digital outputs of the CSU are pulled to ground. When either the IDDQ\_EN bit or IDDQEN bit is set to logic 1, the HIGHZ bit in the XLPG Line Driver Configuration register must also be set to logic 1.

## CSU\_RESET

Setting the CSU\_RESET bit to logic 1 causes the embedded CSU to be forced to a frequency much lower than normal operation.

Downloaded by ahmed metwaly of siliconexpert on Monday, 06 January, 2003 06:07:44 AM

**Register 008H, 088H, 108H, 188H, 208H, 288H, 308H, 388H:  
Receive Line Interface Configuration #1**

Bit	Type	Function	Default
Bit 7	R/W	LLB_AIS	0
Bit 6	R/W	AUTO_LLB	0
Bit 5	R/W	LOS_SBI	0
Bit 4	R/W	LOS_AIS	0
Bit 3	R/W	Reserved	0
Bit 2	R/W	BPV	0
Bit 1	R/W	Reserved	0
Bit 0	R/W	RX_PRBS_ENB	1

**LLB\_AIS**

When the LLB\_AIS bit is set to logic 1, the LIU will generate AIS on the receive data output whenever line loopback is active. When the LLB\_AIS bit is set to logic 0, the LIU receive path will operate normally, regardless of whether or not line loopback is active. If LLB\_AIS is logic 0, AIS may be inserted manually via the RAIS register bit.

**AUTO\_LLB**

When the AUTO\_LLB bit is set to logic 1, the LIU will activate and deactivate line loopback automatically upon detection of the line loopback activate/deactivate codes by the IBCD. The AUTO\_LLB bit is only valid in T1 mode and must be set to logic 0 in E1 mode. If line loopback is entered using the activate code (AUTO\_LLB), the LINELB bit (in the Line Interface Diagnostics Register) cannot be used to exit the loopback state. Likewise, if the loopback state is entered via the LINELB bit, the deactivate code cannot be used to exit the loopback state.

**LOS\_SBI**

The LOS\_SBI bit enables the indication of loss of signal over the SBI interface. When LOS\_SBI is set to logic 1, loss of signal will result in the ALM (alarm) bit of the affected tributary being asserted on the SBI interface. When LOS\_SBI is set to logic 0, the tributary's ALM bit will be set to 0.

**LOS\_AIS**

If the LOS\_AIS bit is logic 1, AIS is inserted in the receive path for the duration of a loss of signal condition. The AIS condition will be de-asserted once a pulse is detected by the CDRC. If LOS\_AIS is logic 0, AIS may be inserted manually via the RAIS register bit.

## BPV

In T1 mode, the BPV bit enables only bipolar violations to indicate line code violations and be accumulated in the PMON LCV Count Registers. When BPV is set to logic 1, BPVs (provided they are not part of a valid B8ZS signature if B8ZS line coding is used) generate an LCV indication and increment the PMON LCV counter. When BPV is set to logic 0, both BPVs (provided they are not part of a valid B8ZS signature if B8ZS line coding is used) and excessive zeros (EXZ) generate an LCV indication and increment the PMON LCV counter. Excessive zeros is a sequence of zeros greater than fifteen bits long for an AMI-coded signal and greater than seven bits long for a B8ZS-coded signal.

In E1 mode, the BPV bit enables only bipolar violations to indicate line code violations and be accumulated in the PMON LCV Count Registers. (The O162 bit in the CDRC Configuration register provides two E1 LCV definitions.) When BPV is set to logic 1, BPVs (provided they are not part of a valid HDB3 signature if HDB3 line coding is used) generate an LCV indication and increment the PMON LCV counter. When BPV is set to logic 0, both BPVs (provided they are not part of a valid HDB3 signature if HDB3 line coding is used) and excessive zeros (EXZ) generate an LCV indication and increment the PMON LCV counter. Excessive zeros is a sequence of zeros greater than four bits long for an HDB3-coded signal. When HDB3 decoding is disabled in E1 mode (AMI bit in CDRC Configuration Register = 1), excessive zeros do not generate an LCV indication regardless of the setting of the BPV bit.

## RX\_PRBS\_ENB

The Receive Pseudo Random Generator Enable (RX\_PRBS\_ENB) register bit must be set to logic 0 (active low) when the corresponding RX\_GEN register bit in the Line Interface PRBS Position register is set to logic 1. Otherwise RX\_PRBS\_GEN must be set to logic 1.

## RESERVED

These bits must set to logic 0 for correct operation.

**Register 009H, 089H, 109H, 189H, 209H, 289H, 309H, 389H:  
Receive Line Interface Configuration #2**

Bit	Type	Function	Default
Bit 7	R/W	RJATBYP	1
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2	R/W	RSYNC_ALOSB	0
Bit 1	R/W	RSYNC_MEM	0
Bit 0	R/W	RSYNCSEL	0

**RJATBYP**

The RJATBYP bit disables jitter attenuation in the receive direction. When receive jitter attenuation is not being used, setting RJATBYP to logic 1 will reduce the latency through the receiver section by typically 40 bits. When RJATBYP is set to logic 0, the LIU's RSYNC output is jitter attenuated. When the RJAT is bypassed, the octant's RSYNC is not jitter attenuated.

**RSYNC\_ALOSB**

The RSYNC\_ALOSB bit controls the source of the loss of signal condition used to control the behaviour of the receive reference presented on the RSYNC output. If RSYNC\_ALOSB is a logic 0, analogue loss of signal is used. If RSYNC\_ALOSB is a logic 1, digital loss of signal is used. When the LIU is in a loss of signal state, the RSYNC output is derived from XCLK or held high, as determined by the RSYNC\_MEM bit. When the LIU is not in a loss of signal state, the RSYNC output is derived from the receive recovered clock of the selected octant.

The octant to be used as the source of RSYNC is determined by the RSYNC\_SEL[2:0] bits.

**RSYNC\_MEM**

The RSYNC\_MEM bit controls the octant's RSYNC output under a loss of signal condition (as determined by the RSYNC\_ALOSB register bit). When RSYNC\_MEM is a logic 1, the octant's RSYNC output is held high during a loss of signal condition. When RSYNC\_MEM is a logic 0, the octant's RSYNC output is derived from the CSU 1x line rate clock during a loss of signal condition.

## RSYNCSEL

The RSYNCSEL bit selects the frequency of the receive reference presented on the octant's RSYNC output. If RSYNCSEL is a logic 1, the octant's RSYNC will be an 8 kHz clock. If RSYNCSEL is a logic 0, the octant's RSYNC will be a 1.544 MHz (T1) or 2.048 MHz (E1) clock.

**Register 00AH, 08AH, 10AH, 18AH, 20AH, 28AH, 30AH, 38AH:  
Transmit Line Interface Configuration**

Bit	Type	Function	Default
Bit 7	R/W	TJATBYP	0
Bit 6	R/W	TAISEN	0
Bit 5	R/W	TAUXP	0
Bit 4	R/W	SBI_AIS	1
Bit 3	R/W	Reserved	0
Bit 2	R/W	AMI	0
Bit 1	R/W	Reserved	0
Bit 0	R/W	Reserved	1

**TJATBYP**

The TJATBYP bit enables the transmit jitter attenuator to be removed from the transmit data path. When the transmit jitter attenuator is bypassed, the latency through the transmitter section is reduced by typically 40 bits.

**TAISEN**

The TAISEN bit enables the interface to generate an unframed all-ones AIS alarm on the TXTIP[n] and TXRING[n]. When TAISEN is set to logic 1, the bipolar TXTIP[n] and TXRING[n] outputs are forced to pulse alternately, creating an all-ones signal. The transition to transmitting AIS on the TXTIP[n] and TXRING[n] outputs is done in such a way as to avoid introducing any bipolar violations.

The diagnostic digital loopback point is prior to the AIS insertion point.

**TAUXP**

The TAUXP bit enables the interface to generate an unframed alternating zeros and ones (i.e. 010101...) auxiliary pattern (AUXP) on the TXTIP[n] and TXRING[n]. When TAUXP is set to logic 1, the bipolar TXTIP[n] and TXRING[n] outputs are forced to pulse alternately every other cycle. The transition to transmitting AUXP on the TXTIP[n] and TXRING[n] outputs is done in such a way as to avoid introducing any bipolar violations.

The diagnostic digital loopback point is prior to the AUXP insertion point.

### SBI\_AIS

The SBI\_AIS bit enables the insertion of AIS in the transmit path in response to an alarm indication from the SBI interface. When SBI\_AIS is set to logic 1, setting the ALM (alarm) bit of a tributary on the SBI interface causes the bipolar TXTIP[n] and TXRING[n] outputs to be forced to pulse alternately, creating an all-ones signal. The transition to transmitting AIS on the TXTIP[n] and TXRING[n] outputs is done in such a way as to avoid introducing any bipolar violations.

The diagnostic digital loopback point is prior to the AIS insertion point.

### AMI

The AMI bit enables AMI line coding. If AMI is set to a logic 1, the LIU will perform AMI line encoding on the input data stream. If AMI is set to a logic 0, the LIU will perform B8ZS (if operating in T1 mode) or HDB3 (if operating in E1 mode) line encoding on the input data stream.

### RESERVED:

These bits must be set to their default value for correct operation.



**Register 00BH, 08BH, 10BH, 18BH, 20BH, 28BH, 30BH, 38BH:  
Transmit Timing Options / Clock Monitor / Pulse Template Selection**

Bit	Type	Function	Default
Bit 7	R/W	PT_SEL[3]	0
Bit 6	R/W	PT_SEL[2]	0
Bit 5	R/W	PT_SEL[1]	0
Bit 4	R/W	PT_SEL[0]	0
Bit 3	R	UnusedReserved	X
Bit 2	R/W	OCLKSEL	0
Bit 1	R/W	PLLREF[1]	0
Bit 0	R/W	PLLREF[0]	0

**PT\_SEL[3:0]**

The Pulse Template Selection (PT\_SEL[3:0]) bits determine which of the twelve pulse template waveforms stored in the XLPG is used to generate transmit data pulses on the TXTIP[n] and TXRING[n] outputs. PT\_SEL[3:0] must be set to a value between 0 and 11.

**OCLKSEL**

The OCLKSEL bit selects the source of the Transmit Jitter Attenuator FIFO output clock signal.

**Table 4 TJAT FIFO Output Clock Source**

OCLKSEL	Source of FIFO Output Clock
0	The TJAT FIFO output clock is connected to the internal jitter-attenuated 1.544 MHz or 2.048 MHz clock.
1	The TJAT FIFO output clock is connected to the FIFO input clock. In this mode the jitter attenuation is disabled and the input clock must be jitter-free. PLLREF[1:0] must be set to "00" in this mode.

**PLLREF**

The PLLREF bit selects the source of the Transmit Jitter Attenuator phase locked loop reference signal as follows:

**Table 5 TJAT PLL Source**


PLLREF[1:0]	Source of PLL Reference
00	TJAT FIFO input clock (either the transmit clock or the receive recovered clock, as selected by LINELB)
01	Receive recovered clock
1X	CSU transmit clock (see Table 3)

Upon reset of the OCTLIU-SH, the OCLKSEL and PLLREF bits are cleared to zero, selecting jitter attenuation with transmit line clock referenced to the transmit clock (the SBI tributary clock). Figure 12 illustrates the various bit setting options, with the reset condition highlighted.

**Note:**

- The recommended mode of operation is:  
OCLKSEL = 0,  
PLLREF[1:0] = 00 for intrinsically timed applications, or  
PLLREF[1:0] = 01 for loop-timed applications.

**Figure 12 Transmit Timing Options**

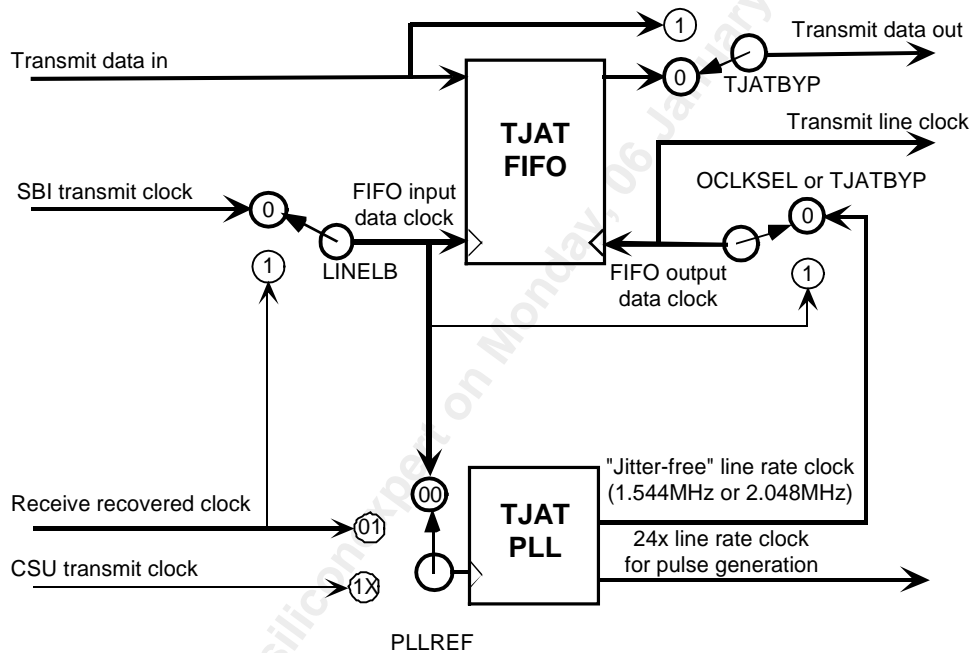

**Register 00CH, 08CH, 10CH, 18CH, 20CH, 28CH, 30CH, 38CH:  
Line Interface Interrupt Source #1 / PMON Update**

Bit	Type	Function	Default
Bit 7	R	PMON	X
Bit 6	R	PRBS	X
Bit 5	R	IBCD	X
Bit 4	R	PDVD	X
Bit 3	R	XPDE	X
Bit 2	R	TJAT	X
Bit 1	R	RJAT	X
Bit 0	R	CDRC	X

This register allows software to determine the block which produced the interrupt on the INTB output pin. A logic 1 indicates an interrupt was produced from the block.

Reading this register does not remove the interrupt indication; the corresponding block's interrupt status register must be read to remove the interrupt indication.

Writing any value to this register causes the octant's performance monitor LCV counter and PRBS error counter to be updated.

**Register 00DH, 08DH, 10DH, 18DH, 20DH, 28DH, 30DH, 38DH:  
Line Interface Interrupt Source #2**

Bit	Type	Function	Default
Bit 7	R	Reserved	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1		Unused	X
Bit 0	R	RLPS	X

This register allows software to determine the block that produced the interrupt on the INTB output pin. A logic 1 indicates an interrupt was produced from the block.

Reading this register does not remove the interrupt indication; the corresponding block's interrupt status register must be read to remove the interrupt indication.

**Register 00EH, 08EH, 10EH, 18EH, 20EH, 28EH, 30EH, 38EH:  
Line Interface Diagnostics**

Bit	Type	Function	Default
Bit 7	R/W	PO_EN	0
Bit 6	R	PI_S	X
Bit 5	R/W	LCVINS	0
Bit 4	R/W	LINELB	0
Bit 3	R/W	RAIS	0
Bit 2	R/W	DDLB	0
Bit 1	R/W	Reserved	0
Bit 0	R/W	Reserved	0

**PO\_EN**

The programmable output enable (PO\_EN) register bit is used to control the state of the PO output pin. When PO\_EN is set to logic 1 the PO output is set to logic 1. Otherwise when PO\_EN is set to logic 0 the PO output is set to logic 0.

**Note:**

- This register bit is only available in register 00EH.

**PI\_S**

The programmable input status (PI\_S) register bit is used to read the status of the PI input. Reading this register latches the state of the PI input.

**Note:**

- This register bit is only available in register 00EH.

**LCVINS**

The LCVINS bit introduces a single line code violation on the transmitted data stream. In B8ZS, the violation is generated by masking the first violation pulse of a B8ZS signature. In AMI, one pulse is sent with the same polarity as the previous pulse. In HDB3, the violation is generated by causing the next HDB3-code generated bipolar violation pulse to be of the same polarity as the previous bipolar violation. To generate another violation, this bit must first be written to 0 and then to logic 1 again. At least one bit period should elapse between writing LCVINS 0 and writing it 1 again, or vice versa, if an error is to be successfully inserted.

## LINELB

The LINELB bit selects the line loopback mode, where the recovered data are internally directed to the digital inputs of the transmit jitter attenuator. The data sent to the TJAT is the recovered data from the output of the CDRC block. When LINELB is set to logic 1, the line loopback mode is enabled. When LINELB is set to logic 0, the line loopback mode is disabled. Note that when line loopback is enabled, to correctly attenuate the jitter on the receive clock, the contents of the TJAT Reference Clock Divisor and Output Clock Divisor registers should be programmed to ~~2FFH~~ in both T1 and E1 mode / ~~FFH in E1 mode~~ and the Transmit Timing Options register should be cleared to all zeros. Only one of LINELB and DDLB can be enabled at any one time.

If line loopback is entered using the activate code (AUTO\_LLB in Receive Line Interface Configuration #1 register), the LINELB bit cannot be used to exit the loopback state. Likewise, if the loopback state is entered via the LINELB bit, the deactivate code cannot be used to exit the loopback state.

## RAIS

When the RAIS bit is set to logic 1, the receive output data stream of the octant is forced to all ones.

## DDLB

The DDLB bit selects the diagnostic digital loopback mode, where the octant is configured to internally direct the output of the TJAT to the inputs of the receiver section. The dual-rail RZ outputs of the TJAT are directed to the dual-rail inputs of the CDRC. When DDLB is set to logic 1, the diagnostic digital loopback mode is enabled. When DDLB is set to logic 0, the diagnostic digital loopback mode is disabled. Only one of LINELB and DDLB can be enabled at any one time.

## RESERVED

These bits must be a logic 0 for correct operation.

**Register 00FH, 08FH, 10FH, 18FH, 20FH, 28FH, 30FH, 38FH: Line Interface PRBS Position**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2	R/W	TX_GEN	0
Bit 1	R/W	RX_GEN	0
Bit 0	R/W	TX_DET	0

**TX\_GEN**

The Transmit Path Generate, TX\_GEN, bit controls the output of the PRBS generator. When TX\_GEN is set to logic 1, the PRBS generator output is inserted into the transmit path. When TX\_GEN is set to logic 0, the transmit path functions normally.

**Note:**

- TX\_GEN and RX\_GEN PRBS generation cannot be enabled at the same time. The transmit PRBS data has priority over the inband code data stream generated by the XIBC.

**RX\_GEN**

The Receive Path Generate, RX\_GEN, bit controls the output of the PRBS generator. When RX\_GEN is set to logic 1, the PRBS generator output is inserted into the receive path. When RX\_GEN is set to logic 0, the receive path functions normally. The corresponding RX\_PRBS\_ENB register bit in the Receive Line Interface Configuration #1 register must be set logic 0 when RX\_GEN is set to logic 1.

**Note:**

- TX\_GEN and RX\_GEN PRBS generation cannot be enabled at the same time.

**TX\_DET**

The Transmit Path Detect, TX\_DET, bit controls the input of the PRBS checker. When TX\_DET is set to logic 1, the PRBS checker monitors the transmit path. When TX\_DET is set to logic 0, the PRBS detector monitors the receive path.

**Register 310H: INSBI Control**

Bit	Type	Function	Default
Bit 7	R/W	APAGE	0
Bit 6	R/W	DC_ENBL	1
Bit 5	R/W	DC_INT_EN	0
Bit 4	R/W	FIFO_OVRE	0
Bit 3	R/W	FIFO_UDRE	0
Bit 2	R/W	TS_EN	0
Bit 1		Unused	X
Bit 0	R/W	SBI_PAR_CTL	1

**SBI\_PAR\_CTL**

The SBI\_PAR\_CTL bit is used to configure the Parity mode for generation of the SBI data parity signal, DDP as follows:

- When SBI\_PAR\_CTL is a '0' parity will be even.
- When SBI\_PAR\_CTL is a '1' parity will be odd.

**TS\_EN**

The TS\_EN bit is used to enable the LIU octant data stream to SBI tributary mapping capability.

- When TS\_EN is a '0', the mapping is fixed to a one to one mapping and is not programmable. The 8 LIU data streams are mapped to tributaries 1 to 8 of SPE #1 within the SBI structure.
- When TS\_EN is a '1', LIU octant data stream to SBI tributary mapping is enabled and is specified by the contents of the INSBI Tributary Mapping registers.

**FIFO\_UDRE**

The FIFO\_UDRE bit is used to enable/disable the generation of an interrupt when a FIFO underrun is detected.

- When FIFO\_UDRE is a '0' underrun interrupt generation is disabled.
- When FIFO\_UDRE is a '1' underrun interrupt generation is enabled.

**FIFO\_OVRE**

The FIFO\_OVRE bit is used to enable/disable the generation of an interrupt when a FIFO overrun is detected.

- When FIFO\_OVRE is a '0' overrun interrupt generation is disabled.
- When FIFO\_OVRE is a '1' overrun interrupt generation is enabled.



#### DC\_INT\_EN

This bit is set to enable the generation of an interrupt when either of the following events occurs:

- A Depth Check error
- An external resynchronization event occurs on the DC1FP signal

#### DC\_ENBL

This bit enables depth check resets. The depth checker periodically monitors the link FIFO depths and compares them against the read and write pointers. Discrepancies are reported in the Depth Checker Interrupt Status Register. If DC\_ENBL is '1', the affected link is automatically reset. If DC\_ENBL is '0', the link is not reset.

#### APAGE

The tributary mapping register active page select bit (APAGE) controls the selection of one of two pages of tributary mapping registers. When APAGE is set low, the configuration in page A of the tributary mapping registers is used to associate SBI tributaries to LIU octant data streams. When APAGE is set high, the configuration in page B of the tributary mapping registers is used to associate SBI tributaries to LIU octant data streams. When APAGE changes state, any data streams where the mapping registers do not match are automatically reset.

**Note:**

- The APAGE bit should not be changed when TS\_EN is logic 0.

**Register 311H: INSBI FIFO Underrun Interrupt Status**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R	LINK[3]	0
Bit 3	R	LINK[2]	0
Bit 2	R	LINK[1]	0
Bit 1	R	LINK[0]	0
Bit 0	R	FIFO_UDRI	0

Back to back reads of this register must be at least 250 ns apart.

This Underrun interrupt register is the output of a priority encoder of the underrun history of all links. The most significant links have the highest priority and will be reported first if underruns simultaneously occur on multiple links.

If bit 0 is zero, no links have entered underrun since the last read, and all pending underrun notifications have been reported. Bits 1-4 should be ignored.

If bit 0 is one, the register contents are valid, and indicate a link has entered underrun since the last read, or a prior notification was still pending. Continue reading this register, recording all entries, until bit 0 is zero, indicating that no more pending entries are present.

**Note:** If a tributary is misbehaving so that it frequently enters underrun, the reporting of the multiple underruns can prevent the reporting of underrun on lower priority links. Such misbehaving links should be disabled (ENBLx=0, Register 323H) to obtain the complete underrun history.

**FIFO\_UDRI**

This bit is set when a FIFO underrun is detected. It is cleared when the register is read (but may be set again immediately thereafter if a further underrun report is pending).

**LINK[3:0]**

The LINK[3:0] field is used to specify the LIU octant data stream associated with the FIFO buffer in which the underrun was detected. LINK[3:0] should only be looked at when FIFO\_UDRI is a '1'. Valid values of LINK[3:0] are from 1 to 8.

This register will contain the interrupt status even if the corresponding interrupt enable is not set. Interrupts are reported such that link 1 has highest priority.

**Register 312H: INSBI FIFO Overrun Interrupt Status**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R	LINK[3]	0
Bit 3	R	LINK[2]	0
Bit 2	R	LINK[1]	0
Bit 1	R	LINK[0]	0
Bit 0	R	FIFO_OVRI	0

Back to back reads of this register must be at least 250 ns apart.

This Overrun interrupt register is the output of a priority encoder of the overrun history of all links. The most significant links have the highest priority and will be reported first if overruns simultaneously occur on multiple links.

If bit 0 is zero, no links have overrun since the last read, and all pending overrun notifications have been reported. Bits 1-4 should be ignored.

If bit 0 is one, the register contents are valid, and indicate a link has overrun since the last read, or a prior notification was still pending. Continue reading this register, recording all entries, until bit 0 is zero, indicating that no more pending entries are present.

**Note:** If a tributary is misbehaving so that it frequently overruns, the reporting of the multiple overruns can prevent the reporting of overruns on lower priority links. Such misbehaving links should be disabled (ENBLx=0, Register 323H) to obtain the complete overrun history.

**FIFO\_OVRI**

This bit is set when a FIFO overrun is detected. It is cleared when the register is read (but may be set again immediately thereafter if a further overrun report is pending).

**LINK[3:0]**

The LINK[3:0] field is used to specify the LIU octant data stream associated with the FIFO buffer in which the overrun was detected. LINK[3:0] should only be looked at when FIFO\_OVRI is a '1'. Valid values of LINK[3:0] are from 1 to 8.

This register will contain the interrupt status even if the corresponding interrupt enable is not set. Interrupts are reported such that link 1 has highest priority.

**Register 313H – 31AH: INSBI Page A Octant to Tributary Mapping #1 - #8**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6	R/W	SPE[1]	0
Bit 5	R/W	SPE[0]	0
Bit 4	R/W	TRIB[4]	0
Bit 3	R/W	TRIB[3]	0
Bit 2	R/W	TRIB[2]	0
Bit 1	R/W	TRIB[1]	0
Bit 0	R/W	TRIB[0]	0

**SPE[1:0] and TRIB[4:0]**

The SPE[1:0] and TRIB[4:0] fields are used to specify the LIU octant data stream to SBI tributary mapping when APAGE is set to 0. The output of the octant corresponding to the register (1-8) is mapped to the SPE and tributary specified by the value of SPE[1:0] and TRIB[4:0]. Valid values of SPE[1:0] are from 1 to 3. Valid values of TRIB[4:0] are from 1 to 28 in T1 mode and from 1 to 21 in E1 mode.

**Note:**

- The mapping of more than one tributary to the same LIU octant data stream or more than one LIU octant data stream to the same tributary is not allowed. Special care must be taken to ensure that all LIU octants and tributaries are uniquely mapped when using multiple OCTLIU-SH's on the same SBI bus. Failure to do so will result in bus contention.

**Register 31BH – 322H: INSBI Page B Octant to Tributary Mapping #1 - #8**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6	R/W	SPE[1]	0
Bit 5	R/W	SPE[0]	0
Bit 4	R/W	TRIB[4]	0
Bit 3	R/W	TRIB[3]	0
Bit 2	R/W	TRIB[2]	0
Bit 1	R/W	TRIB[1]	0
Bit 0	R/W	TRIB[0]	0

**SPE[1:0] and TRIB[4:0]**

The SPE[1:0] and TRIB[4:0] fields are used to specify the LIU octant data stream to SBI tributary mapping when APAGE is set to 1. The output of the octant corresponding to the register (1-8) is mapped to the SPE and tributary specified by the value of SPE[1:0] and TRIB[4:0]. Valid values of SPE[1:0] are from 1 to 3. Valid values of TRIB[4:0] are from 1 to 28 in T1 mode and from 1 to 21 in E1 mode.

**Note:**

- The mapping of more than one tributary to the same LIU octant data stream or more than one LIU octant data stream to the same tributary is not allowed. Special care must be taken to ensure that all LIU octants and tributaries are uniquely mapped when using multiple OCTLIU-SH's on the same SBI bus. Failure to do so will result in bus contention.

**Register 323H: INSBI Link Enable**

Bit	Type	Function	Default
Bit 7	R/W	ENBL8	0
Bit 6	R/W	ENBL7	0
Bit 5	R/W	ENBL6	0
Bit 4	R/W	ENBL5	0
Bit 3	R/W	ENBL4	0
Bit 2	R/W	ENBL3	0
Bit 1	R/W	ENBL2	0
Bit 0	R/W	ENBL1	0

**ENBL1 – ENBL8**

The ENBLx bits are used to enable the LIU octant data streams. Setting the ENBL bit for a particular LIU octant data stream enables the INSBI8 to take data from the octant and transmit that data to the SBI tributary mapped to that stream.

**Register 324H: INSBI Link Enable Busy**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1		Unused	X
Bit 0	R	BUSY	0

**BUSY**

A write to the INSBI Link Enable Register sets BUSY to '1'. BUSY is cleared to '0' approximately three REFCLK cycles later after the register contents have been synchronized to REFCLK.

The user must check that BUSY is '0' before writing to the INSBI Link Enable Register.

Following a reset, BUSY will be '1' until startup circuitry has finished automatically initializing certain RAMs within INSBI.

**Register 325H – 32CH: INSBI Tributary Control #1 – #8**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R/W	Reserved	0
Bit 3	R/W	Reserved	0
Bit 2	R/W	Reserved	1
Bit 1	R/W	Reserved	0
Bit 0	R/W	Reserved	0

A tributary control register should only be written when the associated ENBLx bit is '0'.

**RESERVED:**

The reserved bits must be set to their default value for correct operation of the OCTLIU-SH device.



**Register 32DH: INSBI Minimum Depth**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3	R/W	MIN_DEP[3]	0
Bit 2	R/W	MIN_DEP[2]	1
Bit 1	R/W	MIN_DEP[1]	1
Bit 0	R/W	MIN_DEP[0]	1

**MIN\_DEP [3:0]**

The MIN\_DEPTH[3:0] bits specify the tributary FIFO Minimum Depth, i.e. the depth that must be reached before the FIFO reader starts to take data from the FIFO.

**Register 32EH: INSBI FIFO Thresholds**

Bit	Type	Function	Default
Bit 7	R/W	MIN_THR[3]	0
Bit 6	R/W	MIN_THR[2]	1
Bit 5	R/W	MIN_THR[1]	1
Bit 4	R/W	MIN_THR[0]	0
Bit 3	R/W	MAX_THR[3]	1
Bit 2	R/W	MAX_THR[2]	1
Bit 1	R/W	MAX_THR[1]	1
Bit 0	R/W	MAX_THR[0]	0

**MIN\_THR[3:0]**

The MIN\_THR[3:0] bits specify the tributary FIFO minimum threshold, i.e. the FIFO depth below which a positive justification is performed.

**Note:**

- The recommended value for MIN\_THR[3:0] is “0010”, which is not the default value following device reset.

**MAX\_THR[3:0]**

The MAX\_THR[3:0] bits specify the tributary FIFO maximum threshold, i.e. the FIFO depth which when exceeded will cause a negative justification.

**Note:**

- The recommended value for MAX\_THR[3:0] is “1010”, which is not the default value following device reset.

**Register 331H: INSBI Depth Check Interrupt Status**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R	LINK[3]	0
Bit 3	R	LINK[2]	0
Bit 2	R	LINK[1]	0
Bit 1	R	LINK[0]	0
Bit 0	R	DCR_INTI	0

**DCR\_INTI**

This bit is set when a depth check error is detected. It is cleared when the register is read (but may be set again immediately thereafter if a further depth check error report is pending).

**LINK[3:0]**

The LINK[3:0] field is used to specify the LIU octant data stream associated with the FIFO buffer in which the depth check error was detected. LINK[3:0] should only be looked at when DCR\_INTI is a '1'. Valid values for LINK[3:0] are from 1 to 8.

This register will contain the interrupt status even if the corresponding interrupt enable is not set. Link 1 has the highest priority.

**Register 332H: INSBI Master Interrupt Status**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5	R	DCR_INTI_SHDW	0
Bit 4		Unused	X
Bit 3	R	FIFO_UDRI_SHDW	0
Bit 2	R	FIFO_OVRI_SHDW	0
Bit 1		Unused	X
Bit 0	R	C1FP_SYNC_INTI	0

**C1FP\_SYNC\_INTI**

This bit is set when a DC1FP realignment has been detected. It is cleared when the register is read.

**FIFO\_OVRI\_SHDW**

This bit is a shadow of the FIFO\_OVRI bit in the INSBI FIFO Over Run Interrupt Status Register. It is set when the FIFO\_OVRI bit is set and the interrupt enable FIFO\_OVRE is set. Reading this register has no affect on the interrupt status.

**FIFO\_UDRI\_SHDW**

This bit is a shadow of the FIFO\_UDRI bit in the INSBI FIFO Under Run Interrupt Status Register. It is set when the FIFO\_UDRI bit is set and the interrupt enable FIFO\_UDRE is set. Reading this register has no affect on the interrupt status.

**DCR\_INTI\_SHDW**

This bit is a shadow of the DCR\_INTI bit in the INSBI Depth Check Interrupt Status Register. It is set when the DCR\_INTI bit is set and the interrupt enable DCR\_INT\_EN is set. Reading this register has no affect on the interrupt status.

**Register 390H: EXSBI Control**

Bit	Type	Function	Default
Bit 7	R/W	APAGE	0
Bit 6	R/W	DC_ENBL	1
Bit 5	R/W	DC_INT_EN	0
Bit 4	R/W	FIFO_OVRE	0
Bit 3	R/W	FIFO_UDRE	0
Bit 2	R/W	TS_EN	0
Bit 1	R/W	SBI_PERR_EN	0
Bit 0	R/W	SBI_PAR_CTL	1

**SBI\_PAR\_CTL**

The SBI\_PAR\_CTL bit is used to configure the Parity mode for checking of the SBI data parity signal, ADP as follows:

- When SBI\_PAR\_CTL is a '0' parity will be even.
- When SBI\_PAR\_CTL is a '1' parity will be odd.

**SBI\_PERR\_EN**

The SBI\_PERR\_EN bit is used to enable the SBI Parity Error interrupt generation

- When SBI\_PERR\_EN is '0' SBI Parity Error Interrupts will be disabled
- When SBI\_PERR\_EN is '1' SBI Parity Error Interrupts will be enabled

In both cases the SBI Parity checker logic will update the SBI Parity Error Interrupt Reason Register.

**TS\_EN**

The TS\_EN bit is used to enable the SBI tributary to LIU octant data stream mapping capability.

- When TS\_EN is a '0', the mapping is fixed to a one to one mapping and is not programmable. Tributaries 1 to 8 of SPE #1 within the SBI structure are mapped to the 8 LIU data streams.
- When TS\_EN is a '1', SBI tributary to LIU octant data stream mapping is enabled and is specified by the contents of the EXSBI Tributary Mapping registers.

**FIFO\_UDRE**

The FIFO\_UDRE bit is used to enable/disable the generation of an interrupt when a FIFO underrun is detected.

- When FIFO\_UDRE is a '0' underrun interrupt generation is disabled.

- When FIFO\_UDRE is a '1' underrun interrupt generation is enabled.

#### FIFO\_OVRE

The FIFO\_OVRE bit is used to enable/disable the generation of an interrupt when a FIFO overrun is detected.

- When FIFO\_OVRE is a '0' overrun interrupt generation is disabled.
- When FIFO\_OVRE is a '1' overrun interrupt generation is enabled.

#### DC\_INT\_EN

This bit is set to enable the generation of an interrupt when either of the following events occurs:

- A Depth Check error
- An external resynchronization event occurs on the AC1FP signal

#### DC\_ENBL

This bit enables depth check resets. The depth checker periodically monitors the link FIFO depths and compares them against the read and write pointers. Discrepancies are reported in the Depth Checker Interrupt Status Register. If DC\_ENBL is '1', the affected link is automatically reset. If DC\_ENBL is '0', the link is not reset.

#### APAGE

The tributary mapping active page select bit (APAGE) controls the group of mapping registers used to associate SBI tributaries and LIU octant data streams. When mapping is enabled and APAGE is low, the A set of mapping registers (0x3A8 to 0x3AF) is used. When mapping is enabled and APAGE is high, the B set of mapping registers (0x3B0 to 0x3B7) is used. When APAGE changes state, any data streams where the mapping registers do not match are automatically reset.

**Note:**

- The APAGE should not be changed when TS\_EN is logic 0.

**Register 391H: EXSBI FIFO Underrun Interrupt Status**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R	LINK[3]	0
Bit 3	R	LINK[2]	0
Bit 2	R	LINK[1]	0
Bit 1	R	LINK[0]	0
Bit 0	R	FIFO_UDRI	0

Back to back reads of this register must be at least 250 ns apart.

This Underrun interrupt register is the output of a priority encoder of the underrun history of all links. The most significant links have the highest priority and will be reported first if underruns simultaneously occur on multiple links.

If bit 0 is zero, no links have entered underrun since the last read, and all pending underrun notifications have been reported. Bits 1-4 should be ignored.

If bit 0 is one, the register contents are valid, and indicate a link has entered underrun since the last read, or a prior notification was still pending. Continue reading this register, recording all entries, until bit 0 is zero, indicating that no more pending entries are present.

**Note:** If a tributary is misbehaving so that it frequently enters underrun, the reporting of the multiple underruns can prevent the reporting of underrun on lower priority links. Such misbehaving links should be disabled (LINK\_ENBL[x]=0, Register 398H) to obtain the complete underrun history.

**FIFO\_UDRI**

This bit is set when a FIFO underrun is detected. It is cleared when the register is read.

**LINK[3:0]**

The LINK[3:0] field is used to specify the LIU octant data stream associated with the FIFO buffer in which the underrun was detected. LINK[3:0] should only be looked at when FIFO\_UDRI is a '1'. Valid values of LINK[3:0] are from 1 to 8.

This register will contain the interrupt status even if the corresponding interrupt enable is not set. Link 1 has the highest priority.

**Register 392H: EXSBI FIFO Overrun Interrupt Status**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R	LINK[3]	0
Bit 3	R	LINK[2]	0
Bit 2	R	LINK[1]	0
Bit 1	R	LINK[0]	0
Bit 0	R	FIFO_OVRI	0

Back to back reads of this register must be at least 250 ns apart.

This Overrun interrupt register is the output of a priority encoder of the overrun history of all links. The most significant links have the highest priority and will be reported first if overruns simultaneously occur on multiple links.

If bit 0 is zero, no links have overrun since the last read, and all pending overrun notifications have been reported. Bits 1-4 should be ignored.

If bit 0 is one, the register contents are valid, and indicate a link has overrun since the last read, or a prior notification was still pending. Continue reading this register, recording all entries, until bit 0 is zero, indicating that no more pending entries are present.

**Note:** If a tributary is misbehaving so that it frequently overruns, the reporting of the multiple overruns can prevent the reporting of overruns on lower priority links. Such misbehaving links should be disabled (LINK\_ENBL[x]=0, Register 398H) to obtain the complete overrun history.

**FIFO\_OVRI**

This bit is set when a FIFO overrun is detected. It is cleared when the register is read.

**LINK[3:0]**

The LINK[3:0] field is used to specify the LIU octant data stream associated with the FIFO buffer in which the over-run was detected. LINK[3:0] should only be looked at when FIFO\_OVRI is a '1'. Valid values of LINK[3:0] are from 1 to 8.

This register will contain the interrupt status even if the corresponding interrupt enable is not set. Link 1 has the highest priority.



**Register 393H: EXSBI Parity Error Interrupt Reason**

Bit	Type	Function	Default
Bit 7	R	SPE[1]	0
Bit 6	R	SPE[0]	0
Bit 5	R	TRIB[4]	0
Bit 4	R	TRIB[3]	0
Bit 3	R	TRIB[2]	0
Bit 2	R	TRIB[1]	0
Bit 1	R	TRIB[0]	0
Bit 0	R	PERRI	0

**PERRI**

When set PERRI indicates that an SBI parity error has been detected. It is cleared when the register is read.

**TRIB[4:0] and SPE[1:0]**

The TRIB[4:0] and SPE[1:0] field are used to specify the SBI tributary for which a parity error was detected. These fields are only valid only when PERRI is set. When a parity error has not been detected the TRIB[4:0] field may contain an out of range tributary value.

If the type of the SPE where the parity error occurred does not correspond to the operating mode of the OCTLIU-SH (e.g. a parity error in a SPE containing E1s when the OCTLIU-SH is operating in T1 mode), SPE[1:0] will be valid but TRIB[4:0] will be invalid.

Values in these fields should only be looked at when PERRI is a '1'.

**Register 394H: EXSBI Depth Check Interrupt Status**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R	LINK[3]	0
Bit 3	R	LINK[2]	0
Bit 2	R	LINK[1]	0
Bit 1	R	LINK[0]	0
Bit 0	R	DCRI	0

**DCRI**

This bit is set when a Depth Check error is detected. It is cleared when the register is read.

**LINK[3:0]**

The LINK[3:0] field is used to specify the LIU octant data stream associated with the FIFO buffer in which the depth check error was detected. LINK[3:0] should only be looked at when DCRI is a '1'. Valid values for LINK[3:0] are from 1 to 8.

This register will contain the interrupt status even if the corresponding interrupt enable is not set. Link 1 has the highest priority.

**Register 395H: EXSBI Master Interrupt Status**

Bit	Type	Function	Default
Bit 7	R/W	Reserved	0
Bit 6		Unused	X
Bit 5	R	DCRI_SHDW	0
Bit 4	R	PERRI_SHDW	0
Bit 3	R	FIFO_UDRI_SHDW	0
Bit 2	R	FIFO_OVRI_SHDW	0
Bit 1		Unused	X
Bit 0	R	C1FP_SYNCI	0

**C1FP\_SYNCI**

This bit is set when a AC1FP realignment has been detected. Reading this register clears this interrupt source.

**FIFO\_OVRI\_SHDW**

This bit is a shadow of the FIFO\_OVRI bit in the EXSBI FIFO Overrun Interrupt Status Register. It is set when the FIFO\_OVRI bit is set and the interrupt enable FIFO\_OVRE is set. Reading this register has no affect on this interrupt source.

**FIFO\_UDRI\_SHDW**

This bit is a shadow of the FIFO\_UDRI bit in the EXSBI FIFO Underrun Interrupt Status Register. It is set when the FIFO\_UDRI bit is set and the interrupt enable FIFO\_UDRE is set. Reading this register has no affect on this interrupt source.

**PERRI\_SHDW**

This bit is a shadow of the PERRI bit in the EXSBI Parity Error Interrupt Reason Register. It is set when the PERRI bit is set and the interrupt enable SBI\_PERR\_EN is set. Reading this register has no affect on this interrupt source.

**DCRI\_SHDW**

This bit is a shadow of the DCRI bit in the EXSBI Depth Check Interrupt Status Register. It is set when the DCRI bit is set and the interrupt enable DCR\_INT\_EN is set. Reading this register has no affect on this interrupt source.

**RESERVED**

The reserved bit must be set to 0 for correct operation of the OCTLIU-SH device.

**Register 396H: EXSBI Minimum Depth**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3	R/W	MIN_DEP[3]	0
Bit 2	R/W	MIN_DEP[2]	1
Bit 1	R/W	MIN_DEP[1]	1
Bit 0	R/W	MIN_DEP[0]	1

**MIN\_DEP[3:0]**

The MIN\_DEPTH[3:0] bits specify the tributary FIFO Minimum Depth, i.e. the depth that must be reached before the FIFO reader starts to take data from the FIFO.

**Note:**

- The recommended value for MIN\_DEP[3:0] is "1001", which is not the default value following reset.

**Register 397H: EXSBI FIFO Thresholds**

Bit	Type	Function	Default
Bit 7	R/W	MIN_THR[3]	0
Bit 6	R/W	MIN_THR[2]	0
Bit 5	R/W	MIN_THR[1]	1
Bit 4	R/W	MIN_THR[0]	0
Bit 3	R/W	MAX_THR[3]	1
Bit 2	R/W	MAX_THR[2]	1
Bit 1	R/W	MAX_THR[1]	0
Bit 0	R/W	MAX_THR[0]	1

**MIN\_THR[3:0]**

The MIN\_THR[3:0] bits specify the tributary FIFO minimum threshold, i.e. the FIFO depth below which the serial data stream to the LIU octant is slowed down (when CLK\_MODE[1:0] = "00" in the EXSBI Tributary Control Register for the octant).

**MAX\_THR[3:0]**

The MAX\_THR[3:0] bits specify the tributary FIFO maximum threshold, i.e. the FIFO depth above which the serial data stream to the LIU octant is sped up (when CLK\_MODE[1:0] = "00" in the EXSBI Tributary Control Register for the octant).

**Register 398H: EXSBI Link Enable**

Bit	Type	Function	Default
Bit 7	R/W	LINK_ENBL[8]	0
Bit 6	R/W	LINK_ENBL[7]	0
Bit 5	R/W	LINK_ENBL[6]	0
Bit 4	R/W	LINK_ENBL[5]	0
Bit 3	R/W	LINK_ENBL[4]	0
Bit 2	R/W	LINK_ENBL[3]	0
Bit 1	R/W	LINK_ENBL[2]	0
Bit 0	R/W	LINK_ENBL[1]	0

**LINK\_ENBL[8:1]**

The LINK\_ENBL[8:1] bits enable the operation of the corresponding LIU octant data streams. When LINK\_ENBL is '1' for a stream, the EXSBI8 will take data from an SBI tributary and transmit that data to the LIU octant. The tributary to octant mapping is determined by the Octant to Tributary Mapping Registers and APAGE.

**Register 399H: EXSBI Link Enable Busy**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1		Unused	X
Bit 0	R	BUSY	0

**BUS:**

A write to the EXSBI Link Enable Register sets BUSY to '1'. BUSY is cleared to '0' approximately three REFCLK cycles later after the register contents have been synchronized to REFCLK.

The user must check that BUSY is '0' before writing to the EXSBI Link Enable Register.

Following a reset, BUSY will be '1' until startup circuitry has finished automatically initializing certain RAMs within EXSBI.

**Register 3A0H – 3A7H: EXSBI Tributary Control #1 – #8**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6	R/W	CLK_MODE[1]	0
Bit 5	R/W	CLK_MODE[0]	0
Bit 4	R/W	Reserved	0
Bit 3	R/W	Reserved	1
Bit 2	R/W	Reserved	0
Bit 1	R/W	Reserved	0
Bit 0		Unused	X

A tributary control register should only be written when the associated LINK\_ENBL bit is '0'.

**RESERVED:**

The reserved bits must be set to their default value for correct operation of the OCTLIU-SH device.

**CLK\_MODE[1:0]:**

The CLK\_MODE[1:0] field selects one of three different methods whereby the frequency of the serial data stream output to the LIU octant is determined, as shown in Table 6.

**Table 6 EXSBI Clock Generation Options**

CLK_MODE[1:0]	Description
00	Speed up and slow down the output serial clock depending on the FIFO fill level and the thresholds specified in the EXSBI Thresholds Register.
01	Speed up and slow down the output serial clock depending on the 'ClkRate' field of the tributary's Link Rate Octet on the SBI bus.
10	Speed up and slow down the output serial clock depending on the 'Phase' field of the tributary's Link Rate Octet on the SBI bus.
11	Reserved.



**Register 3A8H – 3AFH: EXSBI Page A Octant to Tributary Mapping #1 - #8**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6	R/W	SPE[1]	0
Bit 5	R/W	SPE[0]	0
Bit 4	R/W	TRIB[4]	0
Bit 3	R/W	TRIB[3]	0
Bit 2	R/W	TRIB[2]	0
Bit 1	R/W	TRIB[1]	0
Bit 0	R/W	TRIB[0]	0

**SPE[1:0] and TRIB[4:0]**

The SPE[1:0] and TRIB[4:0] fields are used to specify the LIU octant data stream to SBI tributary mapping when APAGE is set to 0. The input of the octant corresponding to the register (1-8) is sourced from the SPE and tributary specified by the value of SPE[1:0] and TRIB[4:0]. Valid values of SPE[1:0] are from 1 to 3. Valid values of TRIB[4:0] are from 1 to 28 in T1 mode and from 1 to 21 in E1 mode.

**Register 3B0H to 3B7H: EXSBI Page B Octant to Tributary Mapping #1 - #8**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6	R/W	SPE[1]	0
Bit 5	R/W	SPE[0]	0
Bit 4	R/W	TRIB[4]	0
Bit 3	R/W	TRIB[3]	0
Bit 2	R/W	TRIB[2]	0
Bit 1	R/W	TRIB[1]	0
Bit 0	R/W	TRIB[0]	0

**SPE[1:0] and TRIB[4:0]**

The SPE[1:0] and TRIB[4:0] fields are used to specify the LIU octant data stream to SBI tributary mapping when APAGE is set to 1. The input of the octant corresponding to the register (1-8) is sourced from the SPE and tributary specified by the value of SPE[1:0] and TRIB[4:0]. Valid values of SPE[1:0] are from 1 to 3. Valid values of TRIB[4:0] are from 1 to 28 in T1 mode and from 1 to 21 in E1 mode.

**Note:**

- The mapping of more than one tributary to the same LIU octant data stream or more than one LIU octant data stream to the same tributary is not allowed. Special care must be taken to ensure that all LIU octants and tributaries are uniquely mapped when using multiple OCTLIU-SH's on the same SBI bus. Failure to do so will result in bus contention.

**Register 043H, 0C3H, 143H, 1C3H, 243H, 2C3H, 343H, 3C3H:  
T1 PDVD Interrupt Enable/Status**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R	PDV	X
Bit 3	R	Z16DI	X
Bit 2	R	PDVI	X
Bit 1	R/W	Z16DE	0
Bit 0	R/W	PDVE	0

When the E1/T1B bit of the Global Configuration register is a logic 1, this register is held reset.

**PDV**

The PDV bit indicates the current state of the pulse density violation indication. When PDV is a logic 1, a violation of the pulse density rule exists. When PDV is a logic 0, no violation of the pulse density rule exists. Note: the PDV indication persists for the duration of the pulse density violation. At its minimum, PDV may be asserted for only 1 bit time, therefore, reading this bit may not return a logic 1 even though a pulse density violation has occurred.

**PDVI, Z16DI**

The PDVI and Z16DI bits identify the source of a generated interrupt. PDVI is a logic 1 whenever a change in the pulse density violation indication generated an interrupt. PDVI is cleared to 0 when this register is read. Z16DI is a logic 1 whenever 16 consecutive zeros are detected. Z16DI is cleared to 0 when this register is read. Note that the PDVI and Z16DI interrupt indications operate regardless of whether interrupts are enabled or disabled.

**Z16DE**

The Z16DE bit enables an interrupt to be generated on the microprocessor INTB pin when 16 consecutive zeros are detected. When Z16DE is set to logic 1, interrupt generation is enabled. When Z16DE is set to logic 0, interrupt generation is disabled.

**PDVE**

The PDVE bit enables an interrupt to be generated on the microprocessor INTB pin when a change in the pulse density is detected. When PDVE is set to logic 1, an interrupt is generated whenever a pulse density violation occurs or when the pulse density ceases to exist. When PDVE is set to logic 0, interrupt generation by pulse density violations is disabled.

**Register 045H, 0C5H, 145H, 1C5H, 245H, 2C5H, 345H, 3C5H:  
T1 XPDE Interrupt Enable/Status**

Bit	Type	Function	Default
Bit 7	R/W	STUFE	0
Bit 6	R/W	STUFF	0
Bit 5	R	STUFI	X
Bit 4	R	PDV	X
Bit 3	R	Z16DI	X
Bit 2	R	PDVI	X
Bit 1	R/W	Z16DE	0
Bit 0	R/W	PDVE	0

When the E1/T1B bit of the Global Configuration register is a logic 1, this register is held reset.

**STUFE**

The STUFE bit enables the occurrence of pulse stuffing to generate an interrupt on INTB. When STUFE is set to logic 1, an interrupt is generated on the occurrence of a bit stuff. When STUFE is a logic 0, bit stuffing occurrences do not generate an interrupt on INTB.

**STUFF**

The STUFF bit enables pulse stuffing to occur upon detection of a violation of the pulse density rule. Bit stuffing is performed in such a way that the resulting data stream no longer violates the pulse density rule. When STUFF is set to logic 1, bit stuffing is enabled and the STUFI bit indicates the occurrence of bit stuffs. When STUFF is a logic 0, bit stuffing is disabled and the PDVI bit indicates occurrences of pulse density violation. Also, when STUFF is a logic 0, PCM data passes through XPDE unaltered.

**STUFI**

The STUFI bit is valid when pulse stuffing is active. This bit indicates when a bit stuff occurred to eliminate a pulse density violation and that an interrupt was generated due to the bit stuff (if STUFE is logic 1). When pulse stuffing is active, PDVI remains logic 0, indicating that the stuffing has removed the density violation. The STUFI bit is reset to logic 0 once this register is read. If the STUFE bit is also logic 1, the interrupt is also cleared once this register is read.

## PDV

The PDV bit indicates the current state of the pulse density violation indication. When PDV is a logic 1, a violation of the pulse density rule exists. When PDV is a logic 0, no violation of the pulse density rule exists. Note: the PDV indication persists for the duration of the pulse density violation. At its minimum, PDV may be asserted for only 1 bit time, therefore, reading this bit may not return a logic 1 even though a pulse density violation has occurred. When the XPDE is enabled for pulse stuffing, PDV remains logic 0.

## PDVI, Z16DI

The PDVI and Z16DI bits identify the source of a generated interrupt. PDVI is a logic 1 whenever a change in the pulse density violation indication generated an interrupt. PDVI is cleared to 0 when this register is read. Z16DI is a logic 1 whenever 16 consecutive zeros are detected. Z16DI is cleared to 0 when this register is read. Note that the PDVI and Z16DI interrupt indications operate regardless of whether the corresponding interrupt enables are enabled or disabled. When STUFF is set to logic 1, the PDVI and Z16DI bits are forced to logic 0.

## Z16DE

The Z16DE bit enables an interrupt to be generated on the microprocessor INTB pin when 16 consecutive zeros are detected. When Z16DE is set to logic 1, interrupt generation is enabled. When Z16DE is set to logic 0, interrupt generation is disabled.

## PDVE

The PDVE bit enables an interrupt to be generated on the microprocessor INTB pin when a change in the pulse density is detected. When PDVE is set to logic 1, an interrupt is generated whenever a pulse density violation occurs or when the pulse density ceases to exist (if STUFE is logic 0). When PDVE is set to logic 0, interrupt generation by pulse density violations is disabled.

**Register 046H, 0C6H, 146H, 1C6H, 246H, 2C6H, 346H, 3C6H: T1 XIBC Control**

Bit	Type	Function	Default
Bit 7	R/W	EN	0
Bit 6	R/W	Reserved	0
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1	R/W	CL1	0
Bit 0	R/W	CL0	0

When the E1/T1B bit of the Global Configuration register is a logic 1, this register is held reset.

**EN**

The EN bit controls whether the Inband Code is transmitted or not. A logic 1 in the EN bit position enables transmission of inband codes; a logic 0 in the EN bit position disables inband code transmission.

**Note:**

- The PRBS transmit data (TX\_GEN=1) has priority over the XIBC data stream.

**RESERVED**

The reserved bit must be set to 0 for correct operation of the OCTLIU-SH device.

**CL1, CL0**

The bit positions CL1 and CL0 of this register indicate the length of the inband loopback code sequence, as follows:

**Table 7 Transmit In-band Code Length**

CL1	CL0	Code Length
0	0	5
0	1	6
1	0	7
1	1	8

Codes of 3 or 4 bits in length may be accommodated by treating them as half of a double-sized code (i.e., a 3-bit code would use the 6-bit code length setting).

**Register 047H, 0C7H, 147H, 1C7H, 247H, 2C7H, 347H, 3C7H: T1 XIBC Loopback Code**

Bit	Type	Function	Default
Bit 7	R/W	IBC7	X
Bit 6	R/W	IBC6	X
Bit 5	R/W	IBC5	X
Bit 4	R/W	IBC4	X
Bit 3	R/W	IBC3	X
Bit 2	R/W	IBC2	X
Bit 1	R/W	IBC1	X
Bit 0	R/W	IBC0	X

When the E1/T1B bit of the Global Configuration register is a logic 1, this register is held reset.

This register contains the inband loopback code pattern to be transmitted. The code is transmitted most significant bit (IBC7) first, followed by IBC6 and so on. The code, regardless of the length, must be aligned with the MSB always in the IBC7 position (e.g., a 5-bit code would occupy the IBC7 through IBC2 bit positions). To transmit a 3-bit or a 4-bit code pattern, the pattern must be paired to form a double-sized code (i.e., the 3-bit code '011' would be written as the 6-bit code '011011').

When the OCTLIU-SH is reset, the contents of this register are not affected.

**Register 048H, 0C8H, 148H, 1C8H, 248H, 2C8H, 348H, 3C8H: RJAT Interrupt Status**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1	R	OVRI	X
Bit 0	R	UNDI	X

**UNDI**

The UNDI bit is asserted when an attempt is made to read data from the receive FIFO when the FIFO is already empty. When UNDI is a logic 1, an underrun event has occurred. Reading this register will clear the UNDI bit to logic 0.

**OVRI**

The OVRI bit is asserted when an attempt is made to write data into the receive FIFO when the FIFO is already full. When OVRI is a logic 1, an overrun event has occurred. Reading this register will clear the OVRI bit to logic 0.



**Register 049H, 0C9H, 149H, 1C9H, 249H, 2C9H, 349H, 3C9H:  
RJAT Reference Clock Divisor (N1) Control**

Bit	Type	Function	Default
Bit 7	R/W	N1[7]	0
Bit 6	R/W	N1[6]	0
Bit 5	R/W	N1[5]	1
Bit 4	R/W	N1[4]	0
Bit 3	R/W	N1[3]	1
Bit 2	R/W	N1[2]	1
Bit 1	R/W	N1[1]	1
Bit 0	R/W	N1[0]	1

This register contains an 8-bit binary number, N1, which is one less than the magnitude of the reference clock divisor. The reference divisor magnitude, (N1+1), is the ratio between the frequency of the recovered clock (or the transmit clock if a diagnostic loopback is enabled) and the frequency at the phase discriminator input.

Writing to this register will reset the PLL.

The default value of N1 after a device reset is 47 = 2FH.

**Register 04AH, 0CAH, 14AH, 1CAH, 24AH, 2CAH, 34AH, 3CAH:  
RJAT Output Clock Divisor (N2) Control**

Bit	Type	Function	Default
Bit 7	R/W	N2[7]	0
Bit 6	R/W	N2[6]	0
Bit 5	R/W	N2[5]	1
Bit 4	R/W	N2[4]	0
Bit 3	R/W	N2[3]	1
Bit 2	R/W	N2[2]	1
Bit 1	R/W	N2[1]	1
Bit 0	R/W	N2[0]	1

This register contains an 8-bit binary number, N2, which is one less than the magnitude of the output clock divisor. The output clock divisor magnitude, (N2+1), is the ratio between the frequency of the smooth output clock, and the frequency applied to the phase discriminator input.

Writing to this register will reset the PLL.

The default value of N2 after a device reset is 47 = 2FH.

**Recommendations**

In general, the relationship  $N1 = N2$  must always be true in order for the PLL to operate correctly.

In order to meet jitter transfer specifications for some modes, such as basic E1 operation, N1 and N2 must be large in order to reduce the PLL transfer cutoff frequency. The recommended N1/N2 values for the various operating modes are shown in Table 8.

**Table 8 Recommended N1/N2 values**

Mode	N1	N2
T1 SBI (1.544 MHz)	FFH	FFH
E1 SBI (2.048 MHz)	FFH	FFH
T1 SBI (2.048 MHz)	FFH	FFH

**Note:**

- The frequencies quoted in parentheses refer to the XCLK frequency being used.

**Register 04BH, 0CBH, 14BH, 1CBH, 24BH, 2CBH, 34BH, 3CBH: RJAT Configuration**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R/W	CENT	0
Bit 3	R/W	UNDE	0
Bit 2	R/W	OVRE	0
Bit 1	R/W	FIFORST	0
Bit 0	R/W	LIMIT	1

**CENT**

Setting the CENT option to logic 1 will enable the FIFO self-centering option for the next 384 OCLK cycles, and for the first 384 OCLK cycles following an overrun or underrun event. If an EMPTY or FULL alarm occurs during this 384 UI period, then the period will be extended by the number of UI that the EMPTY or FULL alarm persists.

Setting both LIMIT and CENT to logic 1 will cause the FIFO to self-center only once (when CENT transitions from low to high) and then default to LIMIT functionality. The reason is that the FIFO must overrun or underrun in order for centering to trigger, but LIMIT prevents this from occurring.

The recommended value of CENT is logic 1.

**UNDE**

Setting the UNDE bit to logic 1 enables an underrun event to assert the INTB output low.

**OVRE**

Setting the OVRE bit to logic 1 enables an overrun event to assert the INTB output low.

**FIFORST**

Setting the FIFORST bit allows the FIFO to be reset. When FIFORST is logic 1, the FIFO will reset. When FIFORST is logic 0, the FIFO operates normally.

**LIMIT**

Setting the LIMIT bit to logic 1 will limit the PLL jitter attenuation by enabling the FIFO to increase or decrease the frequency of the smooth output clock whenever the FIFO is within one UI of overflowing or underflowing.

Setting both LIMIT and CENT to logic 1 will cause the FIFO to self-center only once (when CENT transitions from low to high) and then default to LIMIT functionality. The reason is that the FIFO must overrun or underrun in order for centering to trigger, but LIMIT prevents this from occurring.

The recommended value of LIMIT is logic 0.

**Register 04CH, 0CCH, 14CH, 1CCH, 24CH, 2CCH, 34CH, 3CCH: TJAT Interrupt Status**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1	R	OVRI	X
Bit 0	R	UNDI	X

**UNDI**

The UNDI bit is asserted when an attempt is made to read data from the transmit FIFO when the FIFO is already empty. When UNDI is a logic 1, an underrun event has occurred. Reading this register will clear the UNDI bit to logic 0.

**OVRI**

The OVRI bit is asserted when an attempt is made to write data into the transmit FIFO when the FIFO is already full. When OVRI is a logic 1, an overrun event has occurred. Reading this register will clear the OVRI bit to logic 0.

**Register 04DH, 0CDH, 14DH, 1CDH, 24DH, 2CDH, 34DH, 3CDH:  
TJAT Reference Clock Divisor (N1) Control**

Bit	Type	Function	Default
Bit 7	R/W	N1[7]	0
Bit 6	R/W	N1[6]	0
Bit 5	R/W	N1[5]	1
Bit 4	R/W	N1[4]	0
Bit 3	R/W	N1[3]	1
Bit 2	R/W	N1[2]	1
Bit 1	R/W	N1[1]	1
Bit 0	R/W	N1[0]	1

This register contains an 8-bit binary number, N1, which is one less than the magnitude of the reference clock divisor. The reference divisor magnitude, (N1+1), is the ratio between the frequency of the reference clock (as selected by the PLLREF1 and PLLREF0 bits of the Transmit Line Interface Timing Options register) and the frequency at the phase discriminator input.

Writing to this register will reset the PLL.

The default value of N1 after a device reset is  $47 = 2FH$ .

**Register 04EH, 0CEH, 14EH, 1CEH, 24EH, 2CEH, 34EH, 3CEH:  
TJAT Output Clock Divisor (N2) Control**

Bit	Type	Function	Default
Bit 7	R/W	N2[7]	0
Bit 6	R/W	N2[6]	0
Bit 5	R/W	N2[5]	1
Bit 4	R/W	N2[4]	0
Bit 3	R/W	N2[3]	1
Bit 2	R/W	N2[2]	1
Bit 1	R/W	N2[1]	1
Bit 0	R/W	N2[0]	1

This register contains an 8-bit binary number, N2, which is one less than the magnitude of the output clock divisor. The output clock divisor magnitude, (N2+1), is the ratio between the frequency of the smooth output clock and the frequency applied to the phase discriminator input.

Writing to this register will reset the PLL.

The default value of N2 after a device reset is 47 = 2FH.

**Recommendations**

In general, the relationship  $N1 = N2$  must always be true in order for the PLL to operate correctly.

In order to meet jitter transfer specifications for some modes, such as basic E1 operation, N1 and N2 must be large in order to reduce the PLL transfer cutoff frequency. The recommended N1/N2 values for the various operating modes are shown in Table 9.

**Table 9 Recommended N1/N2 values**

Mode	N1	N2
T1 SBI (1.544 MHz)	FFH	FFH
E1 SBI (2.048 MHz)	FFH	FFH
T1 SBI (2.048 MHz)	FFH	FFH

**Note:**

- The frequencies quoted in parentheses refer to the XCLK frequency being used.

**Register 04FH, 0CFH, 14FH, 1CFH, 24FH, 2CFH, 34FH, 3CFH: TJAT Configuration**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R/W	CENT	0
Bit 3	R/W	UNDE	0
Bit 2	R/W	OVRE	0
Bit 1	R/W	FIFORST	0
Bit 0	R/W	LIMIT	1

**CENT**

Setting the CENT option to logic 1 will enable the FIFO self-centering option for the next 384 OCLK cycles, and for the first 384 OCLK cycles following an overrun or underrun event. If an EMPTY or FULL alarm occurs during this 384 UI period, then the period will be extended by the number of UI that the EMPTY or FULL alarm persists.

Setting both LIMIT and CENT to logic 1 will cause the FIFO to self-center only once (when CENT transitions from low to high) and then default to LIMIT functionality. The reason is that the FIFO must overrun or underrun in order for centering to trigger, but LIMIT prevents this from occurring.

The recommended value of CENT is logic 1.

**UNDE**

Setting the UNDE bit to logic 1 enables an underrun event to assert the INTB output low.

**OVRE**

Setting the OVRE bit to logic 1 enables an overrun event to assert the INTB output low.

**FIFORST**

Setting the FIFORST bit allows the FIFO to be reset. When FIFORST is logic 1, the FIFO will reset. When FIFORST is logic 0, the FIFO operates normally.

**LIMIT**

Setting the LIMIT bit to logic 1 will limit the PLL jitter attenuation by enabling the FIFO to increase or decrease the frequency of the smooth output clock whenever the FIFO is within one UI of overflowing or underflowing.



Setting both LIMIT and CENT to logic 1 will cause the FIFO to self-center only once (when CENT transitions from low to high) and then default to LIMIT functionality. The reason is that the FIFO must overrun or underrun in order for centering to trigger, but LIMIT prevents this from occurring.

The recommended value of LIMIT is logic 0.

**Register 050H, 0D0H, 150H, 1D0H, 250H, 2D0H, 350H, 3D0H: IBCD Configuration**

Bit	Type	Function	Default
Bit 7	R/W	Reserved	0
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3	R/W	DSEL1	0
Bit 2	R/W	DSEL0	0
Bit 1	R/W	ASEL1	0
Bit 0	R/W	ASEL0	0

When the E1/T1B bit of the Global Configuration register is a logic 1, this register is held reset.

This register provides the selection of the Activate and De-activate loopback code lengths (from 3 bits to 8 bits) as follows:

**Table 10 Loopback Code Configurations**

DEACTIVATE Code		ACTIVATE Code		CODE LENGTH
DSEL1	DSEL0	ASEL1	ASEL0	
0	0	0	0	5 bits
0	1	0	1	6 (or 3*) bits
1	0	1	0	7 bits
1	1	1	1	8 (or 4*) bits

**Note:**

- 3-bit and 4-bit code sequences can be accommodated by configuring the IBCD for 6 or 8 bits and by programming two repetitions of the code sequence.
- The Reserved bit is used for production test purposes only. The Reserved bit must be logic 0 for normal operation.

**Register 051H, 0D1H, 151H, 1D1H, 251H, 2D1H, 351H, 3D1H: IBCD Interrupt Enable/Status**

Bit	Type	Function	Default
Bit 7	R	LBACP	X
Bit 6	R	LBDCP	X
Bit 5	R/W	LBAE	0
Bit 4	R/W	LBDE	0
Bit 3	R	LBAI	X
Bit 2	R	LBDI	X
Bit 1	R	LBA	X
Bit 0	R	LBD	X

When the E1/T1B bit of the Global Configuration register is a logic 1, this register is held reset.

**LBACP, LBDCP**

The LBACP and LBDCP bits indicate when the corresponding loopback code is present during a 39.8 ms interval.

**LBAE**

The LBAE bit enables the assertion or deassertion of the inband Loopback Activate (LBA) detect indication to generate an interrupt on the microprocessor INTB pin. When LBAE is set to logic 1, any change in the state of the LBA detect indication generates an interrupt. When LBAE is set to logic 0, no interrupt is generated by changes in the LBA detect state.

**LBDE**

The LBDE bit enables the assertion or deassertion of the inband Loopback Deactivate (LBD) detect indication to generate an interrupt on the microprocessor INTB pin. When LBDE is set to logic 1, any change in the state of the LBD detect indication generates an interrupt. When LBDE is set to logic 0, no interrupt is generated by changes in the LBD detect state.

**LBAI, LBDI**

The LBAI and LBDI bits indicate which of the two expected loopback codes generated the interrupt when their state changed. A logic 1 in these bit positions indicates that a state change in that code has generated an interrupt; a logic 0 in these bit positions indicates that no state change has occurred. After the Enable/Status Register has been read, the LBAI and LBDI bits are set to logic 0.

## LBA, LBD

The LBA and LBD bits indicate the current state of the corresponding loopback code detect indication. A logic 1 in these bit positions indicates the presence of that code has been detected; a logic 0 in these bit positions indicates the absence of that code. Each INBAND LOOPBACK code sequence is defined as the repetition of the programmed code in the PCM stream for at least 5.1 seconds. The detection algorithm tolerates more than the minimum number of discrepancy bits in order to detect framed PCM data in the presence of a  $10^{-2}$  bit error rate.

**Register 052H, 0D2H, 152H, 1D2H, 252H, 2D2H, 352H, 3D2H: IBCD Activate Code**

Bit	Type	Function	Default
Bit 7	R/W	ACT7	0
Bit 6	R/W	ACT6	0
Bit 5	R/W	ACT5	0
Bit 4	R/W	ACT4	0
Bit 3	R/W	ACT3	0
Bit 2	R/W	ACT2	0
Bit 1	R/W	ACT1	0
Bit 0	R/W	ACT0	0

When the E1/T1B bit of the Global Configuration register is a logic 1, this register is held reset.

This 8-bit register selects the Activate code sequence that is to be detected. If the code sequence length is less than 8 bits, the first 8 bits of several repetitions of the code sequence must be used to fill the 8-bit register. For example, if code sequence is a repeating 00001, the first 8 bits of two repetitions (0000100001) is programmed into the register, i.e.00001000. Note that bit ACT7 corresponds to the first code bit received.

**Register 053H, 0D3H, 153H, 1D3H, 253H, 2D3H, 353H, 3D3H: IBCD Deactivate Code**

Bit	Type	Function	Default
Bit 7	R/W	DACT7	0
Bit 6	R/W	DACT6	0
Bit 5	R/W	DACT5	0
Bit 4	R/W	DACT4	0
Bit 3	R/W	DACT3	0
Bit 2	R/W	DACT2	0
Bit 1	R/W	DACT1	0
Bit 0	R/W	DACT0	0

When the E1/T1B bit of the Global Configuration register is a logic 1, this register is held reset.

This 8-bit register selects the Deactivate code sequence that is to be detected. If the code sequence length is less than 8 bits, the first 8 bits of several repetitions of the code sequence must be used to fill the 8-bit register. For example, if code sequence is a repeating 001, the first 8 bits of three repetitions (001001001) is programmed into the register, i.e.00100100. Note that bit DACT7 corresponds to the first code bit received.

**Register 054H, 0D4H, 154H, 1D4H, 254H, 2D4H, 354H, 3D4H: CDRC Configuration**

Bit	Type	Function	Default
Bit 7	R/W	AMI	0
Bit 6	R/W	LOS[1]	0
Bit 5	R/W	LOS[0]	0
Bit 4	R/W	Reserved	0
Bit 3	R/W	Reserved	0
Bit 2	R/W	Reserved	0
Bit 1	R/W	O162	0
Bit 0	R/W	Reserved	0

**RESERVED**

Reserved bit 2 must be set to logic 1 for correct operation. All other reserved bits must be a logic 0 for correct operation.

**O162**

If the AMI bit is logic 0 in E1 mode, the Recommendation O.162 compatibility select bit (O162) allows selection between two line code violation definitions:

If O162 is a logic 0, a line code violation is indicated if the serial stream does not match the verbatim HDB3 definition given in Recommendation G.703. A bipolar violation that is not part of an HDB3 signature or a bipolar violation in an HDB3 signature that is the same polarity as the last bipolar violation results in a line code violation indication.

If O162 is a logic 1, a line code violation is indicated if a bipolar violation is of the same polarity as the last bipolar violation, as per Recommendation O.162.

The O162 bit has no effect in T1 mode.

**AMI**

The alternate mark inversion (AMI) bit specifies the line coding of the incoming signal. A logic 1 selects AMI line coding by disabling HDB3 decoding in E1 mode and B8ZS in T1 mode. In E1 mode, a logic 0 selects HDB3 line decoding which entails substituting an HDB3 signature with four zeros. In T1 mode, a logic 0 selects B8ZS line decoding which entails substituting an B8ZS signature with eight zeros.

**LOS[1:0]**

The loss of signal threshold is set by the operating mode and the state of the AMI, LOS[1] and LOS[0] bits:

**Table 11 Loss of Signal Thresholds**

Mode	AMI	LOS[1]	LOS[0]	Threshold (PCM periods)
E1	0	0	0	10
T1	0	0	0	15
X	1	0	0	15
X	X	0	1	31
X	X	1	0	63
X	X	1	1	175

When the number of consecutive zeros on the incoming PCM line exceeds the programmed threshold, the LOSV status bit is set. For example, if the threshold is set to 10, the 11th zero causes the LOSV bit to be set.



**Register 055H, 0D5H, 155H, 1D5H, 255H, 2D5H, 355H, 3D5H: CDRC Interrupt Control**

Bit	Type	Function	Default
Bit 7	R/W	LCVE	0
Bit 6	R/W	LOSE	0
Bit 5	R/W	LCSDE	0
Bit 4	R/W	ZNDE	0
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1		Unused	X
Bit 0		Unused	X

The bit positions LCVE, LOSE, LCSDE and ZNDE (bits 7 to 4) of this register are interrupt enables to select which of the status events (Line Code Violation , Loss Of Signal, HDB3 signature, B8ZS signature or N Zeros), either singly or in combination, are enabled to generate an interrupt on the microprocessor INTB pin when they are detected. A logic 1 bit in the corresponding bit position enables the detection of these signals to generate an interrupt; a logic 0 bit in the corresponding bit position disables that signal from generating an interrupt.

**Register 056H, 0D6H, 156H, 1D6H, 256H, 2D6H, 356H, 3D6H: CDRC Interrupt Status**

Bit	Type	Function	Default
Bit 7	R	LCVI	X
Bit 6	R	LOSI	X
Bit 5	R	LCSDI	X
Bit 4	R	ZNDI	X
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1		Unused	X
Bit 0	R	LOSV	X

The ZNDI, LCSDI, LOSI and LCVI (bits 4 to 7) of this register indicate which of the status events have occurred since the last time this register was read. A logic 1 in any of these bit positions indicates that the corresponding event was detected.

Bits ZNDI, LCSDI, LOSI and LCVI are cleared to logic 0 by reading this register.

**LOSV**

The LOSV bit reflects the status of the LOS alarm.

**ZNDI**

The consecutive zeros detection interrupt (ZNDI) indicates that N consecutive spaces have occurred, where N is four for E1 and eight for T1. This bit can be used to detect an AMI coded signal.

**LCSDI**

The line code signature detection interrupt (LCSDI) indicates that a valid line code signature has occurred. In T1 mode, the B8ZS signature is defined as 000+-0-+ if the previous impulse is positive, or 000-+0+- if it is negative. In E1 mode, a valid HDB3 signature is defined as a bipolar violation preceded by two zeros. This bit can be used to detect an HDB3 coded signal in E1 mode and B8ZS coded signal in T1.

**LOSI**

The LOSI bit is set to a logic 1 when the LOSV bit changes state.

**LCVI**

The line code violation interrupt (LCVI) indicates a series of marks and spaces has occurred in contradiction to the defined line code (AMI, B8ZS or HDB3).

**Register 057H, 0D7H, 157H, 1D7H, 257H, 2D7H, 357H, 3D7H:  
CDRC Alternate Loss of Signal Status**

Bit	Type	Function	Default
Bit 7	R/W	ALTLOSE	0
Bit 6	R	ALTLOSI	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1		Unused	X
Bit 0	R	ALTLOSV	X

The alternate loss of signal status provides a more stringent criteria for the deassertion of the alarm than the LOS indication in the CDRC Interrupt Status register.

**ALTLOSE**

If the ALTLOSE bit is a logic 1, the INTB output is asserted low when the ALTLOSV status bit changes state.

**ALTLOSI**

The ALTLOSI bit is set high when the ALTLOSV status bit changes state. It is cleared when this register is read.

**ALTLOSV**

The ALTLOSV bit is asserted upon the absence of marks for the threshold of bit periods specified by the LOS[1:0] register bits. The ALTLOSV bit is deasserted only after pulse density requirements have been met. In T1 mode, there must be N ones in each and every time window of 8(N+1) data bits (where N can equal 1 through 23). In E1 mode, ALTLOSV is deasserted only after 255 bit periods during which no sequence of four zeros has been received.

**Register 058H, 0D8H, 158H, 1D8H, 258H, 2D8H, 358H, 3D8H: PMON Interrupt Enable/Status**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2	R/W	INTE	0
Bit 1	R	XFER	0
Bit 0		Unused	X

This register contains status information indicating when counter data has been transferred into the holding registers and indicating whether the holding registers have been overrun.

**INTE**

The INTE bit controls the generation of a microprocessor interrupt when the transfer clock has caused the counter values to be stored in the holding registers. A logic 1 bit in the INTE position enables the generation of an interrupt via the INTB output; a logic 0 bit in the INTE position disables the generation of an interrupt.

**XFER**

The XFER bit indicates that a transfer of counter data has occurred. A logic 1 in this bit position indicates that a latch request, initiated by writing to one of the counter register locations or the Octant PMON Update register, was received and a transfer of the counter values has occurred. A logic 0 indicates that no transfer has occurred. The XFER bit is cleared (acknowledged) by reading this register.

**Register 05EH, 0DEH, 15EH, 1DEH, 25EH, 2DEH, 35EH, 3DEH: PMON LCV Count (LSB)**

Bit	Type	Function	Default
Bit 7	R	LCV[7]	X
Bit 6	R	LCV[6]	X
Bit 5	R	LCV[5]	X
Bit 4	R	LCV[4]	X
Bit 3	R	LCV[3]	X
Bit 2	R	LCV[2]	X
Bit 1	R	LCV[1]	X
Bit 0	R	LCV[0]	X

**Register 05FH, 0DFH, 15FH, 1DFH, 25FH, 2DFH, 35FH, 3DFH: PMON LCV Count (MSB)**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R	LCV[12]	X
Bit 3	R	LCV[11]	X
Bit 2	R	LCV[10]	X
Bit 1	R	LCV[9]	X
Bit 0	R	LCV[8]	X

**LCV[12:0]**

The LCV[12:0] bits indicate the number of LCV error events that occurred during the previous accumulation interval. An LCV event is defined as the occurrence of a Bipolar Violation or Excessive Zeros. The counting of Excessive Zeros can be disabled by the BPV bit of the Receive Line Interface Configuration #1 register.

The LCV count registers for an octant are updated by writing to the PMON LCV Count (LSB) register. A write to this location loads count data located in the PMON into the internal holding registers. Alternatively, the LCV count registers for the octant are updated by writing to the Line Interface Interrupt Source #1 / PMON Update register. The data contained in the holding registers can then be subsequently read by microprocessor accesses into the PMON count register address space. The latching of count data, and subsequent resetting of the counters, is synchronized to the internal event timing so that no events are missed.

The PMON is loaded with new count data within 3.5 recovered clock periods of the triggering register write. With nominal line rates, the PMON registers should not be polled until 2.3  $\mu$ sec have elapsed from the triggering register write.

When the OCTLIU-SH is reset, the contents of the PMON count registers are unknown until the first latching of performance data is performed.

**Register 060H, 0E0H, 160H, 1E0H, 260H, 2E0H, 360H, 3E0H:  
PRBS Generator/Checker Control**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5	R/W	QRSS	0
Bit 4		Unused	X
Bit 3	R/W	TINV	0
Bit 2	R/W	RINV	0
Bit 1	R/W	AUTOSYNC	1
Bit 0	R/W	MANSYNC	0

**QRSS**

The quasi-random signal source (QRSS) bit enables the zero suppression feature required when generating a QRSS sequence. When QRSS is a logic 1, a one is forced in the generated PRBS stream when the following 14 bit positions are all zeros. When QRSS is a logic 0, the zero suppression feature is disabled.

In order to generate the AT&T TR 62411 QRSS sequence, or the  $2^{20}-1$  sequence as specified in ITU-T O.151, the PATSEL[1:0] field in the PRBS Pattern Select Register must be set to "01" and QRSS set to 1.

**TINV**

The TINV bit controls the logical inversion of the generated data stream. When TINV is a logic 1, the data is inverted. When TINV is a logic 0, the data is not inverted.

**RINV**

The RINV bit controls the logical inversion of the received stream before processing. When RINV is a logic 1, the received data is inverted before being processed by the pattern detector. When RINV is a logic 0, the data is not inverted.

**AUTOSYNC**

The AUTOSYNC bit enables the automatic resynchronization of the pattern detector. The automatic resynchronization is activated when 10 or more bit errors are detected in a fixed 48-bit window. When AUTOSYNC is a logic 1, the auto resync feature is enabled. When AUTOSYNC is a logic 0, the auto sync feature is disabled, and pattern resynchronization is accomplished using the MANSYNC bit.

## MANSYNC

The MANSYNC bit is used to initiate a manual resynchronization of the pattern detector. A low to high transition on MANSYNC initiates the resynchronization.



**Register 061H, 0E1H, 161H, 1E1H, 261H, 2E1H, 361H, 3E1H:  
PRBS Checker Interrupt Enable/Status**

Bit	Type	Function	Default
Bit 7	R/W	SYNCE	0
Bit 6	R/W	BEE	0
Bit 5	R/W	XFERE	0
Bit 4	R	SYNCV	X
Bit 3	R	SYNCI	X
Bit 2	R	BEI	X
Bit 1	R	XFERI	X
Bit 0		Unused	X

**SYNCE**

The SYNCE bit enables the generation of an interrupt when the PRBS checker changes synchronization state. When SYNCE is set to logic 1, the interrupt is enabled.

**BEE**

The BEE bit enables the generation of an interrupt when a bit error is detected in the receive data. **Bit errors are not flagged unless the pattern detector is synchronized.** When BEE is set to logic 1, the interrupt is enabled.

**XFERE**

The XFERE bit enables the generation of an interrupt when an accumulation interval is completed and new values are stored in the error counter holding registers. When XFERE is set to logic 1, the interrupt is enabled.

**SYNCV**

The SYNCV bit indicates the synchronization state of the PRBS checker. When SYNCV is a logic 1 the PRBS checker is synchronized (the PRBS checker has observed at least 32 consecutive error free bit periods). When SYNCV is a logic 0, the PRBS checker is out of sync (the PRBS checker has detected 6 or more bit errors in a 64 bit period window).

**SYNCI**

The SYNCI bit indicates that the detector has changed synchronization state since the last time this register was read. If SYNCI is logic 1, the pattern detector has gained or lost synchronization at least once. SYNCI is set to logic 0 when this register is read.

#### BEI

The BEI bit indicates that one or more bit errors have been detected since the last time this register was read. When BEI is set to logic 1, at least one bit error has been detected. BEI is set to logic 0 when this register is read.

#### XFERI

The XFERI bit indicates that a transfer of the error count has occurred. A logic 1 in this bit position indicates that the error counter holding registers has been updated. This update is initiated by writing to one of the PRBS Error Count register locations, or by writing to the Line Interface Interrupt Source #1 / PMON Update register. XFERI is set to logic 0 when this register is read.

**Register 062H, 0E2H, 162H, 1E2H, 262H, 2E2H, 362H, 3E2H: PRBS Pattern Select**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1	R/W	PATSEL[1]	0
Bit 0	R/W	PATSEL[0]	0

**PATSEL[1:0]**

PATSEL[1:0] determines which of the three PRBS patterns are generated and checked for errors.

PATSEL[1:0]	Pattern
00	$2^{15}-1$
01	$2^{20}-1$
10	$2^{11}-1$
11	Reserved

**Register 064H, 0E4H, 164H, 1E4H, 264H, 2E4H, 364H, 3E4H: PRBS Error Count #1**

Bit	Type	Function	Default
Bit 7	R	ERRCNT[7]	X
Bit 6	R	ERRCNT[6]	X
Bit 5	R	ERRCNT[5]	X
Bit 4	R	ERRCNT[4]	X
Bit 3	R	ERRCNT[3]	X
Bit 2	R	ERRCNT[2]	X
Bit 1	R	ERRCNT[1]	X
Bit 0	R	ERRCNT[0]	X

Register 065H, 0E5H, 165H, 1E5H, 265H, 2E5H, 365H, 3E5H: PRBS Error Count #2

Bit	Type	Function	Default
Bit 7	R	ERRCNT[15]	X
Bit 6	R	ERRCNT[14]	X
Bit 5	R	ERRCNT[13]	X
Bit 4	R	ERRCNT[12]	X
Bit 3	R	ERRCNT[11]	X
Bit 2	R	ERRCNT[10]	X
Bit 1	R	ERRCNT[9]	X
Bit 0	R	ERRCNT[8]	X

**Register 066H, 0E6H, 166H, 1E6H, 266H, 2E6H, 366H, 3E6H: PRBS Error Count #3**

Bit	Type	Function	Default
Bit 7	R	ERRCNT[23]	X
Bit 6	R	ERRCNT[22]	X
Bit 5	R	ERRCNT[21]	X
Bit 4	R	ERRCNT[20]	X
Bit 3	R	ERRCNT[19]	X
Bit 2	R	ERRCNT[18]	X
Bit 1	R	ERRCNT[17]	X
Bit 0	R	ERRCNT[16]	X

**ERRCNT[23:0]**

ERRCNT[23:0] contain the error counter holding register. The value in this register represents the number of bit errors that have been accumulated since the last accumulation interval, up to a maximum (saturation) value of  $2^{24}-1$ . Note that bit errors are not accumulated while the pattern detector is out of sync.

The Error Count registers for each individual PRBS generator/checker are updated by writing to any one of the Error count registers. Alternatively, the Error Count registers are updated with all other octant counter registers by writing to the Line Interface Interrupt Source #1 / PMON Update register. The data contained in the holding registers can then be subsequently read by microprocessor accesses into the PRBS error count register address space. The latching of error count data, and subsequent resetting of the counters, is synchronized to the internal event timing so that no events are missed.

The PRBS is loaded with new count data within 6 recovered clock periods of the triggering register write. In T1 mode, the PRBS registers should not be read until 4  $\mu$ sec have elapsed from the triggering register write. In E1 mode, the PRBS registers should not be read until 3  $\mu$ sec have elapsed from the triggering register write. The XFERI bit the PRBS Checker Interrupt Enable/Status Register may be polled to determine whether the required interval has elapsed.

**Register 068H, 0E8H, 168H, 1E8H, 268H, 2E8H, 368H, 3E8H: XLPG Control/Status**

Bit	Type	Function	Default
Bit 7	R/W	HIGHZ	1
Bit 6	R/W	ARST	0
Bit 5		Unused	X
Bit 4	R/W	Reserved	0
Bit 3	R	Reserved	X
Bit 2	R/W	Reserved	0
Bit 1	R/W	Reserved	0
Bit 0	R/W	Reserved	1

**HIGHZ**

The HIGHZ bit controls tristating of the TXTIP[x] and TXRING[x] outputs. When the HIGHZ bit is set to a logic 0, the outputs are enabled. When the HIGHZ bit is set to a logic 1, the outputs are put into high impedance. Setting HIGHZ to logic 1 has the same effect as setting SCALE[4:0] to 00H.

**ARST**

The Analogue Reset bit (ARST) resets the analogue portion of the XLPG (without affecting the digital portion) when set to logic 1.

**RESERVED**

The Reserved bits must remain in their default state for correct operation.

**Register 069H, 0E9H, 169H, 1E9H, 269H, 2E9H, 369H, 3E9H: XLPG Pulse Waveform Scale**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4	R/W	SCALE[4]	0
Bit 3	R/W	SCALE[3]	0
Bit 2	R/W	SCALE[2]	0
Bit 1	R/W	SCALE[1]	0
Bit 0	R/W	SCALE[0]	0

**SCALE[4:0]**

The SCALE[4:0] bits specify a scaling factor to be applied to the amplitude of the D/A output waveform. Each of the 12 waveforms stored in the XLPG's pulse template RAM may have a different scaling factor. When a particular waveform is selected for use (by the PT\_SEL[3:0] register bits or LENx[2:0] inputs), the scaling factor corresponding to that waveform is chosen automatically.

When this register is written to, the value of SCALE[4:0] is stored in one of 12 storage locations indexed by the WAVEFORM[3:0] bits of the Pulse Waveform Storage Write Address #2 register. Thus to set up scaling factors for more than one waveform, this register should be written to a number of times, with WAVEFORM[3:0] set to the different waveform numbers, as appropriate.

The SCALE[4:0] bits scale the maximum output amplitude by increments of 11.14 mA. A value of 0 (00H) tristates the output while the maximum value of 21 (15H) sets the full scale current to 234 mA.

**Table 12 Transmit Output Amplitude**

SCALE[4:0]	Decimal Equiv.	Output Amplitude
00000	0	0 mA (tristate)
00001-10100	1-20	Increments of 11.14 mA for each scale step
10101	21	234 mA total
10110-11111	>21	Reserved



**Register 06AH, 0EAH, 16AH, 1EAH, 26AH, 2EAH, 36AH, 3EAH:  
XLPG Pulse Waveform Storage Write Address #1**

Bit	Type	Function	Default
Bit 7	R/W	SAMPLE[4]	0
Bit 6	R/W	SAMPLE[3]	0
Bit 5	R/W	SAMPLE[2]	0
Bit 4	R/W	SAMPLE[1]	0
Bit 3	R/W	SAMPLE[0]	0
Bit 2	R/W	UI[2]	0
Bit 1	R/W	UI[1]	0
Bit 0	R/W	UI[0]	0

UI[2:0]

The pulse waveform write address is composed of a unit interval selector, a sample selector and a waveform number. The unit interval selector (UI[2:0]) specifies the unit interval portion of the address. There are 5 unit intervals, numbered from 0 to 4. UI[2:0] can take the values 0H, 1H, 2H, 3H and 4H. The values 5H, 6H and 7H are undefined.

SAMPLE[4:0]

The pulse waveform write address is composed of a unit interval selector, a sample selector and a waveform number. The sample selector (SAMPLE[4:0]) specifies the sample portion of the address. There are 24 samples, numbered from 0 to 23. SAMPLE[4:0] can thus have any value from 00H to 17H. The values from 18H to 1FH are undefined.

**Note:**

- The Pulse Waveform Storage Write Indirect Address Registers #1 and #2 must be written to *before* the Pulse Waveform Storage Data register. In addition, waveform samples must be written in groups of 5. Within each group of 5 writes, the waveform number and sample selector must remain constant and the unit interval selector must be set to 0x0, 0x1, 0x2, 0x3 and 0x4 in sequence. See the Operation section for more details on setting up waveform templates.

**Register 06BH, 0EBH, 16BH, 1EBH, 26BH, 2EBH, 36BH, 3EBH:  
XLPG Pulse Waveform Storage Write Address #2**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3	R/W	WAVEFORM[3]	0
Bit 2	R/W	WAVEFORM[2]	0
Bit 1	R/W	WAVEFORM[1]	0
Bit 0	R/W	WAVEFORM[0]	0

**WAVEFORM[3:0]**

The pulse waveform write address is composed of a unit interval selector, a sample selector and a waveform number. The waveform number (WAVEFORM[3:0]) specifies the waveform portion of the address. There are 12 waveforms, numbered from 0 to 11. WAVEFORM[3:0] can thus have any value from 0H to BH. The values from CH to FH are undefined.

**Note:**

- The Pulse Waveform Storage Write Indirect Address Registers #1 and #2 must be written to *before* the Pulse Waveform Storage Data register. In addition, waveform samples must be written in groups of 5. Within each group of 5 writes, the waveform number and sample selector must remain constant and the unit interval selector must be set to 0x0, 0x1, 0x2, 0x3 and 0x4 in sequence. See the Operation section for more details on setting up waveform templates.

**Register 06CH, 0ECH, 16CH, 1ECH, 26CH, 2ECH, 36CH, 3ECH:  
XLPG Pulse Waveform Storage Data**

Bit	Type	Function	Default
Bit 7		Unused	X
Bit 6	W	WDAT[6]	X
Bit 5	W	WDAT[5]	X
Bit 4	W	WDAT[4]	X
Bit 3	W	WDAT[3]	X
Bit 2	W	WDAT[2]	X
Bit 1	W	WDAT[1]	X
Bit 0	W	WDAT[0]	X

**WDAT[6:0]**

The WDAT[6:0] bits contain the write data to be stored in the pulse template RAM, as addressed by the UI[2:0], SAMPLE[4:0] and WAVEFORM[3:0] bits in the Pulse Waveform Storage Write Address registers. When writing to the RAM, the address must first be written to the Pulse Waveform Storage Write Address registers. Writing to the Pulse Waveform Storage Data register triggers the transfer of data. If the UI portion of the address is 0, 1, 2 or 3, WDAT[6:0] are transferred to internal holding registers. If the UI portion of the address is 4, WDAT[6:0] are combined with the contents of the holding registers to form a 35-bit long word which is then stored in the pulse template RAM. Waveform samples must therefore be written in groups of 5 and within each group of 5 writes, the waveform number and sample selector must remain constant and the unit interval selector must be set to 0x0, 0x1, 0x2, 0x3 and 0x4 in sequence.

WDAT[6:0] are coded in signed magnitude representation. WDAT[6] is the sign bit, WDAT[5] is the most significant data bit and WDAT[0] is the least significant data bit. The data values thus can range from -63 to +63.

See the Operation section for more details on setting up custom waveform templates.

**Register 06DH, 0EDH, 16DH, 1EDH, 26DH, 2EDH, 36DH, 3EDH: XLPG Fuse Control**

Bit	Type	Function	Default
Bit 7	R/W	Reserved	0
Bit 6	R/W	FSTR	0
Bit 5	R/W	Reserved	1
Bit 4	R/W	FSEL	0
Bit 3	R/W	Reserved	0
Bit 2	R/W	Reserved	0
Bit 1	R/W	Reserved	0
Bit 0	R/W	Reserved	0

**FSEL**

The Fuse Bank Selector (FSEL) bit determines which half of the fuse bus is to be accessed. When FSEL is logic 0, bits [3:0] of the fuse bus are selected. When FSEL is logic 1, bits [7:4] of the fuse bus are selected.

**FSTR**

Fuse latch enable. When FSTR = '1', the latches which drive either the upper or lower 4 bits of the fuse bus (depending on FSEL) are updated with their input data as defined by the fuse values. When FSTR = '0', the latches retain their previously stored values.

**RESERVED**

These bits must be set their default for correct operation.

**Note:**

1. The four MSB's of the poly-silicon fuse's state will be loaded each time the OCTLIU-SH is powered up or reset. The four LSB poly-silicon fuses are loaded under software control. The following sequence must be used to load the four LSB fuse registers, each time the OCTLIU-SH is powered up or reset;

- Step 1: Write "00000000" to the XLPG Fuse Control register. This presents the actual fuse values (LSB only) to the fuse register.
- Step 2: Write "01000000" to load the fuse values into register.
- Step 3: Write "00000000" to latch the register values.
- Step 4: Write "00100000" to power down the poly-silicon fuse analogue circuitry.

These steps can be performed in broadcast mode (SIMUL\_REGWR=1, in the Global Configuration/Clock Monitor register 0x001), so they need not be repeated per channel.

**Register 070H, 0F0H, 170H, 1F0H, 270H, 2F0H, 370H, 3F0H: RLPS Configuration and Status**

Bit	Type	Function	Default
Bit 7	R	ALOSI	X
Bit 6	R	ALOSV	X
Bit 5	R/W	ALOSE	0
Bit 4	R/W	SQUELCHE	0
Bit 3	R/W	IDDQ_EN	0
Bit 2	R	DB_VALID	X
Bit 1		Unused	X
Bit 0	R/W	Reserved	1

**RESERVED**

The Reserved bit must be logic 1 for correct operation.

**DB\_VALID**

The DB\_VALID bit indicates if the adaptive equalizer has stabilized. This bit is set if the equalisation has not changed by more than 2dB (or +/-8 steps in the RAM table) in more than a selectable count of sampling periods.

**IDDQ\_EN**

The IDDQ enable bit (IDDQ\_EN) is used to configure the analogue receiver for IDDQ tests. When IDDQ\_EN is a logic 1, or the IDDQEN bit in the Master Test Control #1 register (004H) is a logic 1, the digital outputs of the analogue receiver are pulled to ground.

**SQUELCHE**

The output data squelch enable (SQUELCHE) allows control of data squelching in response to an analogue loss of signal (ALOS) condition. When SQUELCHE is set to logic 1, the recovered data are forced to all-zeros if the ALOS register bit is asserted. When SQUELCHE is set to logic 0, squelching is disabled.

**ALOSE**

The loss of signal interrupt enable bit (ALOSE) enables the generation of device level interrupt on a change of Loss of Signal status. When ALOSE is a logic 1, an interrupt is generated by asserting INTB low when there is a change of the ALOS status. ~~When ALOSE is set to logic 0, interrupts are disabled.~~

#### ALOSV

The loss of signal value bit (ALOSV) indicates the loss of signal alarm state.

#### ALOSI

The loss of signal interrupt bit (ALOSI) is a logic 1 whenever the Loss of Signal indicator state (ALOSV) changes. This bit is cleared when this register is read.

**Register 071H, 0F1H, 171H, 1F1H, 271H, 2F1H, 371H, 3F1H:  
RLPS ALOS Detection/Clearance Threshold**

Bit	Type	Function	Default
Bit 7	R/W	CLR_THR[3]Reserved	0
Bit 6	R/W	CLR_THR[2]	0
Bit 5	R/W	CLR_THR[1]	0
Bit 4	R/W	CLR_THR[0]	0
Bit 3	R/W	DET_THR[3]Reserved	0
Bit 2	R/W	DET_THR[2]	0
Bit 1	R/W	DET_THR[1]	0
Bit 0	R/W	DET_THR[0]	0

**Table 13 ALOS Detection/Clearance Thresholds**

THR	Signal level (dB)	Applicable Standard	Detection/Clearance
0000	8		
0001	9		
0010	10	G.775(E1)	Clearance (if <= 9dB)
0011	11		
0100	> 12dB		

**Note:**

- Cable loss uncertainty for T1 is +/-2dB with 0.2dB margin.
- Cable loss uncertainty for E1 is +/-1.5dB with 0.3dB margin.

**DET\_THR[23:0]**

DET\_THR[23:0] references one of the threshold settings in Table 13 as the ALOS detection criteria. If the equalised cable loss is greater than or equal to the threshold for N consecutive pulse periods, where N = 16 \* DET\_PER stored in the RLPS ALOS Detection Period Register, ALOS is declared and interrupt set.

**CLR\_THR[23:0]**

CLR\_THR[23:0] references one of the threshold settings listed in Table 13 as the ALOS clearance criteria. ALOS is cleared when the equalised cable loss is less than the threshold for N consecutive pulse intervals, where N = 16 \* CLR\_PER stored in the RLPS ALOS Clearance Period Register.

**Reserved**

The reserved bits must be set to logic 0 for correct operation.

**Register 072H, 0F2H, 172H, 1F2H, 272H, 2F2H, 372H, 3F2H: RLPS ALOS Detection Period**

Bit	Type	Function	Default
Bit 7	R/W	DET_PER[7]	0
Bit 6	R/W	DET_PER[6]	0
Bit 5	R/W	DET_PER[5]	0
Bit 4	R/W	DET_PER[4]	0
Bit 3	R/W	DET_PER[3]	0
Bit 2	R/W	DET_PER[2]	0
Bit 1	R/W	DET_PER[1]	0
Bit 0	R/W	DET_PER[0]	1

**DET\_PER[7:0]**

This register specifies the time duration that the equalised cable loss has to remain above the detection threshold in order for the ALOS to be issued. This duration is equal to DET\_PER \* 16 number of pulse intervals, the resulting range is from 16 to 4080 and thus compliant with all the presently available E1/T1 ALOS detection standards/recommendations.

**Note:**

- In T1 mode the recommended value for the DET\_PER[7:0] is 0x20h, which is not the default value.
- In E1 mode the recommended value for the DET\_PER[7:0] is 0x2Dh, which is not the default value.



**Register 073H, 0F3H, 173H, 1F3H, 273H, 2F3H, 373H, 3F3H: RLPS ALOS Clearance Period**

Bit	Type	Function	Default
Bit 7	R/W	CLR_PER[7]	0
Bit 6	R/W	CLR_PER[6]	0
Bit 5	R/W	CLR_PER[5]	0
Bit 4	R/W	CLR_PER[4]	0
Bit 3	R/W	CLR_PER[3]	0
Bit 2	R/W	CLR_PER[2]	0
Bit 1	R/W	CLR_PER[1]	0
Bit 0	R/W	CLR_PER[0]	1

**CLR\_PER[7:0]**

This register specifies the time duration that the equalised cable loss has to remain below the clearance threshold in order for the ALOS to be cleared. This duration is equal to CLR\_PER \* 16 number of pulse intervals resulting in a range from 16 to 4080 and thus compliant with all the presently available E1/T1 ALOS clearance standards/recommendations.

**Note:**

- In T1 mode the recommended value for the CLR\_PER[7:0] is 0x20h, which is not the default value.
- In E1 mode the recommended value for the CLR\_PER[7:0] is 0x2Dh, which is not the default value.

**Register 074H, 0F4H, 174H, 1F4H, 274H, 2F4H, 374H, 3F4H:  
RLPS Equalization Indirect Address**

Bit	Type	Function	Default
Bit 7	R/W	EQ_ADDR[7]	0
Bit 6	R/W	EQ_ADDR[6]	0
Bit 5	R/W	EQ_ADDR[5]	0
Bit 4	R/W	EQ_ADDR[4]	0
Bit 3	R/W	EQ_ADDR[3]	0
Bit 2	R/W	EQ_ADDR[2]	0
Bit 1	R/W	EQ_ADDR[1]	0
Bit 0	R/W	EQ_ADDR[0]	0

**EQ\_ADDR [7:0]**

Writing to this register initiates an internal uP access request cycle to the RAM. Depending on the setting of the RWB bit inside the RLPS Equalization Read/WriteB Select, a read or a write will be performed. During a write cycle, the indirect data bits located in the RLPS Equalization Indirect Data registers are written into the RAM. For a read request, the content of the addressed RAM location is written into the RLPS Equalization Indirect Data registers. This register should be the last register to be written for a uP access.

A waiting period of at least three line rate cycles is needed from when this register is written until the next indirect data bits are written into any of the respective octant's RLPS Equalization Indirect Data registers.

**Register 075H, 0F5H, 175H, 1F5H, 275H, 2F5H, 375H, 3F5H:  
RLPS Equalization Read/WriteB Select**

Bit	Type	Function	Default
Bit 7	R/W	RWB	1
Bit 6		Unused	X
Bit 5		Unused	X
Bit 4		Unused	X
Bit 3		Unused	X
Bit 2		Unused	X
Bit 1		Unused	X
Bit 0		Unused	X

**RWB**

This bit selects the operation to be performed on the RAM: when RWB is '1', a read from the equalization RAM is requested; when RWB is set to '0', a write to the RAM is desired.

**Register 076H, 0F6H, 176H, 1F6H, 276H, 2F6H, 376H, 3F6H:  
RLPS Equalizer Loop Status and Control**

Bit	Type	Function	Default
Bit 7	R/W	Unused	0
Bit 6	R/W	Unused	0
Bit 5	R/W	LOCATION[5]	0
Bit 4	R/W	LOCATION[4]	0
Bit 3	R/W	LOCATION[3]	0
Bit 2	R/W	LOCATION[2]	0
Bit 1	R/W	LOCATION[1]	0
Bit 0	R/W	LOCATION[0]	0

LOCATION[5:0]

Writing to this register overwrites a counter which serves as the read address to the equalization RAM. Reading this register returns the current value of the counter and thus an indication of the cable loss as estimated by the equaliser.

**Register 077H, 0F7H, 177H, 1F7H, 277H, 2F7H, 377H, 3F7H: RLPS Equalizer Configuration**

Bit	Type	Function	Default
Bit 7	R/W	Reserved	0
Bit 6	R/W	Reserved	0
Bit 5		Unused	X
Bit 4	R/W	Reserved	0
Bit 3	R/W	EQ_EN	0
Bit 2	R/W	Reserved	0
Bit 1	R/W	Reserved	1
Bit 0	R/W	Reserved	1

**EQ\_EN**

The EQ\_EN bit enables operation of the equaliser when set to logic 1. This bit defaults to logic 0 after reset and must be set to logic 1, but only after the equalisation RAM has been initialised.

**Reserved**

This bit must be set to its default value for normal operation.

**Register 078H, 0F8H, 178H, 1F8H, 278H, 2F8H, 378H, 3F8H:  
RLPS Equalization Indirect Data**

Bit	Type	Function	Default
7	R/W	EQ_DATA[31]	0
6	R/W	EQ_DATA[30]	0
5	R/W	EQ_DATA[29]	0
4	R/W	EQ_DATA[28]	0
3	R/W	EQ_DATA[27]	0
2	R/W	EQ_DATA[26]	0
1	R/W	EQ_DATA[25]	0
0	R/W	EQ_DATA[24]	0

EQ\_DATA[31:24]

This register consists of 2-parts: read-only and write-only. Writing this register affects the most significant byte of the input-data to the equalization RAM. Reading it returns the MSB of the RAM location indexed by the RLPS Equalization Indirect Address register.

**Register 079H, 0F9H, 179H, 1F9H, 279H, 2F9H, 379H, 3F9H:  
RLPS Equalization Indirect Data**

Bit	Type	Function	Default
7	R/W	EQ_DATA[23]	0
6	R/W	EQ_DATA[22]	0
5	R/W	EQ_DATA[21]	0
4	R/W	EQ_DATA[20]	0
3	R/W	EQ_DATA[19]	0
2	R/W	EQ_DATA[18]	0
1	R/W	EQ_DATA[17]	0
0	R/W	EQ_DATA[16]	0

**EQ\_DATA[23:16]**

This register consists of 2-parts: read-only and write-only. Writing this register affects the second most significant byte of the input-data to the equalization RAM. Reading it returns the second MSB of the RAM location indexed by the RLPS Equalization Indirect Address register.

**Register 07AH, 0FAH, 17AH, 1FAH, 27AH, 2FAH, 37AH, 3FAH:  
RLPS Equalization Indirect Data**

Bit	Type	Function	Default
7	R/W	EQ_DATA[15]	0
6	R/W	EQ_DATA[14]	0
5	R/W	EQ_DATA[13]	0
4	R/W	EQ_DATA[12]	0
3	R/W	EQ_DATA[11]	0
2	R/W	EQ_DATA[10]	0
1	R/W	EQ_DATA[9]	0
0	R/W	EQ_DATA[8]	0

**EQ\_DATA[15:8]**

This register consists of 2-parts: read-only and write-only. Writing this register affects the second least significant byte of the input-data to the equalization RAM. Reading it returns the corresponding bits of the RAM location indexed by the RLPS Equalization Indirect Address register.



**Register 07BH, 0FBH, 17BH, 1FBH, 27BH, 2FBH, 37BH, 3FBH:  
RLPS Equalization Indirect Data**

Bit	Type	Function	Default
7	R/W	EQ_DATA[7]	0
6	R/W	EQ_DATA[6]	0
5	R/W	EQ_DATA[5]	0
4	R/W	EQ_DATA[4]	0
3	R/W	EQ_DATA[3]	0
2	R/W	EQ_DATA[2]	0
1	R/W	EQ_DATA[1]	0
0	R/W	EQ_DATA[0]	0

**EQ\_DATA[7:0]**

This register consists of 2-parts: read-only and write-only. Writing this register affects the least significant byte of the input-data to the equalization RAM. Reading it returns the LSB of the RAM location indexed by the RLPS Equalization Indirect Address register.

**Register 07CH, 0FCH, 17CH, 1FCH, 27CH, 2FCH, 37CH, 3FCH:  
RLPS Equalizer Voltage Thresholds #1**

Bit	Type	Function	Default
7		unused	X
6		unused	X
5	R/W	VREF[5]	1
4	R/W	VREF[4]	1
3	R/W	VREF[3]	0
2	R/W	VREF[2]	1
1	R/W	VREF[1]	0
0	R/W	VREF[0]	1

**VREF[5:0]**

The VREF[5:0] bits set the voltage thresholds of amplitude comparators within the RLPS. For T1 mode, the VREF[5:0] bits must be programmed to 26H ('b100110). For E1 mode, the VREF[5:0] bits must be programmed to 26H ('b100110).

**Register 07DH, 0FDH, 17DH, 1FDH, 27DH, 2FDH, 37DH, 3FDH:  
RLPS Equalizer Voltage Thresholds #2**

Bit	Type	Function	Default
7	R/W	CUTOFF[1]	0
6	R/W	CUTOFF[0]	0
5		Unused	X
4		Unused	X
3		Unused	X
2	R/W	VREF[8]	0
1	R/W	VREF[7]	1
0	R/W	VREF[6]	1

**CUTOFF[1:0]**

The CUTOFF[1:0] bits control cutoff frequencies of the bandlimiter and equaliser within the RLPS. For T1 mode, the CUTOFF[1:0] bits must be programmed to 3H ('b11). For E1 mode, the CUTOFF[1:0] bits must be programmed to 0H ('b00).

**VREF[8:6]**

The VREF[8:6] bits set the voltage thresholds of amplitude comparators within the RLPS. For T1 mode, the VREF[8:6] bits must be programmed to 3H ('b011). For E1 mode, the VREF[8:6] bits must be programmed to 3H ('b011).

**Note:**

- This register defaults to E1 mode.

## 11 Test Features Description

### 11.1 JTAG Test Port

The OCTLIU-SH JTAG Test Access Port (TAP) allows access to the TAP controller and the 4 TAP registers: instruction, bypass, device identification and boundary scan. Using the TAP, device input logic levels can be read, device outputs can be forced, the device can be identified and the device scan path can be bypassed. For more details on the JTAG port, please refer to the Operations section.

#### Instruction Register

Length: 3 bits

Instructions	Selected Register	Instruction Codes, IR[2:0]
EXTEST	Boundary Scan	000
IDCODE	Identification	001
SAMPLE	Boundary Scan	010
BYPASS	Bypass	011
BYPASS	Bypass	100
STCTEST	Boundary Scan	101
BYPASS	Bypass	110
BYPASS	Bypass	111

#### Identification Register

Length – 32 bits

Version number – 1H for Rev A.

Part Number – 4318H

Manufacturer's identification code – 0CDH

Device identification – 143180CDH for Rev. A

## Boundary Scan Register

Length: 131

Table 14 Boundary Scan Register

Pin/Enable	Scan Register Bit	Cell Type	Device ID	Pin/Enable	Scan Register Bit	Cell Type	
A[10]	130	IN_CELL	0	DACTIVE	64	OUT_CELL	-
A[9]	129	IN_CELL	0	OEB_DDATA[7]	63	OUT_CELL	-
A[8]	128	IN_CELL	0	DDATA[7]	62	OUT_CELL	-
A[7]	127	IN_CELL	1	Unused	61	OUT_CELL	-
A[6]	126	IN_CELL	0	Unused	60	OUT_CELL	-
A[5]	125	IN_CELL	1	APL	59	IN_CELL	-
A[4]	124	IN_CELL	0	ADATA[4]	58	IN_CELL	-
A[3]	123	IN_CELL	0	Logic 0	57	IN_CELL	-
A[2]	122	IN_CELL	0	AV5	56	IN_CELL	-
A[1]	121	IN_CELL	0	ADATA[5]	55	IN_CELL	-
A[0]	120	IN_CELL	1	Logic 0	54	IN_CELL	-
Logic 0	119	IN_CELL	1	Logic 0	53	IN_CELL	-
ADATA[0]	118	IN_CELL	0	ADATA[6]	52	IN_CELL	-
REFCLK	117	IN_CELL	0	Logic 0	51	IN_CELL	-
Logic 0	116	IN_CELL	0	Logic 0	50	IN_CELL	-
ADATA[1]	115	IN_CELL	1	ADATA[7]	49	IN_CELL	-
AC1FP	114	IN_CELL	1	Logic 0	48	IN_CELL	-
Logic 0	113	IN_CELL	0	Logic 0	47	IN_CELL	-
ADATA[2]	112	IN_CELL	0	Logic 0	46	IN_CELL	-
DC1FP	111	IN_CELL	0	Unused	45	OUT_CELL	-
Logic 0	110	IN_CELL	0	Unused	44	IO_CELL	-
ADATA[3]	109	IN_CELL	0	Unused	43	OUT_CELL	-
ADP	108	IN_CELL	0	Unused	42	IO_CELL	-
Unused	107	OUT_CELL	0	OEB_PO	41	OUT_CELL	-
Unused	106	OUT_CELL	1	PO	40	OUT_CELL	-
OEB_DDATA[0]	105	OUT_CELL	1	PI	39	IN_CELL	-
DDATA[0]	104	OUT_CELL	0	OEB_PI	38	OUT_CELL	-
Unused	103	OUT_CELL	0	Unused	37	OUT_CELL	-
Unused	102	OUT_CELL	1	Unused	36	OUT_CELL	-
Unused	101	OUT_CELL	1	Unused	35	OUT_CELL	-
Unused	100	OUT_CELL	0	Unused	34	OUT_CELL	-
OEB_DDATA[1]	99	OUT_CELL	1	Unused	33	OUT_CELL	-
DDATA[1]	98	OUT_CELL	-	Logic 0	32	IN_CELL	-

Pin/Enable	Scan Register Bit	Cell Type	Device ID	Pin/Enable	Scan Register Bit	Cell Type	
Unused	97	OUT_CELL	-	OEB_LOS_L1	31	OUT_CELL	-
Unused	96	OUT_CELL	-	LOS_L1	30	OUT_CELL	-
Unused	95	OUT_CELL	-	OEB_LOS	29	OUT_CELL	-
Unused	94	OUT_CELL	-	LOS	28	OUT_CELL	-
OEB_DDDATA[2]	93	OUT_CELL	-	OEB_RSYNC	27	OUT_CELL	-
DDATA[2]	92	OUT_CELL	-	RSYNC	26	OUT_CELL	-
OEB_C1FPOUT	91	OUT_CELL	-	RES[1]	25	IN_CELL	-
C1FPOUT	90	OUT_CELL	-	RSTB	24	IN_CELL	-
Unused	89	OUT_CELL	-	XCLK	23	IN_CELL	-
Unused	88	OUT_CELL	-	Logic 1	22	IN_CELL	-
OEB_DDDATA[3]	87	OUT_CELL	-	OEB_D[7]	21	OUT_CELL	-
DDATA[3]	86	OUT_CELL	-	D[7]	20	IO_CELL	-
OEB_DDP	85	OUT_CELL	-	OEB_D[6]	19	OUT_CELL	-
DDP	84	OUT_CELL	-	D[6]	18	IO_CELL	-
OEB_DPL	83	OUT_CELL	-	OEB_D[5]	17	OUT_CELL	-
DPL	82	OUT_CELL	-	D[5]	16	IO_CELL	-
OEB_DDDATA[4]	81	OUT_CELL	-	OEB_D[4]	15	OUT_CELL	-
DDATA[4]	80	OUT_CELL	-	D[4]	14	IO_CELL	-
Unused	79	OUT_CELL	-	OEB_D[3]	13	OUT_CELL	-
Unused	78	OUT_CELL	-	D[3]	12	IO_CELL	-
OEB_DV5	77	OUT_CELL	-	OEB_D[2]	11	OUT_CELL	-
DV5	76	OUT_CELL	-	D[2]	10	IO_CELL	-
OEB_DDDATA[5]	75	OUT_CELL	-	OEB_D[1]	9	OUT_CELL	-
DDATA[5]	74	OUT_CELL	-	D[1]	8	IO_CELL	-
Unused	73	OUT_CELL	-	OEB_D[0]	7	OUT_CELL	-
Unused	72	OUT_CELL	-	D[0]	6	IO_CELL	-
Unused	71	OUT_CELL	-	OEB_INTB	5	OUT_CELL	-
Unused	70	OUT_CELL	-	INTB	4	IO_CELL	-
OEB_DDDATA[6]	69	OUT_CELL	-	CSB	3	IN_CELL	-
DDATA[6]	68	OUT_CELL	-	RDB	2	IN_CELL	-
Unused	67	OUT_CELL	-	WRB	1	IN_CELL	-
Unused	66	OUT_CELL	-	ALE	0	IN_CELL	-
OEB_DACTIVE	65	OUT_CELL	-				

**Notes:**

1. OEB signals, when set low, will set the corresponding bi-directional signal to an output.
2. OEB signals, when set high, will set the corresponding output to high impedance.
3. ALE is the first bit in the boundary scan chain scanned in and out. It is closest to TDO in the scan chain.

4. IN\_CELL's labelled "Logic 0" will always capture 0, since they are permanently tied to VSS.
5. IN\_CELL's labelled "Logic 1" will always capture 1, since they are permanently tied to VDD.

Downloaded by ahmed metwaly of siliconexpert on Monday, 06 January, 2003 06:07:44 AM

## 12 Operation

### 12.1 Configuring the OCTLIU-SH from Reset

After a system reset (either via the RSTB pin or via the RESET register bit), the OCTLIU-SH will default to the following settings:

**Table 15 Default Settings**

Setting	Receiver Section	Transmitter Section
T1/E1 mode	T1	T1
Line Code	B8ZS	B8ZS
Line interface	Pins RXTIP[x] and RXRING[x] active short haul analogue inputs	TX TIP1[x], TX TIP2[x], TX RING1[x], TX RING2[x] tristated
Timing Options	Not applicable	Jitter attenuation enabled, with output clock frequency referenced to the serial SBI transmit clock.
Diagnostics	All diagnostic modes disabled	All diagnostic modes disabled

### 12.2 Servicing Interrupts

The OCTLIU-SH will assert INTB to logic 0 when a condition that is configured to produce an interrupt occurs. To find which condition caused this interrupt to occur, the procedure outlined below should be followed:

1. Read the bits of the Master Interrupt Source registers (002H and 003H) to identify which octants and/or SBI interface blocks generated the interrupt. For example, a logic one read in the LIU[2] bit of the Master Interrupt Source #1 register indicates that octant #2 produced the interrupt.
2. Read the bits of the second level Line Interface Interrupt Source registers to identify the block within the octant generating the interrupt.

The Interrupt Source registers for octant #1 are at addresses 00CH and 00DH.

The Interrupt Source registers for octant #2 are at addresses 08CH and 08DH.

The Interrupt Source registers for octant #3 are at addresses 10CH and 10DH.

The Interrupt Source registers for octant #4 are at addresses 18CH and 18DH.

The Interrupt Source registers for octant #5 are at addresses 20CH and 20DH.

The Interrupt Source registers for octant #6 are at addresses 28CH and 28DH.

The Interrupt Source registers for octant #7 are at addresses 30CH and 30DH.

The Interrupt Source registers for octant #8 are at addresses 38CH and 38DH.

3. Read the third level Interrupt Source bits to identify the interrupt source. (These bits are contained within the registers for the various functional blocks.)



4. Service the interrupt.
5. If the INTB pin is still logic 0, then there are still interrupts to be serviced. Otherwise, all interrupts have been serviced. Wait for the next assertion of INTB

### 12.3 Using the Performance Monitoring Features

The PMON blocks are provided for performance monitoring purposes. The PMON blocks within each LIU are used to monitor LCV events. An accumulation interval is initiated by writing to one of the PMON event counter register addresses or by writing to the Line Interface Interrupt Source / PMON Update register. After initiating an accumulation interval, 3.5 recovered clock periods must be allowed to elapse to permit the PMON counter values to be properly transferred before the PMON registers may be read.

### 12.4 Using the Transmit Line Pulse Generator

The internal D/A pulse waveform template RAM, accessible via the microprocessor bus, can be used to create up to 12 custom waveforms. The RAM is accessed indirectly through the XLPG Pulse Waveform Storage Write Address and XLPG Pulse Waveform Storage Data registers. The values written into the pulse waveform storage registers correspond to one of 127 quantized levels. 24 samples are output during every transmit clock cycle.

The waveform being programmed is completely arbitrary and programming must be done properly in order to meet the various T1 and E1 template specifications. The SCALE[4:0] bits of Line Driver Configuration Register bits are used to obtain a proper output amplitude. It must also be noted that since samples from the 5 UI are added before driving the DAC, it is possible to create arithmetic overflows.

The following tables contain the waveform values to be programmed for different situations. Table 16 to Table 21 specify waveform values typically used for short haul transmission. Table 22 to Table 27 specify waveform values for compliance to the AT&T TR62411 ACCUNET T1.5 pulse template. Table 28 and Table 29 specify waveform values for E1 transmission.

The programming of template values must observe the following sequencing rule: Samples must be written in groups of 5 at a time, each group consisting of the 5 UI values corresponding to a particular waveform and sample number. For example, the following programming sequence fragment is legal:

```

:
Write data for WAVEFORM=0, SAMPLE=0, UI=0
Write data for WAVEFORM=0, SAMPLE=0, UI=1
Write data for WAVEFORM=0, SAMPLE=0, UI=2
Write data for WAVEFORM=0, SAMPLE=0, UI=3
Write data for WAVEFORM=0, SAMPLE=0, UI=4
Write data for WAVEFORM=1, SAMPLE=12, UI=0
Write data for WAVEFORM=1, SAMPLE=12, UI=1
Write data for WAVEFORM=1, SAMPLE=12, UI=2
Write data for WAVEFORM=1, SAMPLE=12, UI=3

```

Write data for WAVEFORM=1, SAMPLE=12, UI=4  
:

Whereas the following sequence fragment is illegal:

```

:
Write data for WAVEFORM=0, SAMPLE=0, UI=0
Write data for WAVEFORM=0, SAMPLE=1, UI=0
Write data for WAVEFORM=0, SAMPLE=2, UI=0
Write data for WAVEFORM=0, SAMPLE=3, UI=0
Write data for WAVEFORM=0, SAMPLE=4, UI=0
Write data for WAVEFORM=0, SAMPLE=5, UI=0
Write data for WAVEFORM=0, SAMPLE=6, UI=0
Write data for WAVEFORM=0, SAMPLE=7, UI=0
Write data for WAVEFORM=0, SAMPLE=8, UI=0
Write data for WAVEFORM=0, SAMPLE=9, UI=0
:

```

This restriction is necessary because each group of five 7-bit samples is stored in a temporary holding register as it is written. The 5 samples are then transferred to the pulse template RAM as a single 35-bit word when the 5<sup>th</sup> sample (i.e. the sample whose UI[2:0] address field is set to 4) is written.

Prior to commencing normal operation, the HIGHZ bit of the octant's XLPG Line Driver Configuration register must be programmed to logic 0 to remove the high impedance state from the TXTIP1[x], TXTIP2[x], TXRING1[x] and TXRING2[x] Transmit outputs.

The Pulse Template Selection (PT\_SEL[3:0]) bits in registers 00BH, 08BH, 10BH, 18BH, 20BH, 30BH and 38BH select the waveforms to be used by each octant.

When PT\_SEL[3:0] = "0000", [Pulse Template](#) RAM table 1 is selected.  
 When PT\_SEL[3:0] = "0001", [Pulse Template](#) RAM table 2 is selected.  
 When PT\_SEL[3:0] = "0010", [Pulse Template](#) RAM table 3 is selected.  
 When PT\_SEL[3:0] = "0011", [Pulse Template](#) RAM table 4 is selected.  
 When PT\_SEL[3:0] = "0100", [Pulse Template](#) RAM table 5 is selected.  
 When PT\_SEL[3:0] = "0101", [Pulse Template](#) RAM table 6 is selected.  
 When PT\_SEL[3:0] = "0110", [Pulse Template](#) RAM table 7 is selected.  
 When PT\_SEL[3:0] = "0111", [Pulse Template](#) RAM table 8 is selected.  
 When PT\_SEL[3:0] = "1000", [Pulse Template](#) RAM table 9 is selected.  
 When PT\_SEL[3:0] = "1001", [Pulse Template](#) RAM table 10 is selected.  
 When PT\_SEL[3:0] = "1010", [Pulse Template](#) RAM table 11 is selected.  
 When PT\_SEL[3:0] = "1011", [Pulse Template](#) RAM table 12 is selected.

**Note:**

- [The internal pulse template RAM tables 1-12 which are indexed by PT\\_SEL\[3:0\] must be initialized via the microprocessor interface. Recommended values for the various short-haul standards are shown in tables Table 16 through Table 29.](#)

**Table 16 T1.102 Transmit Waveform Values for T1 Short Haul (0 – 110 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	44	00	00	00
2	00	43	00	00	00
3	0F	42	00	00	00
4	27	42	00	00	00
5	3A	41	00	00	00
6	39	41	00	00	00
7	37	00	00	00	00
8	35	00	00	00	00
9	34	00	00	00	00
10	34	00	00	00	00
11	34	00	00	00	00
12	34	00	00	00	00
13	34	00	00	00	00
14	33	00	00	00	00
15	2B	00	00	00	00
16	21	00	00	00	00
17	55	00	00	00	00
18	54	00	00	00	00
19	50	00	00	00	00
20	4E	00	00	00	00
21	4B	00	00	00	00
22	49	00	00	00	00
23	47	00	00	00	00
24	44	00	00	00	00

Note: SCALE[4:0] programmed to 0BH.

**Table 17 T1.102 Transmit Waveform Values for T1 Short Haul (110 – 220 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	45	00	00	00
2	00	44	00	00	00
3	1E	43	00	00	00
4	30	42	00	00	00
5	3C	41	00	00	00
6	39	00	00	00	00
7	34	00	00	00	00
8	31	00	00	00	00
9	31	00	00	00	00
10	30	00	00	00	00
11	30	00	00	00	00
12	30	00	00	00	00
13	30	00	00	00	00
14	30	00	00	00	00
15	25	00	00	00	00
16	0D	00	00	00	00
17	65	00	00	00	00
18	5A	00	00	00	00
19	54	00	00	00	00
20	50	00	00	00	00
21	4B	00	00	00	00
22	49	00	00	00	00
23	48	00	00	00	00
24	44	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 0DH.

**Table 18 T1.102 Transmit Waveform Values for T1 Short Haul (220 – 330 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	45	00	00	00
2	19	43	00	00	00
3	2D	43	00	00	00
4	3C	42	00	00	00
5	3A	00	00	00	00
6	37	00	00	00	00
7	32	00	00	00	00
8	31	00	00	00	00
9	2F	00	00	00	00
10	2E	00	00	00	00
11	2D	00	00	00	00
12	2D	00	00	00	00
13	2C	00	00	00	00
14	2B	00	00	00	00
15	14	00	00	00	00
16	6C	00	00	00	00
17	5D	00	00	00	00
18	54	00	00	00	00
19	52	00	00	00	00
20	4E	00	00	00	00
21	4C	00	00	00	00
22	4B	00	00	00	00
23	47	00	00	00	00
24	46	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 0EH.

**Table 19 T1.102 Transmit Waveform Values for T1 Short Haul (330 – 440 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	44	00	00	00
2	21	43	00	00	00
3	36	42	00	00	00
4	3E	41	00	00	00
5	39	00	00	00	00
6	34	00	00	00	00
7	2F	00	00	00	00
8	2E	00	00	00	00
9	2E	00	00	00	00
10	2D	00	00	00	00
11	2D	00	00	00	00
12	2C	00	00	00	00
13	2C	00	00	00	00
14	28	00	00	00	00
15	01	00	00	00	00
16	75	00	00	00	00
17	5D	00	00	00	00
18	54	00	00	00	00
19	4F	00	00	00	00
20	4C	00	00	00	00
21	49	00	00	00	00
22	47	00	00	00	00
23	46	00	00	00	00
24	45	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 0FH.

**Table 20 T1.102 Transmit Waveform Values for T1 Short Haul (440 – 550 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	44	00	00	00
2	1D	43	00	00	00
3	39	43	00	00	00
4	3E	42	00	00	00
5	3B	42	00	00	00
6	31	02	00	00	00
7	2E	02	00	00	00
8	2D	00	00	00	00
9	2C	00	00	00	00
10	2C	00	00	00	00
11	2B	00	00	00	00
12	2B	00	00	00	00
13	29	00	00	00	00
14	21	00	00	00	00
15	08	00	00	00	00
16	7E	00	00	00	00
17	68	00	00	00	00
18	5A	00	00	00	00
19	52	00	00	00	00
20	4C	00	00	00	00
21	49	00	00	00	00
22	47	00	00	00	00
23	46	00	00	00	00
24	45	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 10H.

**Table 21 T1.102 Transmit Waveform Values for T1 Short Haul (550 – 660 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	44	00	00	00
2	03	44	00	00	00
3	37	43	00	00	00
4	3E	42	00	00	00
5	37	41	00	00	00
6	31	00	00	00	00
7	26	00	00	00	00
8	27	00	00	00	00
9	26	00	00	00	00
10	26	00	00	00	00
11	25	00	00	00	00
12	24	00	00	00	00
13	24	00	00	00	00
14	26	00	00	00	00
15	17	00	00	00	00
16	7E	00	00	00	00
17	71	00	00	00	00
18	59	00	00	00	00
19	55	00	00	00	00
20	4A	00	00	00	00
21	49	00	00	00	00
22	47	00	00	00	00
23	46	00	00	00	00
24	45	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 12H.



**Table 22 TR62411 Transmit Waveform Values for T1 Short Haul (0 – 110 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	41	00	00	00
2	00	41	00	00	00
3	0F	41	00	00	00
4	27	41	00	00	00
5	3A	41	00	00	00
6	39	00	00	00	00
7	37	00	00	00	00
8	35	00	00	00	00
9	34	00	00	00	00
10	34	00	00	00	00
11	34	00	00	00	00
12	34	00	00	00	00
13	34	00	00	00	00
14	33	00	00	00	00
15	2B	00	00	00	00
16	21	00	00	00	00
17	57	00	00	00	00
18	56	00	00	00	00
19	51	00	00	00	00
20	4D	00	00	00	00
21	49	00	00	00	00
22	45	00	00	00	00
23	43	00	00	00	00
24	41	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 0BH.

**Table 23 TR62411 Transmit Waveform Values for T1 Short Haul (110 – 220 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	41	00	00	00
2	00	41	00	00	00
3	1E	41	00	00	00
4	30	41	00	00	00
5	3C	00	00	00	00
6	39	00	00	00	00
7	34	00	00	00	00
8	31	00	00	00	00
9	31	00	00	00	00
10	30	00	00	00	00
11	30	00	00	00	00
12	30	00	00	00	00
13	30	00	00	00	00
14	30	00	00	00	00
15	25	00	00	00	00
16	0D	00	00	00	00
17	65	00	00	00	00
18	5A	00	00	00	00
19	54	00	00	00	00
20	50	00	00	00	00
21	4C	00	00	00	00
22	46	00	00	00	00
23	43	00	00	00	00
24	41	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 0DH.

**Table 24 TR62411 Transmit Waveform Values for T1 Short Haul (220 – 330 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	41	00	00	00
2	19	41	00	00	00
3	2D	41	00	00	00
4	3C	41	00	00	00
5	3A	00	00	00	00
6	37	00	00	00	00
7	32	00	00	00	00
8	31	00	00	00	00
9	2F	00	00	00	00
10	2E	00	00	00	00
11	2D	00	00	00	00
12	2D	00	00	00	00
13	2C	00	00	00	00
14	2B	00	00	00	00
15	14	00	00	00	00
16	6C	00	00	00	00
17	5E	00	00	00	00
18	55	00	00	00	00
19	52	00	00	00	00
20	4E	00	00	00	00
21	46	00	00	00	00
22	45	00	00	00	00
23	41	00	00	00	00
24	41	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 0EH.

**Table 25 TR62411 Transmit Waveform Values for T1 Short Haul (330 – 440 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	41	00	00	00
2	21	41	00	00	00
3	36	41	00	00	00
4	3E	41	00	00	00
5	39	00	00	00	00
6	34	00	00	00	00
7	2F	00	00	00	00
8	2E	00	00	00	00
9	2E	00	00	00	00
10	2D	00	00	00	00
11	2D	00	00	00	00
12	2C	00	00	00	00
13	2C	00	00	00	00
14	28	00	00	00	00
15	01	00	00	00	00
16	75	00	00	00	00
17	5D	00	00	00	00
18	54	00	00	00	00
19	4F	00	00	00	00
20	4A	00	00	00	00
21	46	00	00	00	00
22	44	00	00	00	00
23	41	00	00	00	00
24	41	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 0FH.

**Table 26 TR62411 Transmit Waveform Values for T1 Short Haul (440 – 550 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	41	00	00	00
2	1D	41	00	00	00
3	39	41	00	00	00
4	3E	41	00	00	00
5	3B	00	00	00	00
6	31	00	00	00	00
7	2E	00	00	00	00
8	2D	00	00	00	00
9	2C	00	00	00	00
10	2C	00	00	00	00
11	2B	00	00	00	00
12	2B	00	00	00	00
13	29	00	00	00	00
14	21	00	00	00	00
15	08	00	00	00	00
16	7E	00	00	00	00
17	68	00	00	00	00
18	5A	00	00	00	00
19	52	00	00	00	00
20	4B	00	00	00	00
21	41	00	00	00	00
22	41	00	00	00	00
23	41	00	00	00	00
24	41	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 10H.

**Table 27 TR62411 Transmit Waveform Values for T1 Short Haul (550 – 660 ft.)**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	41	00	00	00
2	03	41	00	00	00
3	37	41	00	00	00
4	3E	41	00	00	00
5	37	00	00	00	00
6	31	00	00	00	00
7	26	00	00	00	00
8	27	00	00	00	00
9	26	00	00	00	00
10	26	00	00	00	00
11	25	00	00	00	00
12	24	00	00	00	00
13	24	00	00	00	00
14	26	00	00	00	00
15	17	00	00	00	00
16	7E	00	00	00	41
17	70	00	00	00	41
18	59	00	00	00	01
19	51	00	00	00	01
20	4B	00	00	00	01
21	42	00	00	00	00
22	41	00	00	00	00
23	41	00	00	00	00
24	41	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 12H.

**Table 28 Transmit Waveform Values for E1 120 Ohm**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	00	00	00	00
2	00	00	00	00	00
3	0A	00	00	00	00
4	3C	00	00	00	00
5	3C	00	00	00	00
6	37	00	00	00	00
7	35	00	00	00	00
8	34	00	00	00	00
9	34	00	00	00	00
10	34	00	00	00	00
11	34	00	00	00	00
12	34	00	00	00	00
13	34	00	00	00	00
14	34	00	00	00	00
15	27	00	00	00	00
16	00	00	00	00	00
17	47	00	00	00	00
18	41	00	00	00	00
19	00	00	00	00	00
20	00	00	00	00	00
21	00	00	00	00	00
22	00	00	00	00	00
23	00	00	00	00	00
24	00	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 0AH.

**Table 29 Transmit Waveform Values for E1 75 Ohm**

Sample number	UI #0	UI #1	UI #2	UI #3	UI #4
1	00	00	00	00	00
2	00	00	00	00	00
3	00	00	00	00	00
4	3A	00	00	00	00
5	37	00	00	00	00
6	38	00	00	00	00
7	38	00	00	00	00
8	37	00	00	00	00
9	36	00	00	00	00
10	36	00	00	00	00
11	35	00	00	00	00
12	35	00	00	00	00
13	35	00	00	00	00
14	35	00	00	00	00
15	36	00	00	00	00
16	0A	00	00	00	00
17	00	00	00	00	00
18	00	00	00	00	00
19	00	00	00	00	00
20	00	00	00	00	00
21	00	00	00	00	00
22	00	00	00	00	00
23	00	00	00	00	00
24	00	00	00	00	00

**Note:**

- SCALE[4:0] programmed to 0DH.



## 12.5 Using the Line Receiver

The line receiver must be properly initialized for correct operation. Several register bits must be programmed and the equalizer RAM table must be initialized according to the appropriate table below.

The RLPS equalizer RAM content is programmed by the RLPS Equalization Indirect Data registers for each address location. The address location is given by the octant's RLPS Equalization Indirect Address register. A read or write request is done by setting the RWB bit in the octant's RLPS Equalization Read/WriteB Select register.

Note that several registers are not their default values. The EQ\_EN bit of the RLPS Equalizer Configuration register must be set to logic 1. The CUTOFF[1:0] bits of the RLPS Voltage Thresholds #2 register must be programmed to 3H (11B) for T1 mode or 0H (00B) for E1 mode. Table 30 summarizes the values the RLPS registers are to contain.

**Table 30 RLPS Register Programming**

Register	Data Value	
	Bin	Hex
RLPS Configuration and Status	XX000XX1	01H
RLPS ALOS Detection/ Clearance Threshold	X000X000	00H
RLPS ALOS Detection Period	00000001	01H
RLPS ALOS Clearance Period	00000001	01H
RLPS Equalization Indirect Address	00000000	00H
RLPS Equalization RAM Read/WriteB Select	1XXXXXXXX	80H
RLPS Equalizer Loop Status and Control	00000000	00H
RLPS Equalizer Configuration	00X01011	0BH
RLPS Equalization Indirect Data[31:24]	*	*
RLPS Equalization Indirect Data[23:16]	*	*
RLPS Equalization Indirect Data[15:8]	*	*
RLPS Equalization Indirect Data[7:0]	*	*
RLPS Voltage Thresholds #1	XX100110	26H
RLPS Voltage Thresholds #2		
(T1 mode)	11XXX011	C3H
(E1 mode)	00XXX011	03H

Since the line receiver supports both E1 and T1 standards over short haul cables, the line receiver has two normal modes of operation, as selected by the E1/T1B bit of the Global Configuration register.

Access to the Equalizer RAM is provided by means of Indirect Access Registers. A typical programming sequence follows. This programming sequence is repeated for each of the 256 Equalizer RAM Addresses.

WRITE RLPS Indirect Data Register <31 - 24 Bits of Data>  
 WRITE RLPS Indirect Data Register <23 - 16 Bits of Data>  
 WRITE RLPS Indirect Data Register <15 - 8 Bits of Data>  
 WRITE RLPS Indirect Data Register <7 - 0 Bits of Data>  
 ACTION RLPS Equalisation Read/WriteB Select Register  
 <A=80H for "read"; A=00H for "write" action>  
 WRITE RLPS Equalisation Indirect Address Register  
 <address from 0 to 255>  
 PAUSE <wait 3 line rate clock cycles>

**Table 31 RLPS Equalizer RAM Table (T1 mode)**

RAM Address	Content (MSB..LSB)	RAM Address	Content (MSB..LSB)
00D	0x03061C3F	128D	0x424E0F3D
01D	0x03061C3D	129D	0x424E0F3D
02D	0x03061C3A	130D	0x424E0F3D
03D	0x03062C3D	131D	0x424E0F3D
04D	0x03062C3B	132D	0x424E0F3D
05D	0x03062C38	133D	0x424E0F3D
06D	0x030E2C3F	134D	0x424E0F3D
07D	0x030E2C3C	135D	0x424E0F3D
08D	0x030E2C38	136D	0x424E0F3D
09D	0x03162C3F	137D	0x424E0F3D
10D	0x03162C3D	138D	0x424E0F3D
11D	0x03162C3A	139D	0x424E0F3D
12D	0x03163C3F	140D	0x424E0F3D
13D	0x03163C38	141D	0x424E0F3D
14D	0x0316283B	142D	0x424E0F3D
15D	0x0316383B	143D	0x424E0F3D
16D	0x03163CBB	144D	0x424E0F3D
17D	0x031E3CBF	145D	0x424E0F3D
18D	0x031E3CBD	146D	0x424E0F3D
19D	0x031E3CBA	147D	0x424E0F3D
20D	0x031E3CB8	148D	0x424E0F3D
21D	0x03263CBC	149D	0x424E0F3D
22D	0x032628BA	150D	0x424E0F3D
23D	0x032638BB	151D	0x424E0F3D
24D	0x0B263D3F	152D	0x424E0F3D
25D	0x0B263D3E	153D	0x424E0F3D

RAM Address	Content (MSB..LSB)	RAM Address	Content (MSB..LSB)
26D	0x0B263D3D	154D	0x424E0F3D
27D	0x0B263D3C	155D	0x424E0F3D
28D	0x0B26293A	156D	0x424E0F3D
29D	0x0B26393F	157D	0x424E0F3D
30D	0x13262DB8	158D	0x424E0F3D
31D	0x132E2DBF	159D	0x424E0F3D
32D	0x132E2DBF	160D	0x424E0F3D
33D	0x132E2DBE	161D	0x424E0F3D
34D	0x132E2DBD	162D	0x424E0F3D
35D	0x132E2DBC	163D	0x424E0F3D
36D	0x132E2DBB	164D	0x424E0F3D
37D	0x132E19B8	165D	0x424E0F3D
38D	0x132E29BF	166D	0x424E0F3D
39D	0x1B2E1E38	167D	0x424E0F3D
40D	0x1B361E3F	168D	0x424E0F3D
41D	0x1B361E3C	169D	0x424E0F3D
42D	0x1B361E3B	170D	0x424E0F3D
43D	0x1B360A3B	171D	0x424E0F3D
44D	0x1B361A3B	172D	0x424E0F3D
45D	0x23361EBF	173D	0x424E0F3D
46D	0x23361EB8	174D	0x424E0F3D
47D	0x23361EBF	175D	0x424E0F3D
48D	0x233E1EBD	176D	0x424E0F3D
49D	0x2B3E1EBB	177D	0x424E0F3D
50D	0x2B3E1EB8	178D	0x424E0F3D
51D	0x2B461EBF	179D	0x424E0F3D
52D	0x33461EBD	180D	0x424E0F3D
53D	0x33461EBA	181D	0x424E0F3D
54D	0x33461EB8	182D	0x424E0F3D
55D	0x334E1EBA	183D	0x424E0F3D
56D	0x32461EBC	184D	0x424E0F3D
57D	0x3A4E1EBF	185D	0x424E0F3D
58D	0x3A4E1EBC	186D	0x424E0F3D
59D	0x3A4E0ABA	187D	0x424E0F3D
60D	0x3A4E1AB8	188D	0x424E0F3D
61D	0x424E1F3F	189D	0x424E0F3D
62D	0x424E0F3E	190D	0x424E0F3D
63D	0x424E0F3D	191D	0x424E0F3D
64D	0x424E0F3D	192D	0x424E0F3D
65D	0x424E0F3D	193D	0x424E0F3D

RAM Address	Content (MSB..LSB)	RAM Address	Content (MSB..LSB)
66D	0x424E0F3D	194D	0x424E0F3D
67D	0x424E0F3D	195D	0x424E0F3D
68D	0x424E0F3D	196D	0x424E0F3D
69D	0x424E0F3D	197D	0x424E0F3D
70D	0x424E0F3D	198D	0x424E0F3D
71D	0x424E0F3D	199D	0x424E0F3D
72D	0x424E0F3D	200D	0x424E0F3D
73D	0x424E0F3D	201D	0x424E0F3D
74D	0x424E0F3D	202D	0x424E0F3D
75D	0x424E0F3D	203D	0x424E0F3D
76D	0x424E0F3D	204D	0x424E0F3D
77D	0x424E0F3D	205D	0x424E0F3D
78D	0x424E0F3D	206D	0x424E0F3D
79D	0x424E0F3D	207D	0x424E0F3D
80D	0x424E0F3D	208D	0x424E0F3D
81D	0x424E0F3D	209D	0x424E0F3D
82D	0x424E0F3D	210D	0x424E0F3D
83D	0x424E0F3D	211D	0x424E0F3D
84D	0x424E0F3D	212D	0x424E0F3D
85D	0x424E0F3D	213D	0x424E0F3D
86D	0x424E0F3D	214D	0x424E0F3D
87D	0x424E0F3D	215D	0x424E0F3D
88D	0x424E0F3D	216D	0x424E0F3D
89D	0x424E0F3D	217D	0x424E0F3D
90D	0x424E0F3D	218D	0x424E0F3D
91D	0x424E0F3D	219D	0x424E0F3D
92D	0x424E0F3D	220D	0x424E0F3D
93D	0x424E0F3D	221D	0x424E0F3D
94D	0x424E0F3D	222D	0x424E0F3D
95D	0x424E0F3D	223D	0x424E0F3D
96D	0x424E0F3D	224D	0x424E0F3D
97D	0x424E0F3D	225D	0x424E0F3D
98D	0x424E0F3D	226D	0x424E0F3D
99D	0x424E0F3D	227D	0x424E0F3D
100D	0x424E0F3D	228D	0x424E0F3D
101D	0x424E0F3D	229D	0x424E0F3D
102D	0x424E0F3D	230D	0x424E0F3D
103D	0x424E0F3D	231D	0x424E0F3D
104D	0x424E0F3D	232D	0x424E0F3D
105D	0x424E0F3D	233D	0x424E0F3D

RAM Address	Content (MSB..LSB)	RAM Address	Content (MSB..LSB)
106D	0x424E0F3D	234D	0x424E0F3D
107D	0x424E0F3D	235D	0x424E0F3D
108D	0x424E0F3D	236D	0x424E0F3D
109D	0x424E0F3D	237D	0x424E0F3D
110D	0x424E0F3D	238D	0x424E0F3D
111D	0x424E0F3D	239D	0x424E0F3D
112D	0x424E0F3D	240D	0x424E0F3D
113D	0x424E0F3D	241D	0x424E0F3D
114D	0x424E0F3D	242D	0x424E0F3D
115D	0x424E0F3D	243D	0x424E0F3D
116D	0x424E0F3D	244D	0x424E0F3D
117D	0x424E0F3D	245D	0x424E0F3D
118D	0x424E0F3D	246D	0x424E0F3D
119D	0x424E0F3D	247D	0x424E0F3D
120D	0x424E0F3D	248D	0x424E0F3D
121D	0x424E0F3D	249D	0x424E0F3D
122D	0x424E0F3D	250D	0x424E0F3D
123D	0x424E0F3D	251D	0x424E0F3D
124D	0x424E0F3D	252D	0x424E0F3D
125D	0x424E0F3D	253D	0x424E0F3D
126D	0x424E0F3D	254D	0x424E0F3D
127D	0x424E0F3D	255D	0x424E0F3D

**Table 32 RLPS Equalizer RAM Table (E1 mode)**

RAM Address	Content (MSB..LSB)	RAM Address	Content (MSB..LSB)
00D	0x03062C3E	128D	0x3A5E6E3F
01D	0x03062C3C	129D	0x3A5E6E3F
02D	0x03062C3A	130D	0x3A5E6E3F
03D	0x03062C38	131D	0x3A5E6E3F
04D	0x030E2C3F	132D	0x3A5E6E3F
05D	0x030E2C38	133D	0x3A5E6E3F
06D	0x03162C3F	134D	0x3A5E6E3F
07D	0x03162C3B	135D	0x3A5E6E3F
08D	0x03162C38	136D	0x3A5E6E3F
09D	0x03163C3F	137D	0x3A5E6E3F
10D	0x03163C38	138D	0x3A5E6E3F
11D	0x031E3C3F	139D	0x3A5E6E3F
12D	0x031E3C3C	140D	0x3A5E6E3F
13D	0x031E3C3A	141D	0x3A5E6E3F

RAM Address	Content (MSB..LSB)	RAM Address	Content (MSB..LSB)
14D	0x031E3C39	142D	0x3A5E6E3F
15D	0x031E3C38	143D	0x3A5E6E3F
16D	0x031E4C3F	144D	0x3A5E6E3F
17D	0x031E4C3C	145D	0x3A5E6E3F
18D	0x031E4C3A	146D	0x3A5E6E3F
19D	0x031E4C38	147D	0x3A5E6E3F
20D	0x03264C3F	148D	0x3A5E6E3F
21D	0x03264C3B	149D	0x3A5E6E3F
22D	0x03264C38	150D	0x3A5E6E3F
23D	0x032E4C3F	151D	0x3A5E6E3F
24D	0x032E4C3B	152D	0x3A5E6E3F
25D	0x032E4C39	153D	0x3A5E6E3F
26D	0x032E4C38	154D	0x3A5E6E3F
27D	0x032E5C3F	155D	0x3A5E6E3F
28D	0x032E5C3D	156D	0x3A5E6E3F
29D	0x032E5C3B	157D	0x3A5E6E3F
30D	0x032E5C38	158D	0x3A5E6E3F
31D	0x032E6C3F	159D	0x3A5E6E3F
32D	0x032E6C38	160D	0x3A5E6E3F
33D	0x03366C3F	161D	0x3A5E6E3F
34D	0x03366C3C	162D	0x3A5E6E3F
35D	0x03366C3A	163D	0x3A5E6E3F
36D	0x03366C38	164D	0x3A5E6E3F
37D	0x03367C3F	165D	0x3A5E6E3F
38D	0x03367C3D	166D	0x3A5E6E3F
39D	0x03367C3C	167D	0x3A5E6E3F
40D	0x03367C3A	168D	0x3A5E6E3F
41D	0x03367C39	169D	0x3A5E6E3F
42D	0x03367C38	170D	0x3A5E6E3F
43D	0x0B3E7C3F	171D	0x3A5E6E3F
44D	0x0B3E683F	172D	0x3A5E6E3F
45D	0x0B3E683B	173D	0x3A5E6E3F
46D	0x0B3E683A	174D	0x3A5E6E3F
47D	0x0B3E6838	175D	0x3A5E6E3F
48D	0x0B3E6CBF	176D	0x3A5E6E3F
49D	0x133E6CBD	177D	0x3A5E6E3F
50D	0x133E6CBC	178D	0x3A5E6E3F
51D	0x133E6CBA	179D	0x3A5E6E3F
52D	0x133E58B8	180D	0x3A5E6E3F
53D	0x133E68BD	181D	0x3A5E6E3F

RAM Address	Content (MSB..LSB)	RAM Address	Content (MSB..LSB)
54D	0x1B3E6D3F	182D	0x3A5E6E3F
55D	0x1B3E6D3D	183D	0x3A5E6E3F
56D	0x1B3E6D3B	184D	0x3A5E6E3F
57D	0x1B3E6D3A	185D	0x3A5E6E3F
58D	0x1B3E6D38	186D	0x3A5E6E3F
59D	0x1B466D3F	187D	0x3A5E6E3F
60D	0x1B466D3D	188D	0x3A5E6E3F
61D	0x23466D3C	189D	0x3A5E6E3F
62D	0x23466D3A	190D	0x3A5E6E3F
63D	0x23465938	191D	0x3A5E6E3F
64D	0x23466938	192D	0x3A5E6E3F
65D	0x23466DBF	193D	0x3A5E6E3F
66D	0x23466DBC	194D	0x3A5E6E3F
67D	0x2B466DBA	195D	0x3A5E6E3F
68D	0x2B466DB8	196D	0x3A5E6E3F
69D	0x2B4E6DBF	197D	0x3A5E6E3F
70D	0x2A465DB8	198D	0x3A5E6E3F
71D	0x2A466DBD	199D	0x3A5E6E3F
72D	0x2A466DBB	200D	0x3A5E6E3F
73D	0x324E6DBD	201D	0x3A5E6E3F
74D	0x324E6DBB	202D	0x3A5E6E3F
75D	0x3A4E59B8	203D	0x3A5E6E3F
76D	0x3A4E69B8	204D	0x3A5E6E3F
77D	0x3A4E6E3F	205D	0x3A5E6E3F
78D	0x3A4E6E3C	206D	0x3A5E6E3F
79D	0x3A4E6E3A	207D	0x3A5E6E3F
80D	0x3A4E6E38	208D	0x3A5E6E3F
81D	0x3A566E3E	209D	0x3A5E6E3F
82D	0x3A566E38	210D	0x3A5E6E3F
83D	0x3A5E6E3F	211D	0x3A5E6E3F
84D	0x3A5E6E3F	212D	0x3A5E6E3F
85D	0x3A5E6E3F	213D	0x3A5E6E3F
86D	0x3A5E6E3F	214D	0x3A5E6E3F
87D	0x3A5E6E3F	215D	0x3A5E6E3F
88D	0x3A5E6E3F	216D	0x3A5E6E3F
89D	0x3A5E6E3F	217D	0x3A5E6E3F
90D	0x3A5E6E3F	218D	0x3A5E6E3F
91D	0x3A5E6E3F	219D	0x3A5E6E3F
92D	0x3A5E6E3F	220D	0x3A5E6E3F
93D	0x3A5E6E3F	221D	0x3A5E6E3F

RAM Address	Content (MSB..LSB)	RAM Address	Content (MSB..LSB)
94D	0x3A5E6E3F	222D	0x3A5E6E3F
95D	0x3A5E6E3F	223D	0x3A5E6E3F
96D	0x3A5E6E3F	224D	0x3A5E6E3F
97D	0x3A5E6E3F	225D	0x3A5E6E3F
98D	0x3A5E6E3F	226D	0x3A5E6E3F
99D	0x3A5E6E3F	227D	0x3A5E6E3F
100D	0x3A5E6E3F	228D	0x3A5E6E3F
101D	0x3A5E6E3F	229D	0x3A5E6E3F
102D	0x3A5E6E3F	230D	0x3A5E6E3F
103D	0x3A5E6E3F	231D	0x3A5E6E3F
104D	0x3A5E6E3F	232D	0x3A5E6E3F
105D	0x3A5E6E3F	233D	0x3A5E6E3F
106D	0x3A5E6E3F	234D	0x3A5E6E3F
107D	0x3A5E6E3F	235D	0x3A5E6E3F
108D	0x3A5E6E3F	236D	0x3A5E6E3F
109D	0x3A5E6E3F	237D	0x3A5E6E3F
110D	0x3A5E6E3F	238D	0x3A5E6E3F
111D	0x3A5E6E3F	239D	0x3A5E6E3F
112D	0x3A5E6E3F	240D	0x3A5E6E3F
113D	0x3A5E6E3F	241D	0x3A5E6E3F
114D	0x3A5E6E3F	242D	0x3A5E6E3F
115D	0x3A5E6E3F	243D	0x3A5E6E3F
116D	0x3A5E6E3F	244D	0x3A5E6E3F
117D	0x3A5E6E3F	245D	0x3A5E6E3F
118D	0x3A5E6E3F	246D	0x3A5E6E3F
119D	0x3A5E6E3F	247D	0x3A5E6E3F
120D	0x3A5E6E3F	248D	0x3A5E6E3F
121D	0x3A5E6E3F	249D	0x3A5E6E3F
122D	0x3A5E6E3F	250D	0x3A5E6E3F
123D	0x3A5E6E3F	251D	0x3A5E6E3F
124D	0x3A5E6E3F	252D	0x3A5E6E3F
125D	0x3A5E6E3F	253D	0x3A5E6E3F
126D	0x3A5E6E3F	254D	0x3A5E6E3F
127D	0x3A5E6E3F	255D	0x3A5E6E3F

**RLPS Equalizer RAM Table (T1 Monitor Mode)**

TBD



**LPS Equalizer RAM Table (E1 Monitor Mode)**

TBD

## 12.6 Using the PRBS Generator and Detector

PRBS patterns may be generated and detected in either the transmit or receive directions, as configured by the TX\_GEN, RX\_GEN and TX\_DET bits of the Line Interface PRBS Position registers.


## 12.7 Loopback Modes

The OCTLIU-SH provides two loopback modes to aid in network and system diagnostics. The network (line) loopback can be initiated at any time via the  $\mu$ P interface, but is usually initiated once an inband loopback activate code is detected. The system Diagnostic Digital loopback can be initiated at any time by the system via the  $\mu$ P interface to check the path of system data through the LIU.

### 12.7.1 Line Loopback

When LINE loopback (LINELB) is initiated by setting the LINELB bit in the Line Interface Diagnostics Register to logic 1, the LIU is configured to internally connect the recovered data to the transmit jitter attenuator, TJAT. The data sent to the TJAT is the recovered data from the output of the CDRC block. Note that when line loopback is enabled, the contents of the TJAT Reference Clock Divisor and Output Clock Divisor registers should be programmed to FFH to correctly attenuate the jitter on the receive clock. Conceptually, the data flow through a single octant of the OCTLIU-SH in this loopback mode is illustrated in Figure 13.


Figure 13 Line Loopback

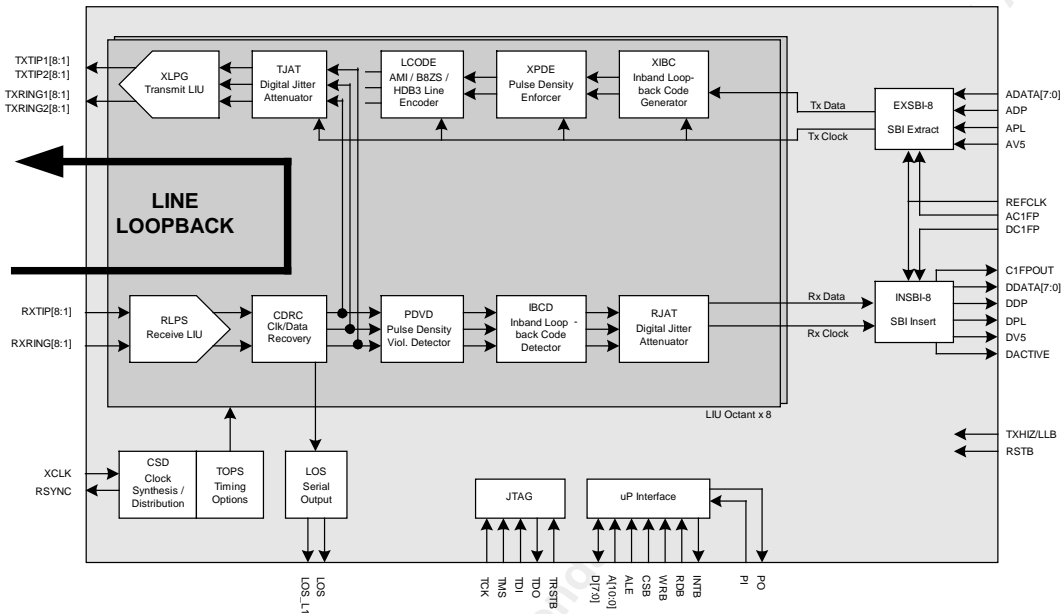

### 12.7.2 Diagnostic Digital Loopback

When Diagnostic Digital loopback (DDLB) mode is initiated by setting the DDLB bit in the Line Interface Diagnostics Register to logic 1, the OCTLIU-SH octant is configured to internally direct the output of the TJAT to the inputs of the receiver section. The dual-rail RZ outputs of the TJAT are directed to the dual-rail inputs of the CDRC. Conceptually, the data flow through a single octant of the OCTLIU-SH in this loopback condition is illustrated in Figure 14.

**Figure 14 Diagnostic Digital Loopback**

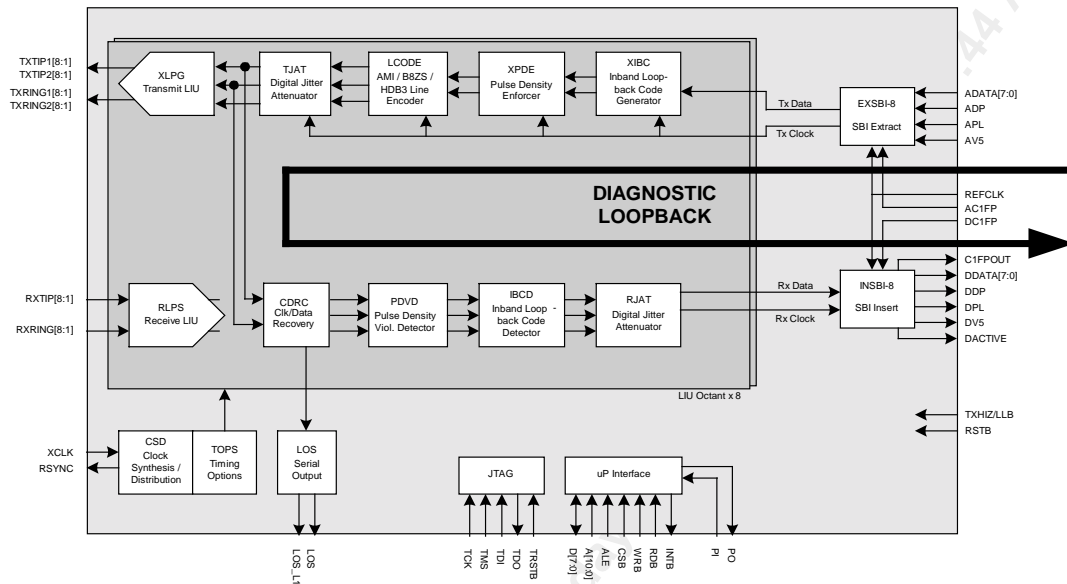

## 12.8 Initialization of the RJAT and TJAT

The recommended procedure to initialize the TJAT and RJAT is as follows:

1. Set the N1 and N2 values (this will reset the JAT PLL).
2. Wait 15ms for the JAT PLL to lock.
3. Toggle the FIFORST bit (this will reset and centre the JAT).


## 12.9 Configuring the SBI Bus

[For more information about configuring the SBI bus and using this device with other SBI devices, please see the PMC-Sierra document titled "Configuring SBI Compatible Devices" \(PMC-2020180\).](#)

### 12.9.12.10 JTAG Support

The OCTLIU-SH supports the IEEE Boundary Scan Specification as described in the IEEE 1149.1 standards. The Test Access Port (TAP) consists of the five standard pins, TRSTB, TCK, TMS, TDI and TDO used to control the TAP controller and the boundary scan registers. The TRSTB input is the active-low reset signal used to reset the TAP controller. TCK is the test clock used to sample data on the TDI primary input and to output data on the TDO primary output. The TMS primary input is used to direct the TAP controller through its states. The basic boundary scan architecture is shown below.

**Figure 15 Boundary Scan Architecture**

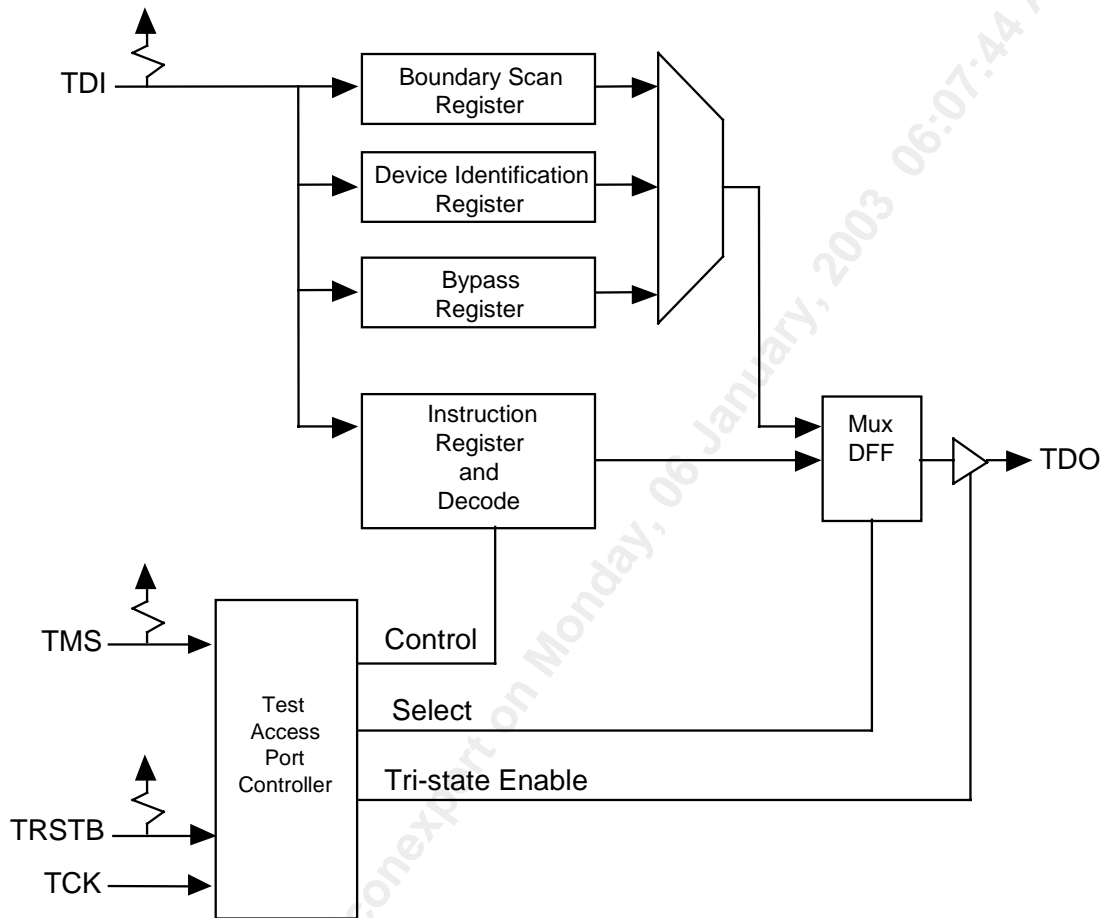


The boundary scan architecture consists of a TAP controller, an instruction register with instruction decode, a bypass register, a device identification register and a boundary scan register. The TAP controller interprets the TMS input and generates control signals to load the instruction and data registers. The instruction register with instruction decode block is used to select the test to be executed and/or the register to be accessed. The bypass register offers a single-bit delay from primary input, TDI to primary output, TDO. The device identification register contains the device identification code.

The boundary scan register allows testing of board inter-connectivity. The boundary scan register consists of a shift register placed in series with device inputs and outputs. Using the boundary scan register, all digital inputs can be sampled and shifted out on primary output, TDO. In addition, patterns can be shifted in on primary input, TDI, and forced onto all digital outputs.

**12.9.112.10.1 TAP Controller**

The TAP controller is a synchronous finite state machine clocked by the rising edge of primary input, TCK. All state transitions are controlled using primary input, TMS. The finite state machine is described below.

**Figure 16 TAP Controller Finite State Machine**

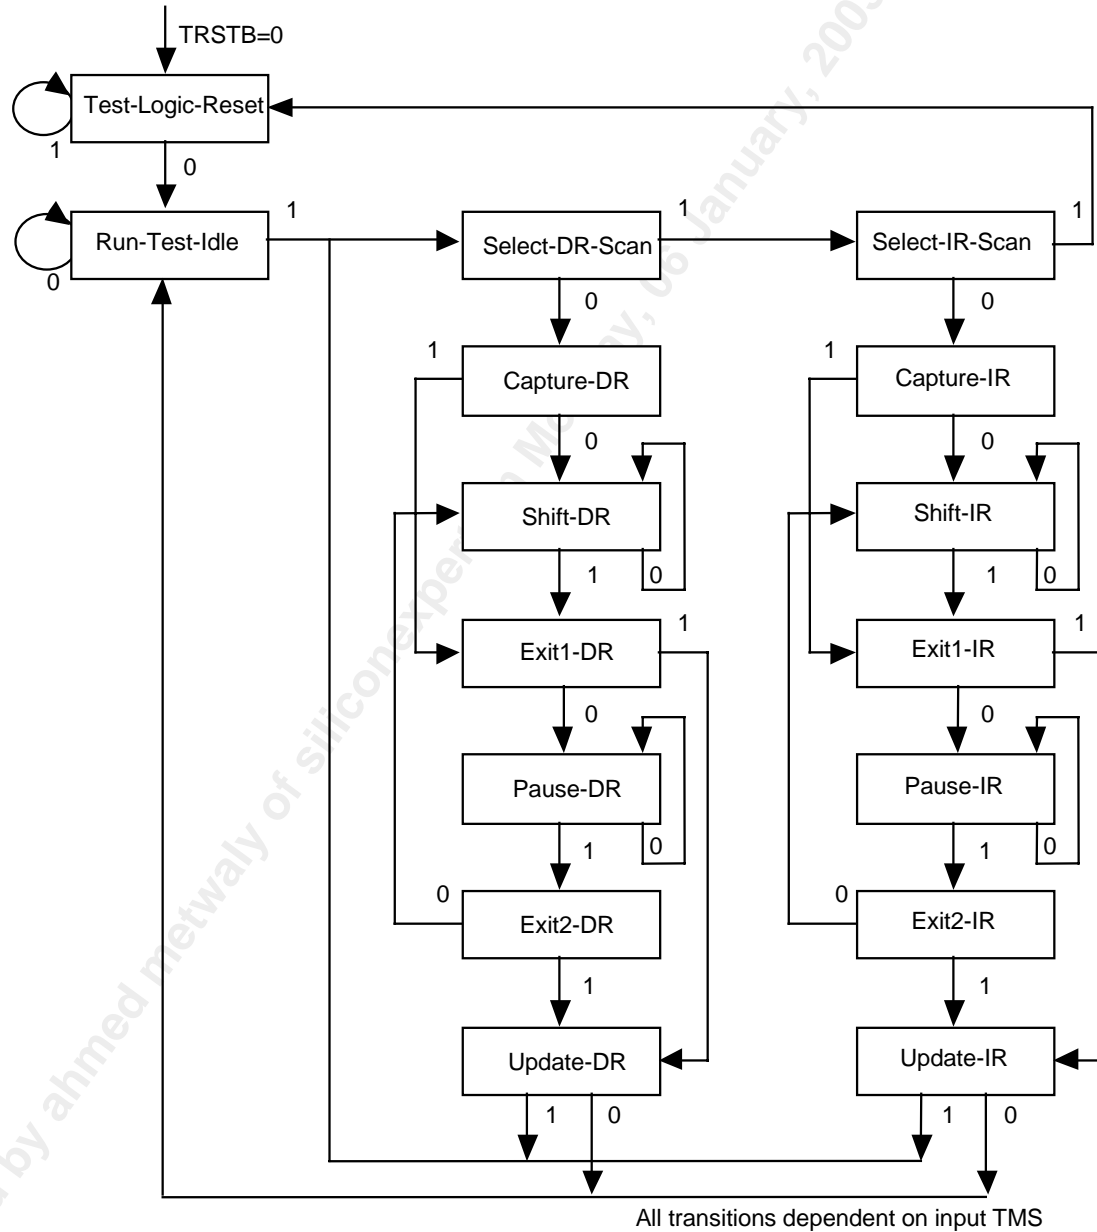

### Test-Logic-Reset

The test logic reset state is used to disable the TAP logic when the device is in normal mode operation. The state is entered asynchronously by asserting input, TRSTB. The state is entered synchronously regardless of the current TAP controller state by forcing input, TMS high for 5 TCK clock cycles. While in this state, the instruction register is set to the IDCODE instruction.

### Run-Test-Idle

The run/test/idle state is used to execute tests.

### Capture-DR

The capture data register state is used to load parallel data into the test data registers selected by the current instruction. If the selected register does not allow parallel loads or no loading is required by the current instruction, the test register maintains its value. Loading occurs on the rising edge of TCK.

### Shift-DR

The shift data register state is used to shift the selected test data registers by one stage. Shifting is from MSB to LSB and occurs on the rising edge of TCK.

### Update-DR

The update data register state is used to load a test register's parallel output latch. In general, the output latches are used to control the device. For example, for the EXTEST instruction, the boundary scan test register's parallel output latches are used to control the device's outputs. The parallel output latches are updated on the falling edge of TCK.

### Capture-IR

The capture instruction register state is used to load the instruction register with a fixed instruction. The load occurs on the rising edge of TCK.

### Shift-IR

The shift instruction register state is used to shift both the instruction register and the selected test data registers by one stage. Shifting is from MSB to LSB and occurs on the rising edge of TCK.

### Update-IR

The update instruction register state is used to load a new instruction into the instruction register. The new instruction must be scanned in using the Shift-IR state. The load occurs on the falling edge of TCK.

The Pause-DR and Pause-IR states are provided to allow shifting through the test data and/or instruction registers to be momentarily paused.

## Boundary Scan Instructions

The following is a description of the standard instructions. Each instruction selects a serial test data register path between input, TDI and output, TDO.

### BYPASS

The bypass instruction shifts data from input, TDI to output, TDO with one TCK clock period delay. The instruction is used to bypass the device.

### EXTEST

The external test instruction allows testing of the interconnection to other devices. When the current instruction is the EXTEST instruction, the boundary scan register is placed between input, TDI and output, TDO. Primary device inputs can be sampled by loading the boundary scan register using the Capture-DR state. The sampled values can then be viewed by shifting the boundary scan register using the Shift-DR state. Primary device outputs can be controlled by loading patterns shifted in through input TDI into the boundary scan register using the Update-DR state.

### SAMPLE

The sample instruction samples all the device inputs and outputs. For this instruction, the boundary scan register is placed between TDI and TDO. Primary device inputs and outputs can be sampled by loading the boundary scan register using the Capture-DR state. The sampled values can then be viewed by shifting the boundary scan register using the Shift-DR state.

### IDCODE

The identification instruction is used to connect the identification register between TDI and TDO. The device's identification code can then be shifted out using the Shift-DR state.


### STCTEST

The single transport chain instruction is used to test out the TAP controller and the boundary scan register during production test. When this instruction is the current instruction, the boundary scan register is connected between TDI and TDO. During the Capture-DR state, the device identification code is loaded into the boundary scan register. The code can then be shifted out of the output, TDO, using the Shift-DR state.


## Boundary Scan Cells

In the following diagrams, CLOCK-DR is equal to TCK when the current controller state is SHIFT-DR or CAPTURE-DR, and unchanging otherwise. The multiplexer in the center of the diagram selects one of four inputs, depending on the status of select lines G1 and G2. The ID Code bit is as listed in the Boundary Scan Register table in the JTAG Test Port section 11.2.

**Figure 17 Input Observation Cell (IN\_CELL)**

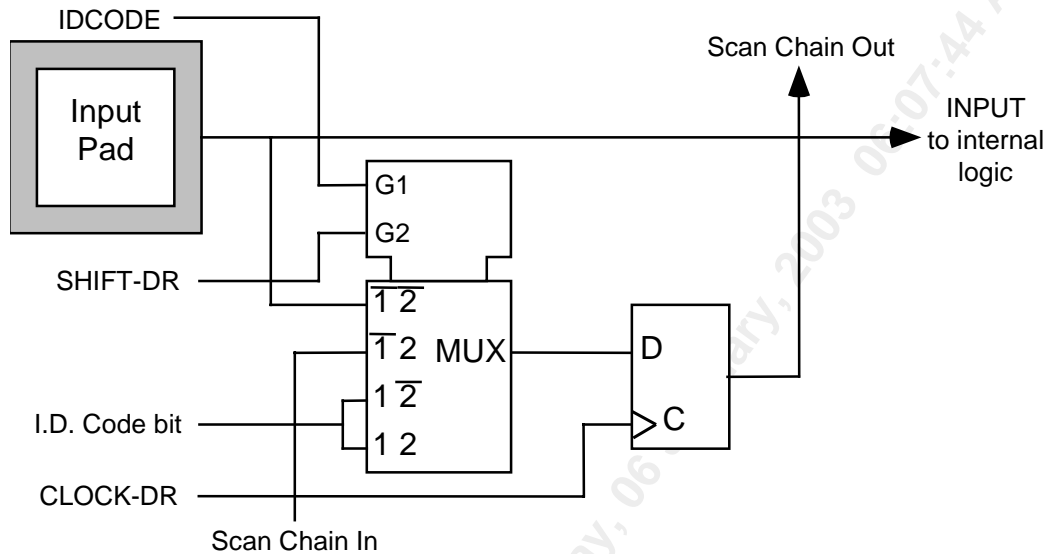


**Figure 18 Output Cell (OUT\_CELL) or Enable Cell (ENABLE)**

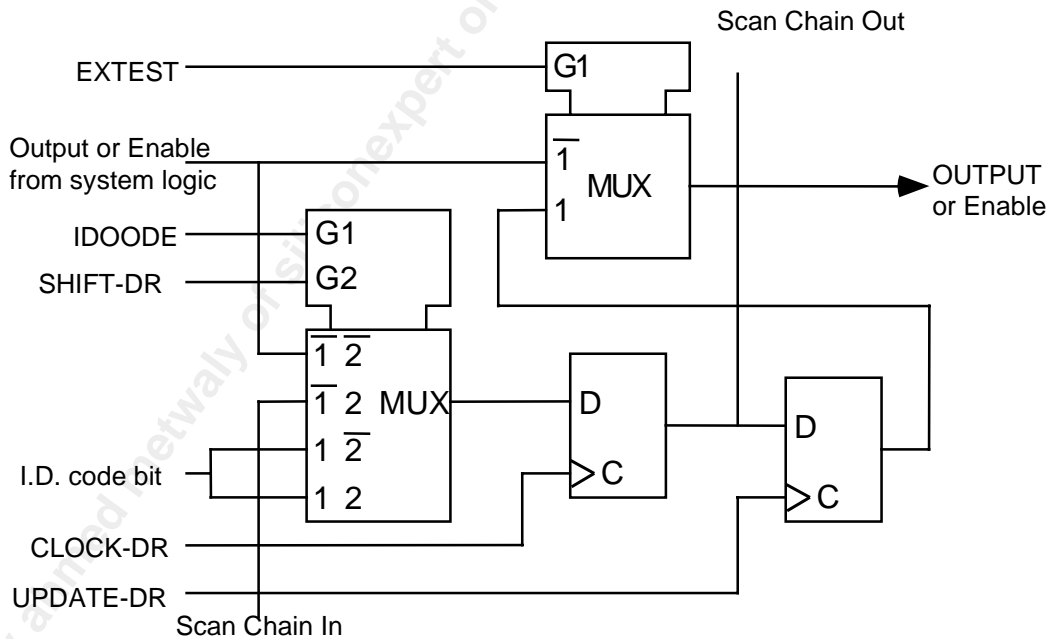




**Figure 19 Bidirectional Cell (IO\_CELL)**

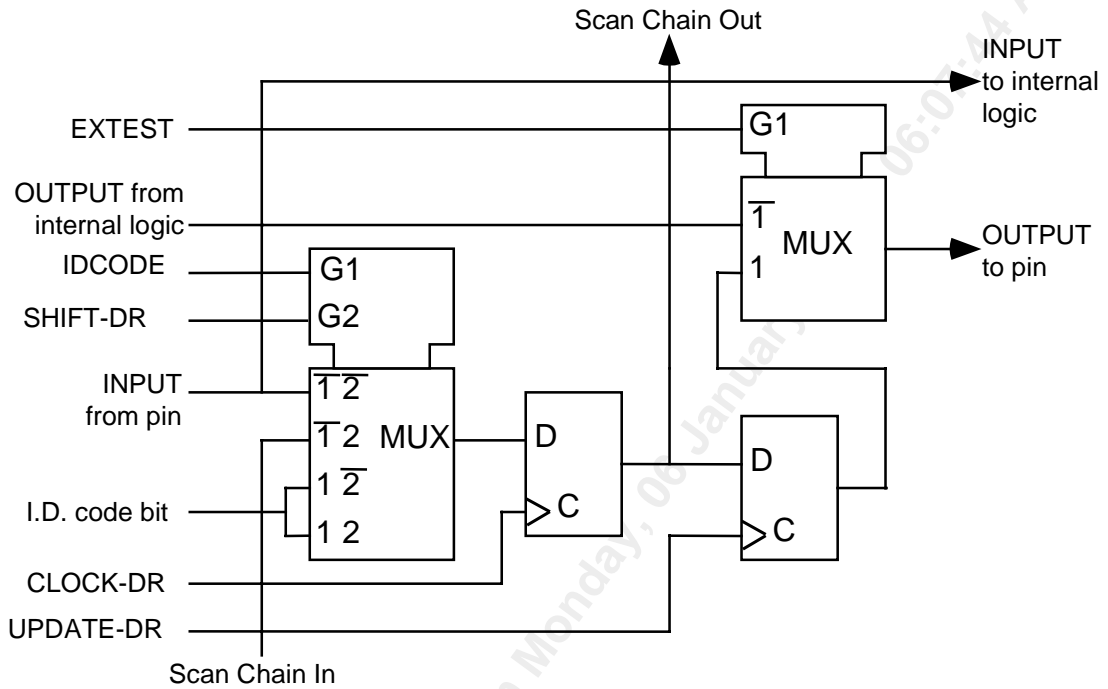

**Figure 20 Layout of Output Enable and Bidirectional Cells**

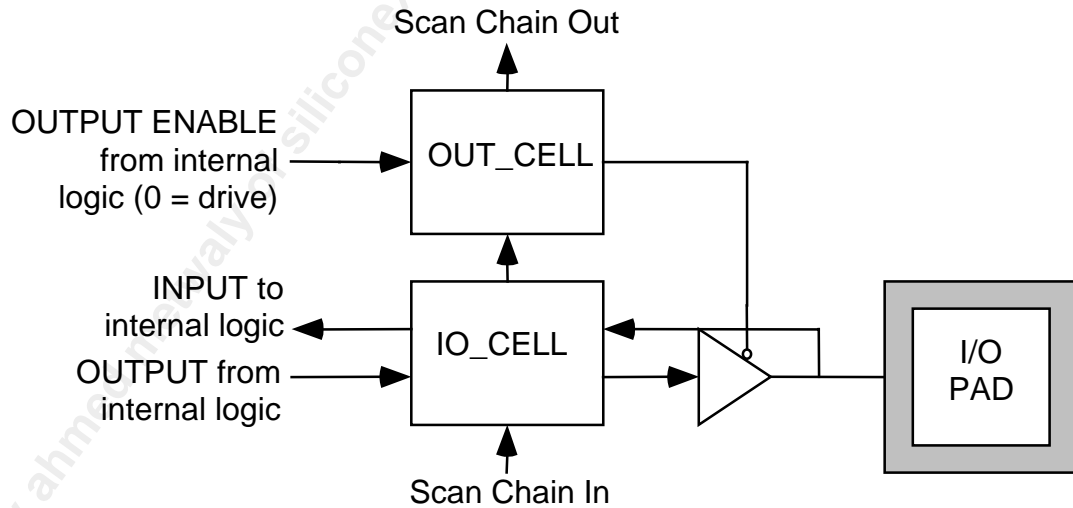

## 13 Functional Timing

### 13.1 SBI BUS Interface Timing

Figure 21 SBI BUS Functional Timing


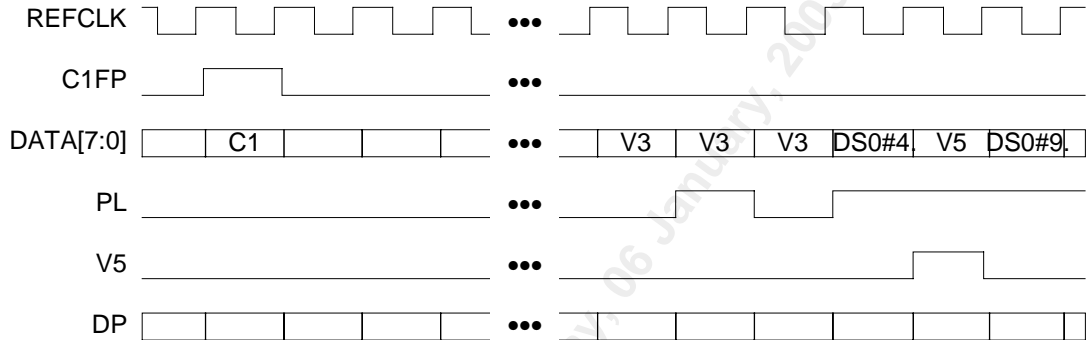


Figure 21 illustrates the operation of the SBI Bus, using a negative justification on the second to last V3 octet as an example. The justification is indicated by asserting PL high during the V3 octet. The timing diagram also shows the location of one of the tributaries by asserting V5 high during the V5 octet.

Note – the SBI ADD and DROP busses operate in an identical manner. Signal names on the ADD bus have an A prepended to the names shown in Figure 21 (e.g, AC1FP, ADATA[7:0], etc.) and those on the DROP bus have an D prepended to them (e.g, DC1FP, DDATA[7:0], etc.)


### 13.2 Line Code Violation Insertion

Figure 22 B8ZS Line Code Violation Insertion

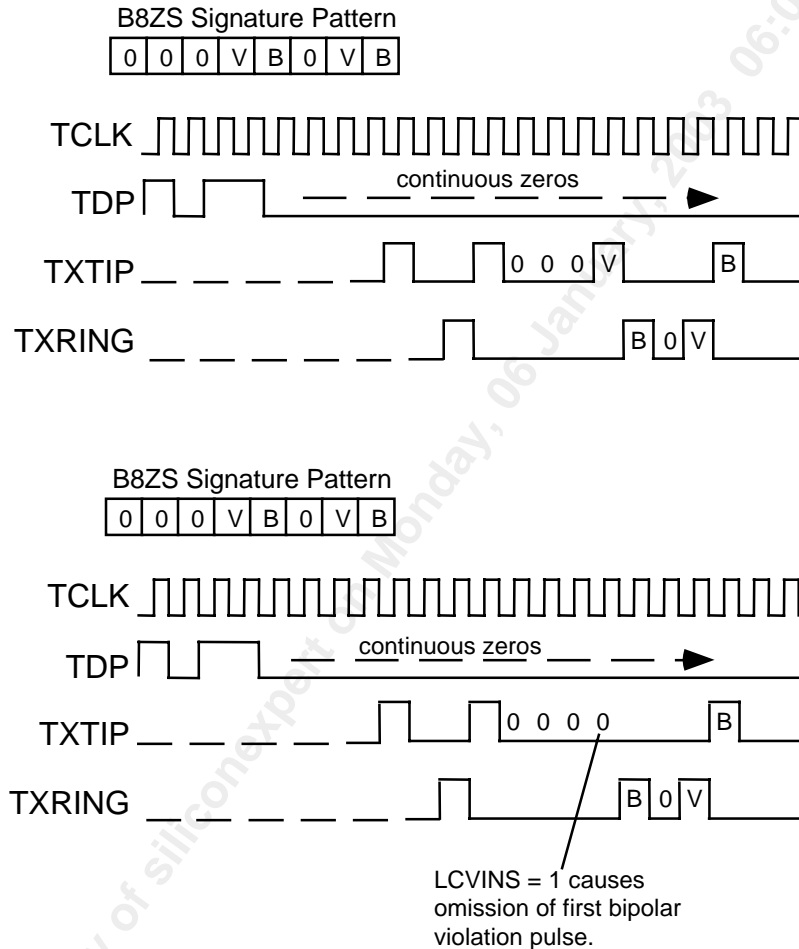


The effect of setting the LCVINS bit of the Line Interface Diagnostics register is shown in Figure 22. TXTIP[X] and TXRING[X] have been shown as square NRZ pulses for illustrative purposes. Setting LCVINS to a logic 1 generates one line code violation and 3 bit errors by causing the omission of the first line code violation pulse when a string of 8 consecutive zeros occurs in the unipolar serial transmit data stream. To generate another line code violation, the LCVINS bit must be reset to logic 0 and then set to logic 1 again. Note the Serial Tx Clock and Data signals are internally generated from the SBI.

**Figure 23 HDB3 Line Code Violation Insertion**

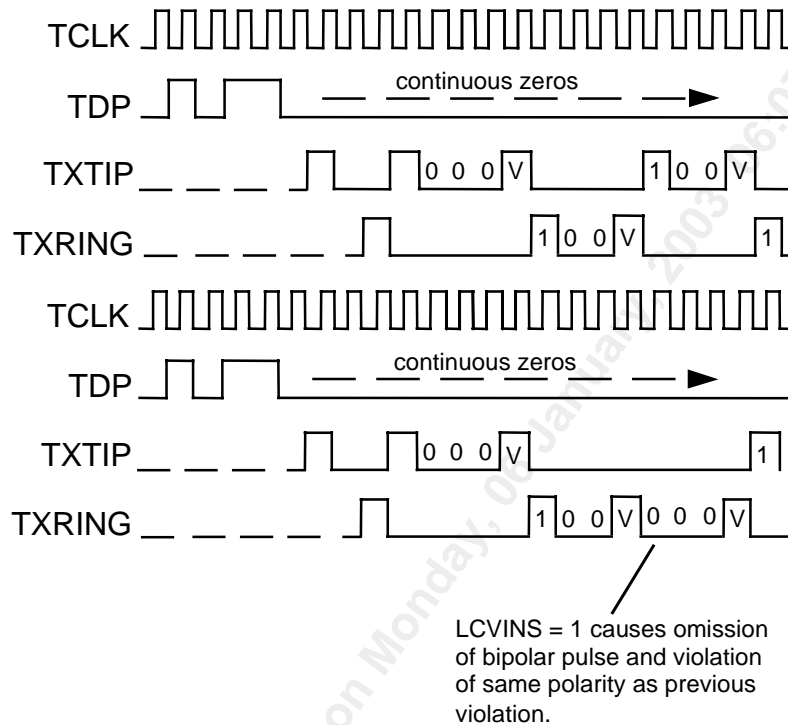

The effect of setting the LCVINS bit of the Line Interface Diagnostics register is shown in Figure 23. TXTIP[X] and TXRING[X] have been shown as square NRZ pulses for illustrative purposes. Setting LCVINS to a logic 1 generates one line code violation by causing the omission of a bipolar pulse and hence a bipolar violation pulse of the same polarity as the previous bipolar violation pulse when a string of 4 consecutive zeros occurs in the unipolar serial transmit data stream. To generate another line code violation, the LCVINS bit must be reset to logic 0 and then set to logic 1 again. Note the Serial Tx Clock and Data signals are internally generated from the SBI.

**Figure 24 AMI Line Code Violation Insertion**

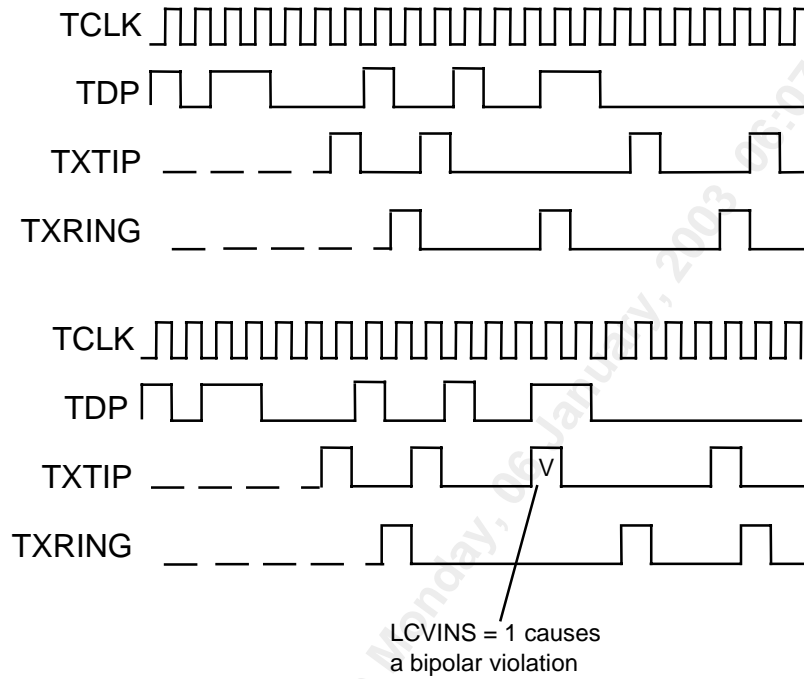

The effect of setting the LCVINS bit of the Line Interface Diagnostics register is shown in Figure 24. TXTIP[X] and TXRING[X] have been shown as square NRZ pulses for illustrative purposes. Setting LCVINS to a logic 1 generates one line code violation by causing the next pulse to be of the same polarity as the previous pulse. Subsequent pulses will be of alternate polarity. To generate another line code violation, the LCVINS bit must be reset to logic 0 and then set to logic 1 again. Note the Serial Tx Clock and Data signals are internally generated from the SBI.

### 13.3 Alarm Interface

Figure 25 LOS Alarm Serial Output

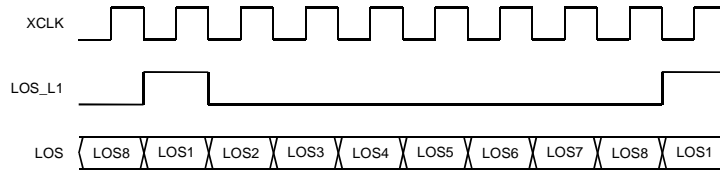


Figure 25 shows the operation of the Alarm Interface. The LOS status of the 8 LIU octants is output continuously in a serial format with a marker signal LOS\_L1 to indicate the presence of the LOS status for LIU #1.

## 14 Absolute Maximum Ratings

Maximum ratings are the worst case limits that the device can withstand without sustaining permanent damage. They are not indicative of normal mode operation conditions.

**Table 33 Absolute Maximum Ratings**

Ambient Case Temperature under Bias	-40°C to +85°C
Storage Temperature	-40°C to +125°C
Supply Voltage $V_{DDall33}$ <sup>1</sup>	-0.3V to +4.6V
Supply Voltage $V_{DD1V8}$	-0.3V to +3.6V
Voltage on Any Pin	-0.3V to $V_{DDall33} + 0.3V$
Static Discharge Voltage	±1000V
Latch-Up Current	±100mA
DC Input Current	±20mA
Lead Temperature	+230°C
Junction Temperature	+150°C

Notwithstanding the values in the above table 3.3V power supplies must always be at a voltage greater than or equal to the 1.8V power supplies.

<sup>1</sup> The OCTLIU-SH 3.3 Volt digital and analogue power pins are collectively referred to as  $V_{DDall33}$ .

## 15 D.C. Characteristics

$T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $V_{DD133} = 3.3\text{V} \pm 5\%$ ,  $V_{DD1V8} = 1.8\text{V} \pm 5\%$   
(Typical Conditions:  $T_A = 25^{\circ}\text{C}$ ,  $V_{DD133} = 3.3\text{V}$ ,  $V_{DD1V8} = 1.8\text{V}$ )

Table 34 D.C. Characteristics

Symbol	Parameter	Min	Typ	Max	Units	Conditions
VDD3V3, TAVD1, TAVD2, TAVD3, CAVD, RAVD1, RAVD2, QAVD	Power Supply	3.135	3.3	3.465	Volts	Note 5-
VDD1V8	Power Supply	1.71	1.8	1.89	Volts	Note 5-
VIL	Input Low Voltage			0.8	Volts	Guaranteed Input LOW Voltage
VIH	Input High Voltage	2.0			Volts	Guaranteed Input HIGH Voltage
VOL	Output or Bidirectional Low Voltage		0.1	0.4	Volts	VDD = min, IOL = -6mA for LOS, LOS_L1, TDO; -8mA for others. Notes 3, 5
VOH	Output or Bidirectional High Voltage	2.4	2.7		Volts	VDD = min, IOH = 6mA for LOS, LOS_L1, TDO; 8mA for others. Notes 3, 5
VT+	Reset Input High Voltage	2.29	1.6		Volts	Applies to TTL Schmidt-triggered inputs (RSTB, TRSTB) only. Note 5-
VT-	Reset Input Low Voltage		1.1	0.8	Volts	Applies to TTL Schmidt-triggered inputs (RSTB, TRSTB) only. Note 5-
VTH	Reset Input Hysteresis Voltage		0.5		Volts	Applies to TTL Schmidt-triggered inputs (RSTB, TRSTB) only. Note 5-
IILPU	Input Low Current	+20	+99	+200	$\mu\text{A}$	VIL = GND. Notes 1, 3, 5
IIHPU	Input High Current	-10	0	+10	$\mu\text{A}$	VIH = VDD. Notes 1, 3, 5
IILPD	Input Low Current	-10	0	+10	$\mu\text{A}$	VIL = GND. Notes 4, 3, 5
IIHPD	Input High Current	-271.59 0	-155.5	-20	$\mu\text{A}$	VIH = VDD. Notes 4, 3, 5
IIL	Input Low Current	-240	0	+240	$\mu\text{A}$	VIL = GND. Notes 2, 3, 5
IIH	Input High Current	-240	0	+240	$\mu\text{A}$	VIH = VDD. Notes 2, 3, 5



Symbol	Parameter	Min	Typ	Max	Units	Conditions
CIN	Input Capacitance		5		pF	Excluding Package, Package Typically 2 pF. <a href="#">Note 5.</a>
COUT	Output Capacitance		5		pF	Excluding Package, Package Typically 2 pF. <a href="#">Note 5.</a>
CIO	Bidirectional Capacitance		5		pF	Excluding Package, Package Typically 2 pF. <a href="#">Note 5.</a>
IDDOP 3V3	3.3V Operating Current			463  775  430  529	mA	<p>Digital output pads loaded with max capacitance. Transmission of pattern containing 50% ones in T1 (550-660ft).</p> <p>Digital output pads loaded with max capacitance. Transmission of pattern containing 100% ones in T1 (550-660ft).</p> <p>Digital output pads loaded with max capacitance. Transmission of pattern containing 50% ones in E1 (120Ω).</p> <p>Digital output pads loaded with max capacitance. Transmission of pattern containing 100% ones in E1 (120Ω).</p> <p><a href="#">Note 5.</a></p>
IDDOP 1V8	1.8V Operating Current			54  56  73  74	mA	<p>Digital output pads loaded with max capacitance. Transmission of pattern containing 50% ones in T1 (550-660ft).</p> <p>Digital output pads loaded with max capacitance. Transmission of pattern containing 100% ones in T1 (550-660ft).</p> <p>Digital output pads loaded with max capacitance. Transmission of pattern containing 50% ones in E1 (120Ω).</p> <p>Digital output pads loaded with max capacitance. Transmission of pattern containing 100% ones in E1 (120Ω).</p>

Symbol	Parameter	Min	Typ	Max	Units	Conditions
	Net power (power dissipated by OCTLIU-SH)		1.21	4.32	W	Digital output pads loaded with max capacitance. Transmission of pattern containing 50% ones in T1 (330-440ft).
			1.79	4.99		Digital output pads loaded with max capacitance. Transmission of pattern containing 100% ones in T1 (330-440ft).
			1.30	4.47		Digital output pads loaded with max capacitance. Transmission of pattern containing 50% ones in E1 (120Ω).
			1.52	4.68		Digital output pads loaded with max capacitance. Transmission of pattern containing 100% ones in E1 (120Ω).
						<a href="#">Note 5.</a>

**Notes on D.C. Characteristics:**

1. Input pin or bi-directional pin with internal pull-up resistor.
2. Input pin or bi-directional pin without internal pull-up or pull-down resistor
3. Negative currents flow into the device (sinking), positive currents flow out of the device (sourcing).
4. Input pin or bi-directional pin with internal pull-down resistor.
5. IDDOP3V3 includes the operating current of both the OCTLIU-SH device and the transmit line driver. Whereas, the "Net Power" is the power dissipated by the OCTLIU-SH device only.


## 16 Microprocessor Interface Timing Characteristics

( $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $V_{DD1I33} = 3.3\text{V} \pm 5\%$ ,  $V_{DD1V8} = 1.8\text{V} \pm 5\%$ )

**Table 35 Microprocessor Interface Read Access**

Symbol	Parameter	Min	Max	Units
tSAR	Address to Valid Read Set-up Time	10		ns
tHAR	Address to Valid Read Hold Time	5		ns
tSALR	Address to Latch Set-up Time	10		ns
tHALR	Address to Latch Hold Time	10		ns
tVL	Valid Latch Pulse Width	20		ns
tSLR	Latch to Read Set-up	0		ns
tHLR	Latch to Read Hold	5		ns
tPRD	Valid Read to Valid Data Propagation Delay		70	ns
tZRD	Valid Read Negated to Output Tri-state		20	ns
tZINTH	Valid Read Negated to Output Tri-state		50	ns

**Figure 26 Microprocessor Interface Read Timing**

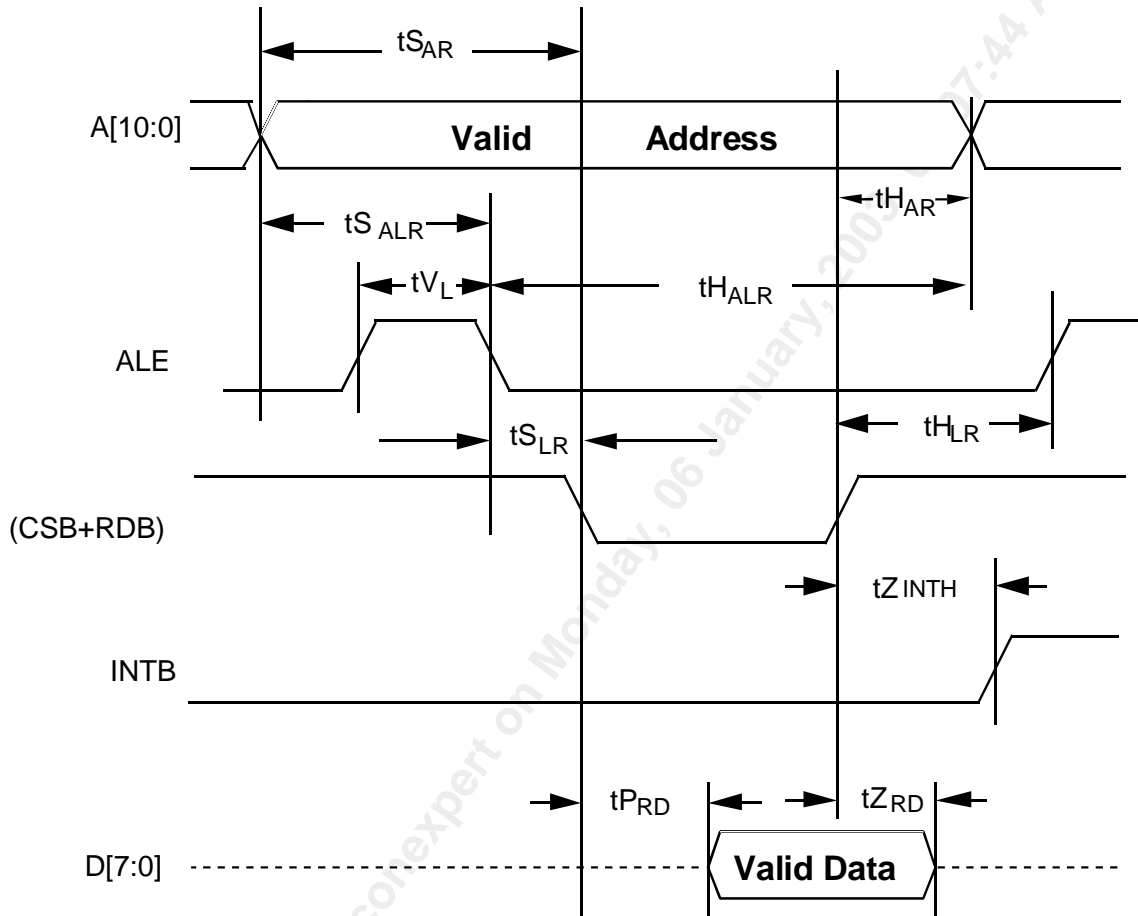


**Notes on Microprocessor Interface Read Timing:**

1. Output propagation delay time is the time in nanoseconds from the 1.4 Volt point of the reference signal to the 1.4 Volt point of the output.
2. Maximum output propagation delays are measured with a 100 pF load on the Microprocessor Interface data bus, (D[7:0]).
3. A valid read cycle is defined as a logical OR of the CSB and the RDB signals.
4. In non-multiplexed address/data bus architectures, ALE should be held high so parameters  $t_{SALR}$ ,  $t_{HALR}$ ,  $t_{VL}$ , and  $t_{SLR}$  are not applicable.
5. Parameter  $t_{HAR}$  is not applicable if address latching is used.
6. When a set-up time is specified between an input and a clock, the set-up time is the time in nanoseconds from the 1.4 Volt point of the input to the 1.4 Volt point of the clock.
7. When a hold time is specified between an input and a clock, the hold time is the time in nanoseconds from the 1.4 Volt point of the input to the 1.4 Volt point of the clock.

**Table 36 Microprocessor Interface Write Access**

Symbol	Parameter	Min	Max	Units
tSAW	Address to Valid Write Set-up Time	10		ns
tSDW	Data to Valid Write Set-up Time	20		ns
tSALW	Address to Latch Set-up Time	10		ns
tHALW	Address to Latch Hold Time	10		ns
tVL	Valid Latch Pulse Width	5		ns
tSLW	Latch to Write Set-up	0		ns
tHLW	Latch to Write Hold	5		ns
tHDW	Data to Valid Write Hold Time	5		ns
tHAW	Address to Valid Write Hold Time	5		ns
TVWR	Valid Write Pulse Width	40		ns

**Figure 27 Microprocessor Interface Write Timing**

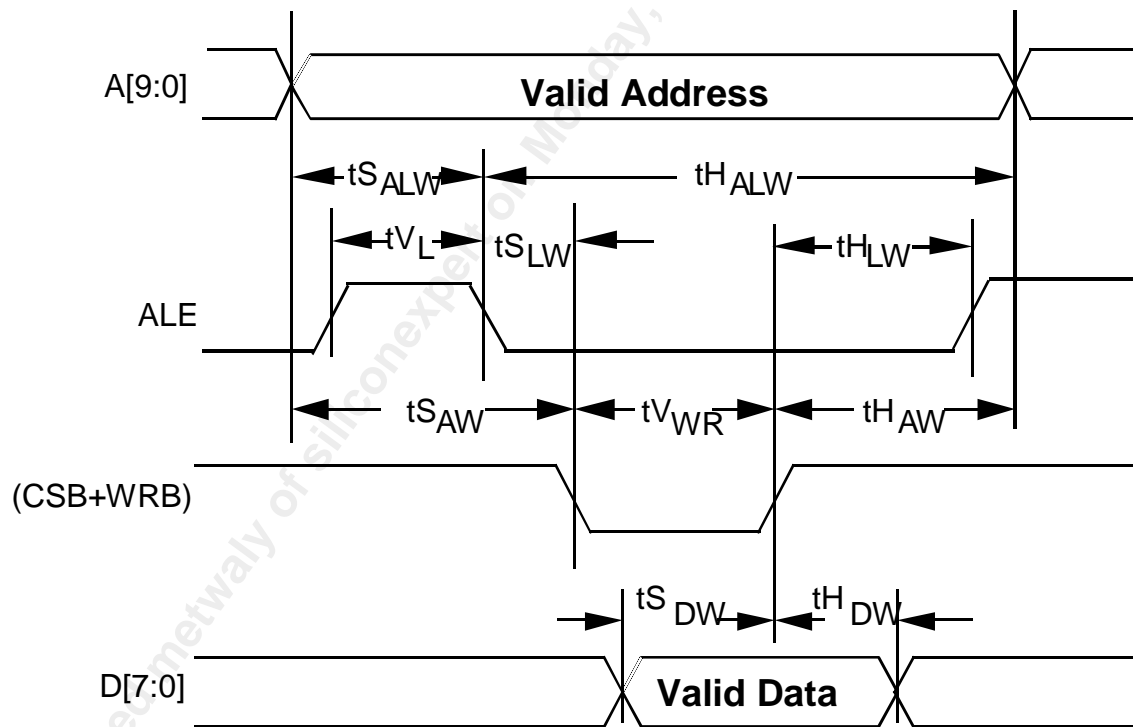

**Notes on Microprocessor Interface Write Timing:**

1. A valid write cycle is defined as a logical OR of the CSB and the WRB signals.
2. In non-multiplexed address/data bus architectures, ALE should be held high so parameters  $t_{SALW}$ ,  $t_{HALW}$ ,  $t_{VL}$ ,  $t_{SLW}$  and  $t_{HLW}$  are not applicable.
3. Parameter  $t_{HAW}$  is not applicable if address latching is used.

4. When a set-up time is specified between an input and a clock, the set-up time is the time in nanoseconds from the 1.4 Volt point of the input to the 1.4 Volt point of the clock.
5. When a hold time is specified between an input and a clock, the hold time is the time in nanoseconds from the 1.4 Volt point of the input to the 1.4 Volt point of the clock.

## 17 OCTLIU-SH Timing Characteristics


### 17.1 RSTB Timing (Figure 28)

( $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   $V_{DD133} = 3.3\text{V} \pm 5\%$ ,  $V_{DD1V8} = 1.8\text{V} \pm 5\%$ )

Table 37 RSTB Timing

Symbol	Description	Min	Max	Units
$t_{VRSTB}$	RSTB Pulse Width	100		ns

Figure 28 RSTB Timing

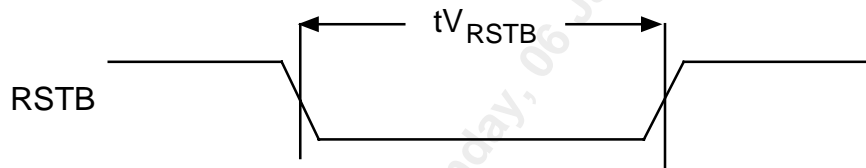


### 17.2 XCLK Input Timing (Figure 29)

Table 38 XCLK Input Timing

Symbol	Description	Min	Max	Units
$t_{XCLK}$	XCLK Frequency (1.544 MHz or 2.048 MHz $\pm 50\text{ppm}$ )	1.544 -50ppm	2.048 +50ppm	MHz
$t_{LXCLK}$	XCLK Low Pulse Width (Note 1)	160		ns
$t_{HXCLK}$	XCLK High Pulse Width (Note 1)	160		ns

Figure 29 XCLK Input Timing

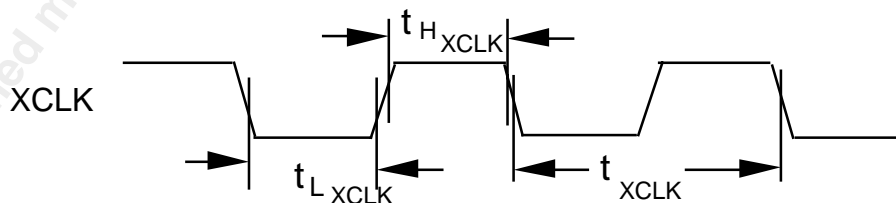


### 17.3 SBI Interface (Figure 30 to Figure 32)

( $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   $V_{DDall33} = 3.3\text{V} \pm 5\%$ ,  $V_{DD1V8} = 1.8\text{V} \pm 5\%$ )

**Table 39 Clocks and SBI Frame Pulse**

Symbol	Description	Min	Max	Units
	REFCLK Frequency	19.44 -50ppm	19.44 +50ppm	MHz
	REFCLK Duty Cycle	40	60	%
$T_{SC1FP}$	AC1FP, DC1FP Set-Up Time to REFCLK	4		ns
$T_{HC1FP}$	AC1FP, DC1FP Hold Time to REFCLK	0		ns
$T_{PC1FPOUT}$	REFCLK to C1FPOUT Valid	1	20	ns

**Figure 30 SBI Frame Pulse Timing**

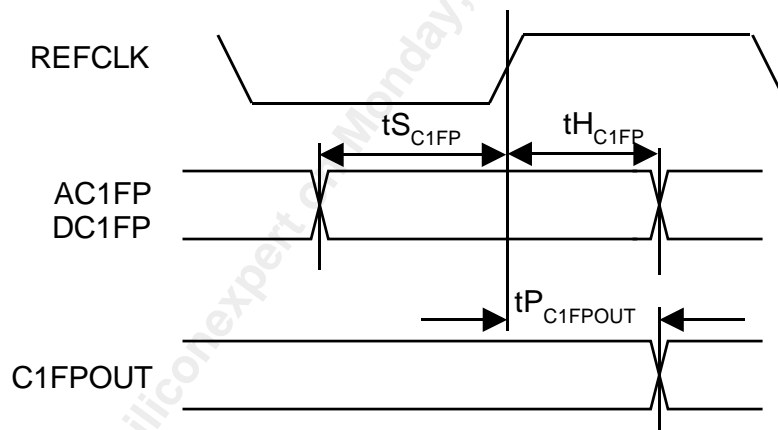

**Table 40 SBI ADD BUS**

Symbol	Description	Min	Max	Units
$t_{SSBIADD}$	All SBI ADD BUS Inputs Set-Up Time to REFCLK	4		ns
$t_{HSBIADD}$	All SBI ADD BUS Inputs Hold Time to REFCLK	0		ns



Figure 31 SBI ADD BUS Timing


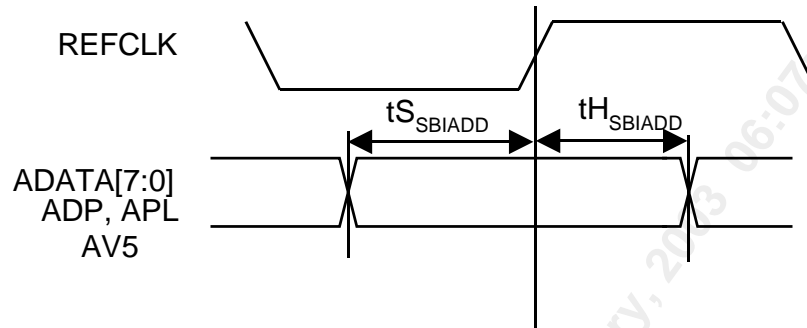


Table 41 SBI DROP BUS

Symbol	Description	Min	Max	Units
$t_{P\_DACTIVE}$	REFCLK to DACTIVE Valid	2	15	ns
$t_{P\_SBIDROP}$	REFCLK to All SBI DROP BUS Outputs (except DACTIVE) Valid	2	20	ns
$t_{Z\_SBIDROP}$	REFCLK to All SBI DROP BUS Outputs (except DACTIVE) Tristate	2	20	ns

Figure 32 SBI DROP BUS Timing

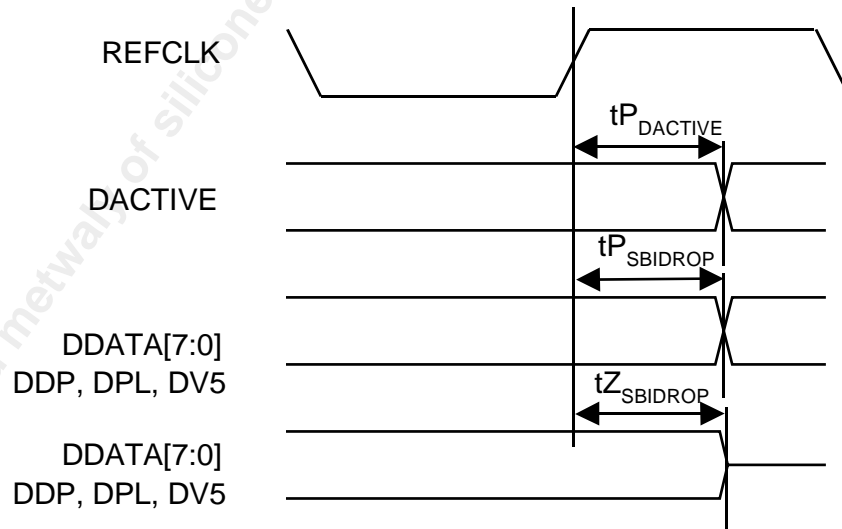


## 17.4 Alarm Interface (Figure 33)

( $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   $V_{DDall33} = 3.3\text{V} \pm 5\%$ ,  $V_{DD1V8} = 1.8\text{V} \pm 5\%$ )

Table 42 Alarm Interface

Symbol	Description	Min	Max	Units
$t_{PLOS}$	XCLK to LOS, LOS_L1 Output Prop. Time	-50	50	ns

Figure 33 Alarm Interface Timing

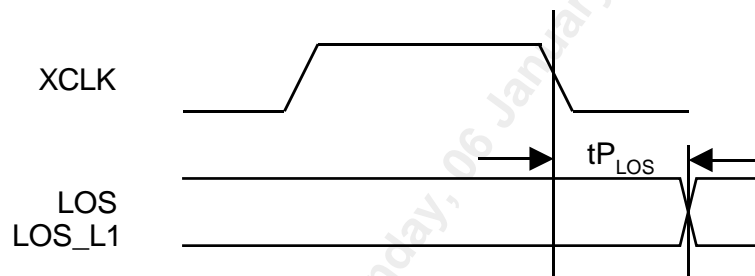


## 17.5 JTAG Port Interface (Figure 34)

( $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   $V_{DDall33} = 3.3\text{V} \pm 5\%$ ,  $V_{DD1V8} = 1.8\text{V} \pm 5\%$ )

Table 43 JTAG Port Interface

Symbol	Description	Min	Max	Units
	TCK Frequency		1	MHz
	TCK Duty Cycle	40	60	%
$t_{STMS}$	TMS Set-up time to TCK	50		ns
$t_{HTMS}$	TMS Hold time to TCK	50		ns
$t_{STDI}$	TDI Set-up time to TCK	50		ns
$t_{HTDI}$	TDI Hold time to TCK	50		ns
$t_{PTDO}$	TCK Low to TDO Valid	2	50	ns
$t_{VTRSTB}$	TRSTB Pulse Width	100		ns

Figure 34 JTAG Port Interface Timing

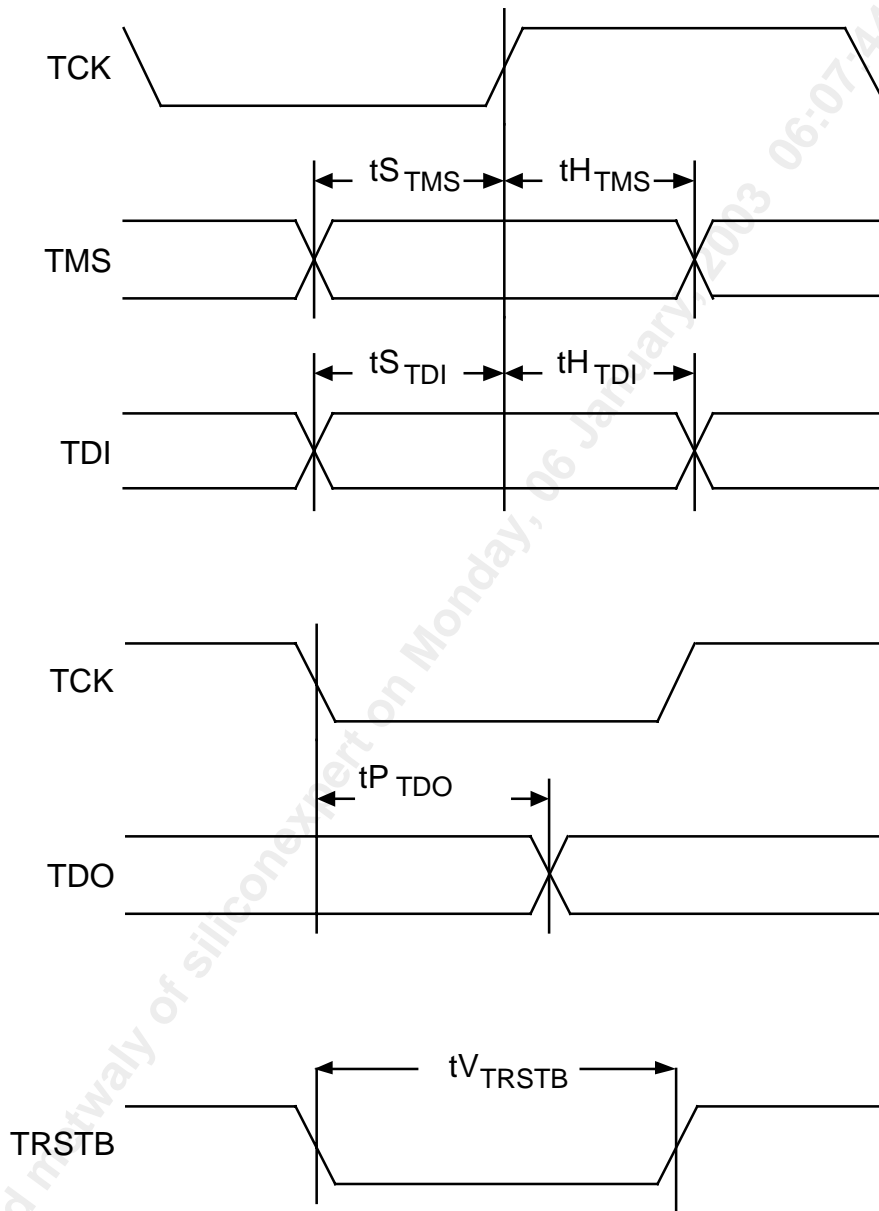

**Notes on OCTLIU-SH Timing:**

1. High pulse width is measured from the 1.4 Volt points of the rise and fall ramps. Low pulse width is measured from the 1.4 Volt points of the fall and rise ramps.
2. When a set-up time is specified between an input and a clock, the set-up time is the time in nanoseconds from the 1.4 Volt point of the input to the 1.4 Volt point of the clock.

3. When a hold time is specified between an input and a clock, the hold time is the time in nanoseconds from the 1.4 Volt point of the clock to the 1.4 Volt point of the input.
4. Output propagation delay time is the time in nanoseconds from the 1.4 Volt point of the reference signal to the 1.4 Volt point of the output.
5. Maximum output propagation delays are measured with a 100 pF load on the SBI DROP Bus outputs (except DACTIVE) and a 50 pF load on DACTIVE and all other outputs. Minimum output propagation delays are measured with a 0 pF load on the outputs.

## 18 Ordering and Thermal Information

**Table 44 Ordering Information**

Part No.	Description
PM4319-BI	288-pin Tape Super Ball Grid Array (TSBGA)

**Table 45 OCTLIU-SH Theta Jc**

PART NO.	CASE TEMPERATURE	Theta Jc
PM4319-BI	-40°C to +85°C	1.0 °C/W

**Table 46 OCTLIU-SH Junction Temperature**

PM4319-BI	Maximum Junction Temperature for Long Term Reliability	110 °C
-----------	--	--------


**Table 47 OCTLIU-SH Theta Ja vs. Airflow**

Part No.	Case Temperature	Theta J-A at 2.5 Watts	Conv	Forced Air (Linear Feet per Minute)				
				100	200	300	400	500
PM4319-BI	-40 °C to 85°C	Dense Board <sup>1</sup>	32.8	30.1	28.3	27.2	26.7	26.5
		JEDEC Board <sup>2</sup>	13.7	12.0	10.8	10.0	9.4	9.0

**Notes**

1. Dense Board is defined as a 3S3P board and consists of a 3x3 array of PM4319-BI devices located as close to each other as board design rules allow. All PM4319-BI devices are assumed to be dissipating maximum power. Theta J-A listed is for the device in the middle of the array.
2. JEDEC Board Theta J-A is the measured value for a single thermal device in the same package on a 2S2P board following EIA/JESD 51-3.

## 19 Mechanical Information

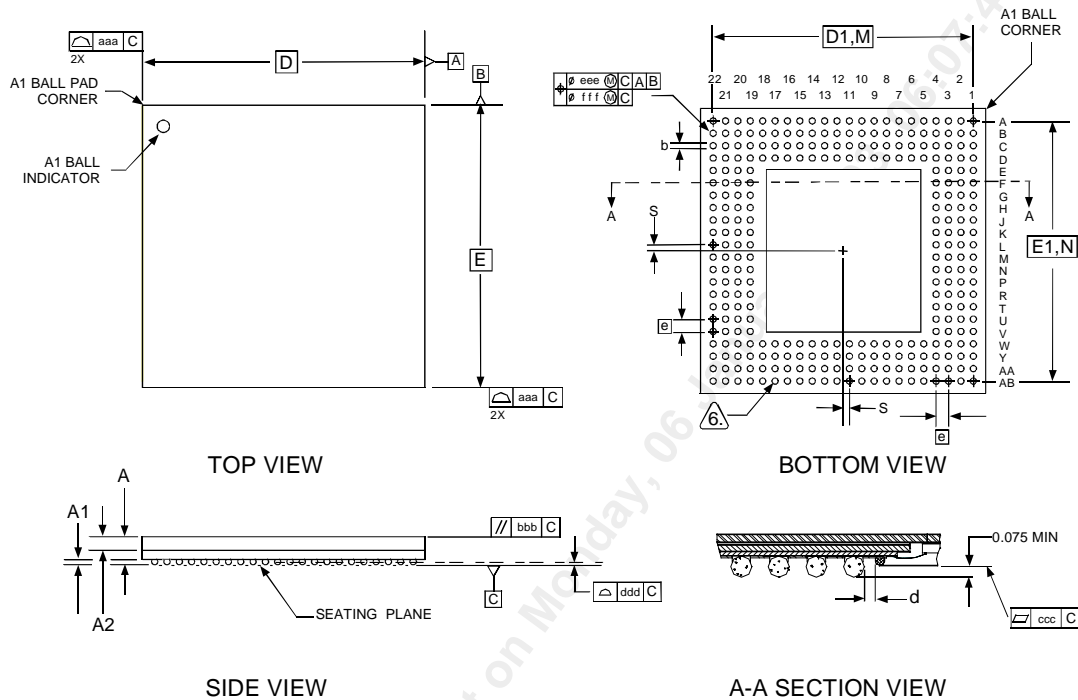

- NOTES: 1) ALL DIMENSIONS IN MILLIMETER.  
 2) DIMENSION aaa DENOTES PACKAGE BODY PROFILE.  
 3) DIMENSION bbb DENOTES PARALLEL.  
 4) DIMENSION ccc DENOTES FLATNESS.  
 5) DIMENSION ddd DENOTES COPLANARITY.  
 6) DIAMETER OF SOLDER MASK OPENING IS 0.550 MM (SMD).  
 7) PACKAGE COMPLIANT TO JEDEC REGISTERED OUTLINE MO-192, VARIATION AAJ-1.

PACKAGE TYPE : 288 TAPE SUPER BALL GRID ARRAY - TSBGA																		
BODY SIZE : 23 x 23 x 1.60 MM																		
Dim.	A	A1	A2	D	D1	E	E1	M,N	b	e	d	aaa	bbb	ccc	ddd	eee	fff	S
Min.	1.20	0.40	0.80	-	-	-	-	-	0.50	-	0.50	-	-	-	-	-	-	-
Nom.	-	0.50	0.91	23.00 BSC	21.00 BSC	23.00 BSC	21.00 BSC	22x22	0.63	1.00 BSC	-	-	-	-	-	-	-	-
Max.	1.60	0.60	1.00	-	-	-	-	-	0.70	-	-	0.20	0.25	0.20	0.20	0.30	0.10	0.50

## Notes

Downloaded by ahmed metwaly of siliconexpert on Monday, 06 January, 2003 06:07:44 AM