





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

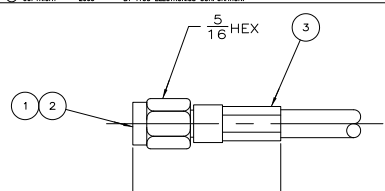

LOC	DIST	REV	DESCRIPTION	DATE	BY	APP'D
AJ	16	W1	REVISED PER ECO-06-01870R	29AUG2006	MC	JL
		W2	REVISED PER ECO-09-020932	04SEP09	KK	AEG

- 1. CENTER CONTACT: CRIMPING TOOL M22520/2-01; POSITIONER M22520/2-20; SELECTOR SETTING PER TABLE
- 2. FERRULE: CRIMPING TOOL M22520/5-01; DIE NUMBER OR HEX SIZE PER TABLE
- 3. PRODUCT IS DESIGNED TO MEET PRODUCT SPECIFICATION 108-1574.
- 4. BRIGHT NICKEL PLATE.
- 5. APPLIES TO 447647-5 ONLY.
- 6. COUPLING NUT MUST WITHSTAND 60 LB RETENTION FORCE. ALSO 15 IN-LB TORQUE WHEN MATED.
- 7. GOLD PLATE.
- 8. USE SELECTOR SETTING #7 FOR RG-142, 142A, 142B AND SELECTOR SETTING #6 FOR RG-400
- 9. INSTRUCTION SHEET: 408-4032
- 10. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

STATUS	DESCRIPTION	DIE	FINISH	MATERIAL	SPACER QTY=1	FERRULE QTY=1	CONTACT QTY=1	PLUG ASSY QTY=1	PART NUMBER
OBSOLETE	RG-174, 188 A, 316	DIE M22520/5-35 B OR .128X.400 HEX	#4	BRASS	9-446556-1	447869-2	447844-4	9-447647-1	
OBSOLETE	RG-142, 142 A, 142 B, RG-400	DIE M22520/5-11 A OR .213X.400 HEX	#8	BRASS	9-446556-0	443246-2	447844-1	9-447647-0	
OBSOLETE	RG-174, 188 A, 316	DIE M22520/5-35 B OR .128X.400 HEX	#4	BRASS	4-446556-1	447869-2	447844-6	1-447647-4	
OBSOLETE	BELDEN YR20621, CRIMPED/SOLDERED CONTACT	DIE M22520/5-11 A OR .213X.400 HEX	#5	BRASS	447863-1	4-446556-0	443246-2	447844-5	1-447647-3
OBSOLETE	RG-142, 142 A, 142 B, RG-400	DIE M22520/5-11 A OR .213X.400 HEX	#8	BRASS	3-446556-6	443246-2	447844-1	1-447647-2	
OBSOLETE	BELDEN YR20621, CRIMPED/SOLDERED CONTACT	DIE M22520/5-11 A OR .213X.400 HEX	#5	BRASS	447863-1	4-446556-4	443246-2	447844-7	1-447647-1
OBSOLETE	RG-55, 55 A, 55 B, 223	DIE M22520/5-11 A OR .213X.400 HEX	#7	BRASS	9-446556-3	447848-2	447844-1	1-447647-0	
OBSOLETE	RG-174, 188 A, 316	DIE M22520/5-35 B OR .128X.400 HEX	#4	BRASS	3-446556-3	447869-2	447844-4	447647-9	
OBSOLETE	RG-174 DB, RG-188 DB, RG-316 DB	DIE M22520/5-35 B OR .128X.400 HEX	#4	PASSIVATED STAINLESS STEEL	2-446556-4	447869-2	447844-3	447647-8	
OBSOLETE	RG-142, 142 A, 142 B, RG-400, CRIMPED/SOLDERED CONTACT	DIE M22520/5-11 A OR .213X.400 HEX	#8	PASSIVATED STAINLESS STEEL	3-446556-6	443246-2	447844-8	447647-7	
OBSOLETE	RG-316, CRIMPED/SOLDERED CONTACT	DIE M22520/5-35 B OR .128X.400 HEX	#4	PASSIVATED STAINLESS STEEL	9-446556-1	447869-2	447844-3	447647-6	
SUPERSEDED	BELDEN YR20621, CRIMPED/SOLDERED CONTACT	DIE M22520/5-11 A OR .213X.400 HEX	#5	PASSIVATED STAINLESS STEEL	447863-1	4-446556-4	443246-2	447844-2	447647-5
OBSOLETE	RG-188 Double Braid, 316 Double Braid	DIE M22520/5-35 B OR .128X.400 HEX	#4	BRASS	4-446556-3	447869-2	447844-4	447647-4	
	RG-174, 188 A, 316	DIE M22520/5-35 B OR .128X.400 HEX	#4	BRASS	9-446556-1	447869-2	447844-4	447647-3	
	RG-142, 142 A, 142 B, RG-400	DIE M22520/5-11 A OR .213X.400 HEX	#8	BRASS	9-446556-0	443246-2	447844-1	447647-2	
OBSOLETE	RG-58, 58 A/U, 58 B/U, 58 C/U	DIE M22520/5-11 A OR .213X.400 HEX	#5	BRASS	9-446556-2	443246-2	447844-1	447647-1	
	CABLE SIZE	2? DIE # OR HEX SIZE	1? SELECTOR SETTING	FINISH MATERIAL SHELL	④ SPACER QTY=1	③ FERRULE QTY=1	② CONTACT QTY=1	① PLUG ASSY QTY=1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DR: BRENT D. YOHN 1100193  
 OR: LANG LE 2700193  
 LANG LE 2700193  
 R. FISHER  
 PRODUCT SPEC: 108-1574  
 APPLICATION SPEC: -  
 WEIGHT: -  
 CUSTOMER DRAWING

Tyco Electronics Corporation  
 Harrisburg, PA 17105-3608

CONNECTOR, PLUG, SMA, HEX CRIMP, COMMERCIAL

SIZE: A2 00779 © 447647  
 SCALE: 1:1 SHEET: 1 of 1 REV: W2