THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

USC	DIST
AJ	16

REVISIONS

P	LTR	DESCRIPTION	DATE	EBR	APVD
	A	REVISED PER EC 0514-0150-05	04OCT2005	REH	JL

1. ZINC PER QQ-Z-363.
2. POLYMETHYLPENTENE, GENERAL PURPOSE.
3. PHOSPHOR BRONZE PER QQ-B-750.
4. BRASS PER ASTM-B-453.
5. BRASS PER ASTM-B-16.
6. NICKEL PLATE PER QQ-N-290, 3.81 µm [.000150] MINIMUM THICK.
7. TIN PLATE PER ASTM-B-545, 3.81 µm [.000150] MINIMUM THICK.
8. GOLD PLATE PER ASTM-B-488, 0.76 µm [.000030] MINIMUM THICK.
9. SEE INSTRUCTION SHEET 408-2769.

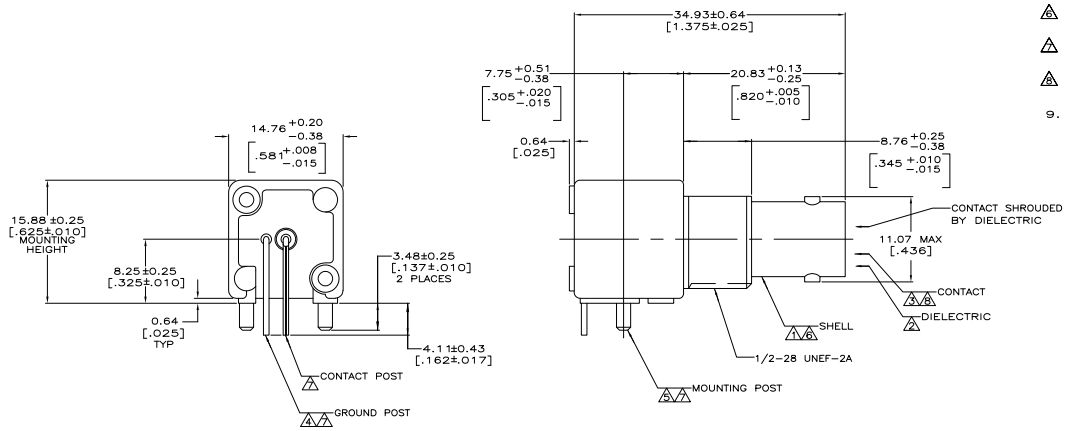

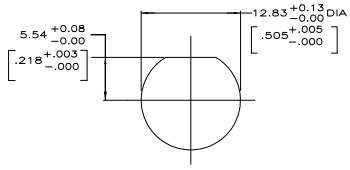

RECOMMENDED PANEL CUTOUT



PCB CONFIGURATION

5414409-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.5 [.02]
2 PLC ± 0.25 [.010]
3 PLC ± 0.10 [.004]
4 PLC ± –
ANGLES ± –

MATERIAL SEE NOTES 1 - 5

FINISH SEE NOTES 6 - 8

DRN	J. ALCORTA –	26APR2005
CHK	J. HAVENER	26APR2005
APVD	J. LIPPERT	26APR2005

PRODUCT SPEC: 108-12078
APPLICATION SPEC: –
WEIGHT: –

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME: JACK, RIGHT ANGLE, PCB 75 OHM, SERIES BNC –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-5414409	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV A

AMP 4805 REV 31MAR2000

Downloaded from Elcodis.com electronic components distributor