

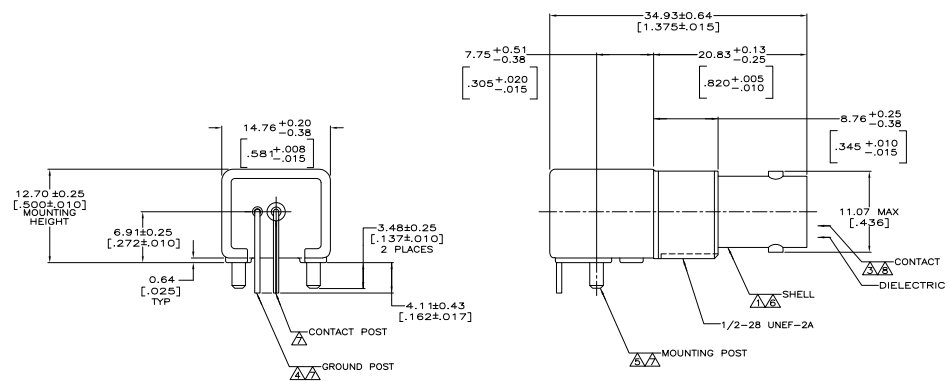


REV	DATE	DESCRIPTION	DATE	APPD
B	1			KWF
C		REVISED PER 0514-0184-04	10/20/04	JL



- △ ZINC PER QQ-Z-363.
  - △ POLYMETHYLPENTENE PER ASTM-D-1238.
  - △ PHOSPHOR BRONZE PER QQ-B-750.
  - △ BRASS PER ASTM-B-453.
  - △ BRASS PER ASTM-B-16.
  - △ NICKEL PLATE PER QQ-N-295, 3.81 μm [.000150] MINIMUM THICK.
  - △ TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
  - △ GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUM THICK.
  - △ POLYPHTHALAMIDE, PPA, GENERAL PURPOSE.
10. SEE INSTRUCTION SHEET 2769.



DISOLETE	△	1274084-2
	△	1274084-1
DIELECTRIC MATERIAL		PART NUMBER

DO NOT SCALE PRINT: UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON 1 2 PL DEC 8 020 [006] 3 DEC 8 - ANGLES MATERIAL: SEE NOTES 1 THRU 5 & 9 FINISH: SEE NOTES 6 THRU 8	DR 7-10-98 J. LIPPERT CHK 7-10-98 J. LIPPERT APPD 7-10-98 J. LIPPERT PRODOT SPEC 108-12078	AMP Incorporated Harrisburg, PA 17105-3608
NAME	JACK, RIGHT ANGLE, PCB 75 OHM, SERIES BNC	PART NO
SIZE	00779	DRAWING NO
WEIGHT	-	SHEET
SCALE	4:1	10F 1