

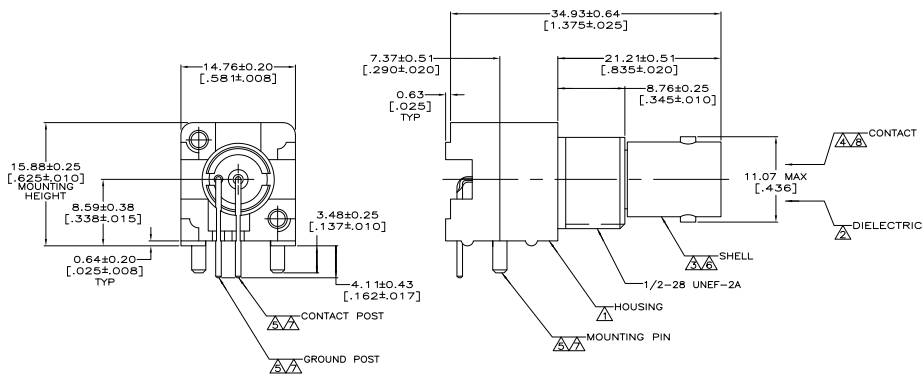


THIS DRAWING IS UNPUBLISHED. REPRODUCED FOR YOUR INFORMATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHKD
AJ	16			
H		REVISED PER ECO-10-004980		



- ▲ POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-0 RATED, COLOR:NATURAL
- ▲ POLYMETHYLPENTENE, GENERAL PURPOSE.
- ▲ ZINC PER QQ-Z-363.
- ▲ BERYLLIUM COPPER PER QQ-C-530.
- ▲ BRASS PER ASTM-B-453.
- ▲ NICKEL PLATE PER QQ-N-290 3.81 μm [.000150] MINIMUM THICK.
- ▲ TIN PLATE PER ASTM-B-545 3.81 μm [.000150] MINIMUM THICK.
- ▲ GOLD PLATE PER MIL-G-45204 .76 μm [.000030] MINIMUM THICK.
- 9. SEE INSTRUCTION SHEET 2769.



414459-1
PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		REVISED	10-18-80	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DESIGNED BY	APPROVED BY	DATE	DATE	
DIMENSIONS: A B C D E F G H I J K L M N O P Q R S T U V W X Y Z UNITS: INCHES (10) MILLIMETERS (10)	DIMENSIONS LISTED: A B C D E F G H I J K L M N O P Q R S T U V W X Y Z UNITS: INCHES (10) MILLIMETERS (10)	DRAWN BY: A1 CHECKED BY: G DATE: 10-18-80	DATE: 10-18-80 DRAWING NO: 414459 REV: 1	JACK, RIGHT ANGLE, PCB, 75 OHM, BNC
SEE NOTES 1 - 5		SEE NOTES 6 - 8		CUSTOMER DRAWING SIZE: 4.1 INCHES SHEET: 1 OF 1