

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	MIN	APPD
AJ	16	K		REVISED PER ECO-07-002853	21MAR2007	DW	JL

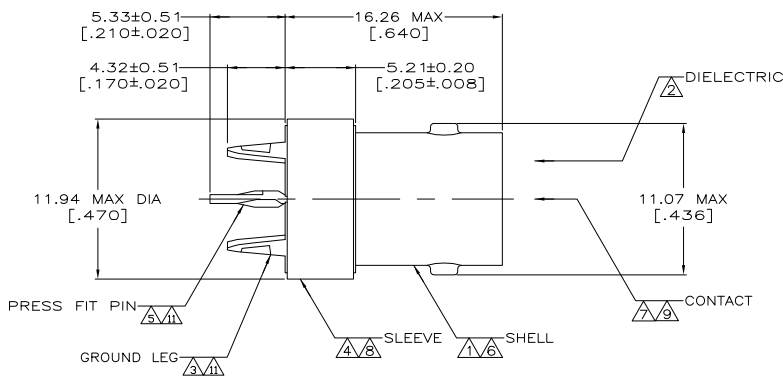

- △ ZINC PER QQ-Z-363.
- △ PTFE PER MIL-P-19468.
- △ COPPER-IRON ALLOY PER ASTM-B-465.
- △ COPPER PER QQ-C-576.
- △ COPPER-NICKEL ALLOY PER ASTM-B-122.
- △ NICKEL PLATE PER QQ-N-290  
3.81 μm [.000150] MINIMUM THICK.
- △ GOLD PLATE PER MIL-G-45204  
0.76 μm [.000030] MINIMUM THICK.
- △ TIN PLATE PER ASTM-B-545,  
2.54 μm [.000100] MIN THICK.
- △ BERYLLIUM COPPER PER ASTM-B-643.
- 10. INTERFACE DIMENSIONS PER LUCENT SPEC WP-92009.
- △ TIN-LEAD PLATE PER ASTM-B-545,  
2.54 μm [.000100] MIN THICK.
- 12. CONNECTOR PRESS FIT IS DESIGNED TO PROVIDE 100 LB. MINIMUM AXIAL RETENTION TO PCB COMPLIANT WITH TYCO APPLICATION SPEC 114-12001. AS A RESULT, DEFORMATION OF PLATED THROUGH HOLES WILL OCCUR. CUSTOMER VALIDATION AND ACCEPTANCE OF THIS DEFORMATION IS RECOMMENDED PRIOR TO SPECIFYING USE OF THIS PRODUCT.

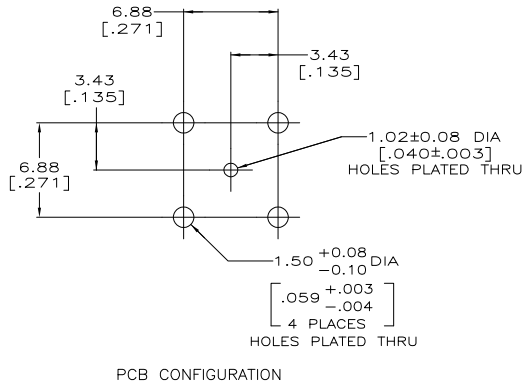

414088-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIM J. LIPPERT 4-29-91 OK A. GABANY 5-9-91 NAME PRODUCT SPEC APPLICATION SPEC WEIGHT FINISH	<b>Tyco Electronics</b> Tyco Electronics Corporation Harrisburg, PA 17105-3608 JACK, PCB, HIGH RETENTION PRESS FIT, 75 OHM, BNC SIZE CASE CODE DRAWING NO A2 00779 C=414088 RESTRICTED TO
DIMENSIONS: INCHES	0 PLC ± - 1 PLC ± - 2 PLC ± 0.05 [.002] 3 PLC ± - 4 PLC ± - ANGLES ± -	NOTES 1-5,9 NOTES 6-8	CUSTOMER DRAWING SCALE 5:1 SHEET 1 of 1 REV K

AMP 1471-9 REV 31MM2000

414088

A