


AS3935 Demo Kit

Quick Start Manual

Demo Kit

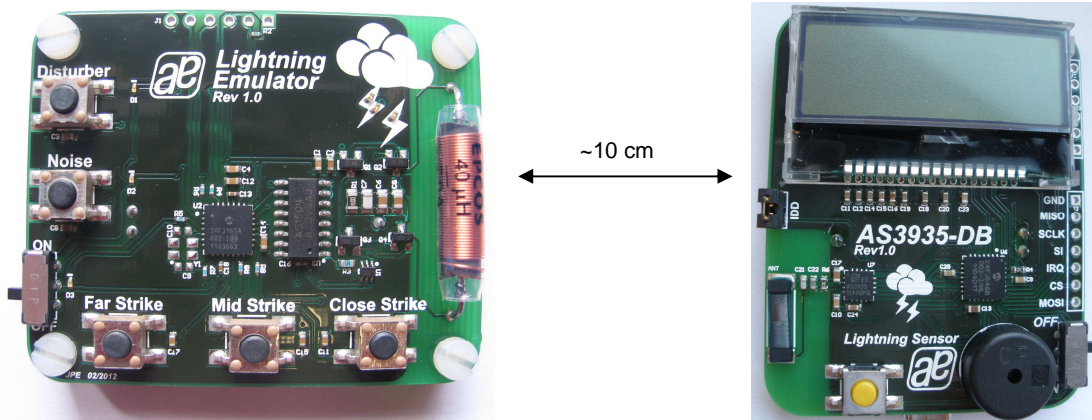

Procedure

1. Insert the 3V battery (CR2032) in the battery holder on the AS3935 demo board.
2. Insert a 3V battery in the battery holder on the Lightning Emulator.
3. Position the lightning emulator and the AS3935 demo board in such a way that both antennas are in parallel to each other. Keep a distance of 10-15 cm between both boards.
4. Turn on the AS3935 Lightning Sensor via the ON/OFF – switch. When you switch on the board you will see on the LCD the austriamicrosystems logo followed by the LCO and the RCO calibration. After successful calibration the AS3935 goes into sense mode awaiting a lightning.
5. Turn on the Lightning Emulator via the ON/OFF – switch. When turned on, the blue LED will be flashing up once a second.
6. Now you can start pressing the switches, far strike, mid strike and close strike on the Emulator, simulating a lightning which will be detected by the sensor. The display on the AS3935-DB will flash up and highlight “Lightning detected” and the distance to the head of the storm. Furthermore the sensor informs if the storm is approaching or departing via the internal statistical analysis. Lightning will be alarmed with the buzzer signal.
7. The internal statistics can be cleared via a long-press (>1s) on the yellow button of the AS3935-DB.
8. If the Disturber button is pressed, the AS3935 demo board will show “Disturber detected”.
9. If the Noise button is pressed, the AS3935 demo board will show “Noise Level too high”.
10. It is possible to monitor all lightning events in a history. All lightning and its point of time will be stored in a volatile memory. The actual time can be seen on the LCD applying a short press on the yellow button. The time can be adjusted via the GUI, as well as the history read out and deleted.

Copyright

Copyright © 1997-2012, austriamicrosystems AG, Tobelbaderstraße 30, 8141 Unterpremstätten - Graz, Austria - Europe. Trademarks Registered ®. All rights reserved. The material herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner.

All products and companies mentioned are trademarks or registered trademarks of their respective companies.

Disclaimer

Devices sold by austriamicrosystems AG are covered by the warranty and patent indemnification provisions appearing in its Term of Sale. austriamicrosystems AG makes no warranty, express, statutory, implied, or by description regarding the information set forth herein or regarding the freedom of the described devices from patent infringement. austriamicrosystems AG reserves the right to change specifications and prices at any time and without notice. Therefore, prior to designing this product into a system, it is necessary to check with austriamicrosystems AG for current information. This product is intended for use in normal commercial applications. Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications, such as military, medical life-support or life-sustaining equipment are specifically not recommended without additional processing by austriamicrosystems AG for each application. For shipments of less than 100 parts the manufacturing flow might show deviations from the standard production flow, such as test flow or test location.

The information furnished here by austriamicrosystems AG is believed to be correct and accurate. However, austriamicrosystems AG shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interruption of business or indirect, special, incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data herein. No obligation or liability to recipient or any third party shall arise or flow out of austriamicrosystems AG rendering of technical or other services.

This product is intended to be used as an early warning indicator for lightning related storms. It does not guarantee accuracy or predict exact strike locations. By using the part, the user shall be aware that s/he cannot just rely on the indication in order to prevent accidents caused by lightning strikes. austriamicrosystems explicitly states that the user must follow the generally known and recommended instructions on how to behave in the event of lightning strikes. In no event shall austriamicrosystems or its suppliers be liable for any direct, indirect, incidental, special, exemplary or consequential damages (including, but not limited to procurement of substitute goods or services, loss of use, data or profits, or business interruption) arising out of user's disregard to such warnings and instructions.



Contact Information

Headquarters

austriamicrosystems AG
Tobelbaderstraße 30
A-8141 Unterpremstätten - Graz, Austria
T. +43 (0) 3136 500 0
F. +43 (0) 3136 5692

For Sales Offices, Distributors and Representatives, please visit:
<http://www.austriamicrosystems.com/contact>