THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
AJ	16

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECO-06-020711	11DEC2006	KS	KW

1. BRASS PER ASTM-B-16.
2. TEFLON PER ASTM-D-1710.
3. BERYLLIUM COPPER PER ASTM-B-196.
4. NICKEL PLATE PER QQ-N-290.
5. GOLD PLATE PER ASTM-B-488.
6. APPLY FORCE IN THESE AREAS TO ASSEMBLE CONNECTOR INTO PC BOARD.
7. 2-56 UNC-2B.
8. PHOS BRONZE PER ASTM-B-139.
9. TIN-LEAD PLATE PER ASTM-B-545

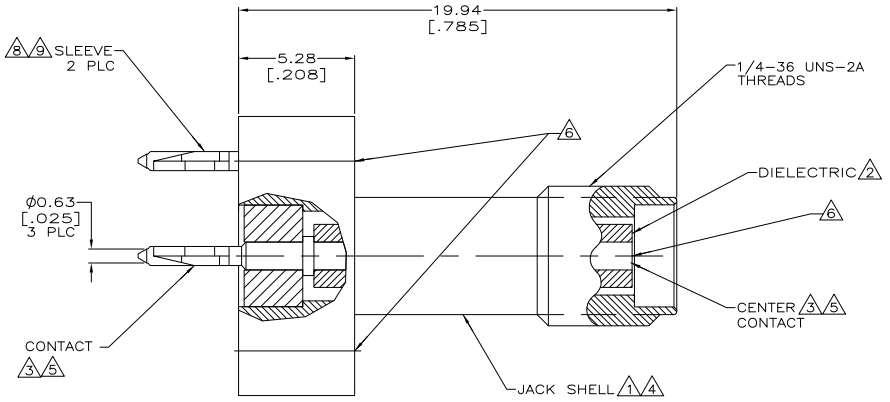

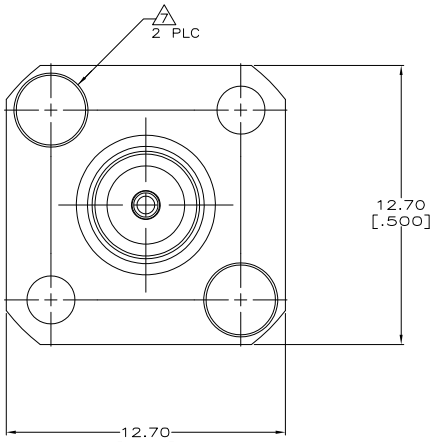

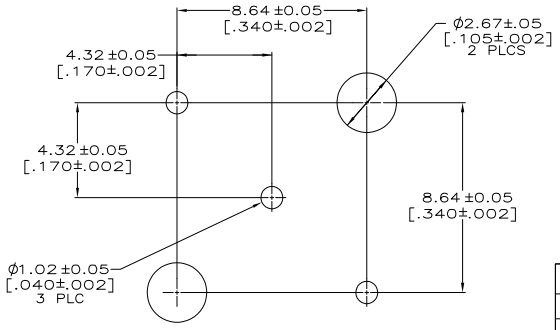

RECOMMENDED PCB CONFIGURATION

1274096

1274096-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13 [.005]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 1 2 3
FINISH 4 5

DWN	M. OBRINE	19AUG98
CHK	J. CABARLO	19AUG98
APVD	J. CABARLO	19AUG98
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

CUSTOMER DRAWING

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME JACK, ACTION PIN, PCB, SMA

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1274096	–

SCALE	SHEET	REV
8:1	1 OF 1	D

AMP 1471-9 REV 31MAR2000

Downloaded from Elcodis.com electronic components distributor